
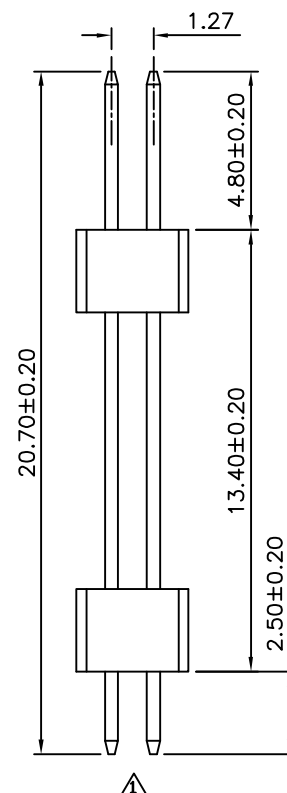
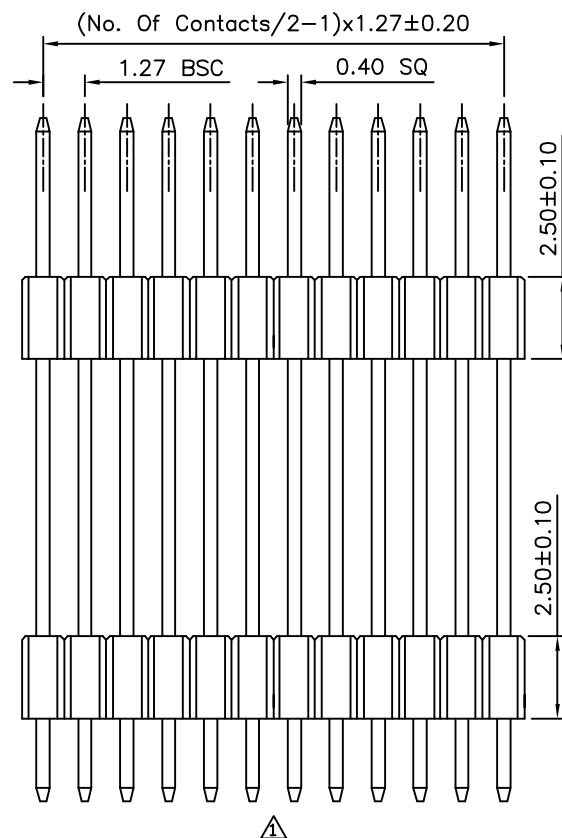
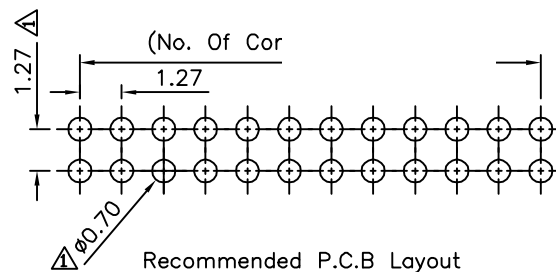


△ SPECIFICATION
 Current: 1A
 Insulation Resistance: 5000 Megaohms Min.
 Contact Resistance: 20 Milliohms Max.
 Dielectric Strength: 1000V AC Minute
 Operation Temperature: -55°C~+105°C
 Housing: PA6T(UL94V-0), Black
 Contact: Copper Alloy, Gold Flash
 No. Of Contacts: 04~100 Contacts
 RoHS Compliant

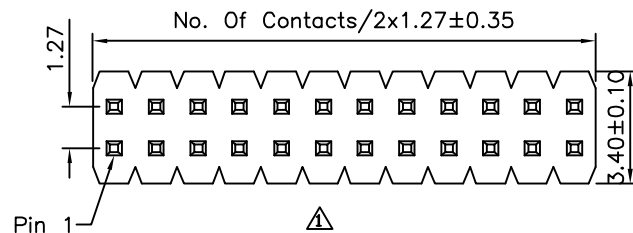

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19189

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

SCALE

NONE

REV.

A1

UNIT
 mm



△ A1

Modify Data

HZF

05/16/2011

△ A0

NEW RELEASE

HZF

04/28/2008

NO. REV.

REVISIONS

CHK

DATE