

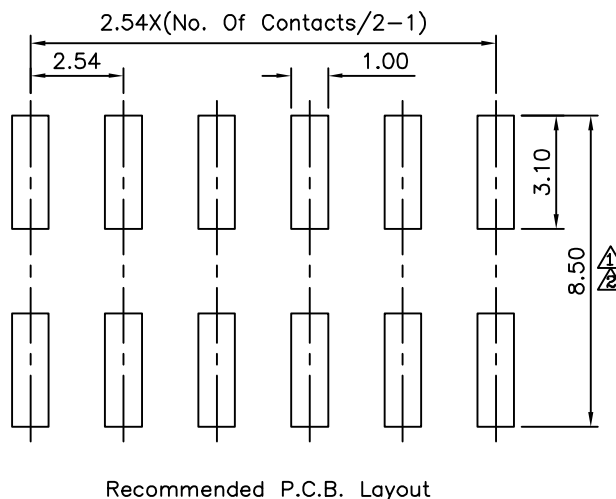
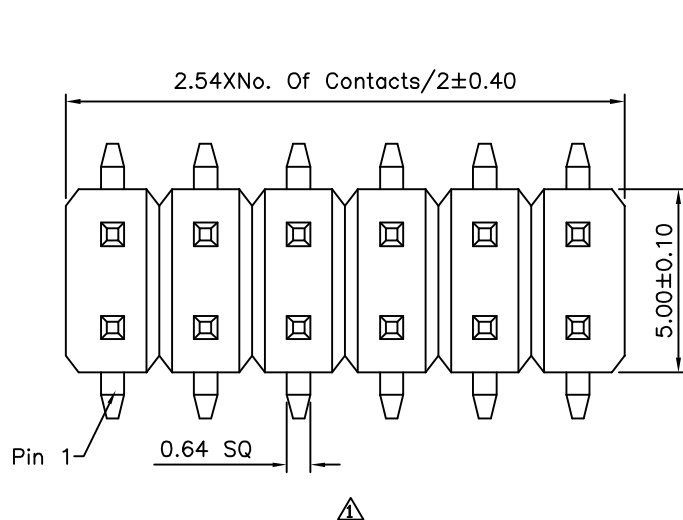


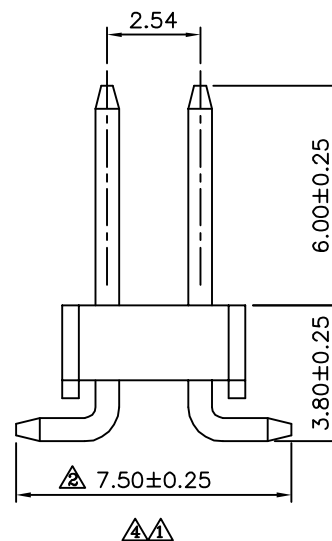

△ SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 △ No. Of Contacts:04~80 Contacts
 RoHS Compliant

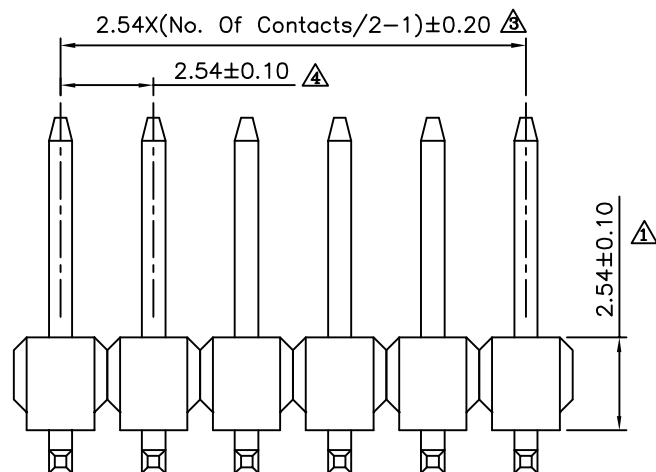

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19405

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

B4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.38
 .XX ± 0.25
 ANG. $\pm 5^\circ$

UNIT
 mm



△ B4

Modify Data

HZF

05/13/2013

△ B3

Modify Data

HZF

12/08/2010

△ B2

Modify Data

HZF

07/16/2010

△ B1

Modify Data

HZF

12/18/2009

△ B0

NEW RELEASE

HZF

02/01/2009

NO. REV.

REVISIONS

CHK

DATE