
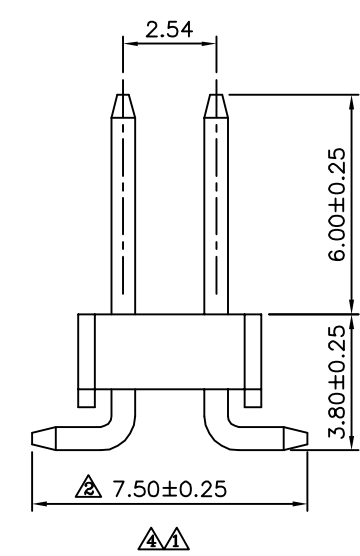


△ SPECIFICATION

Current Rating:3A  
 Withstand Voltage:1000V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black

△ Contact:Brass,Gold Flash Over Nickel  
 △ No. Of Contacts:04~80 Contacts  
 RoHS Compliant

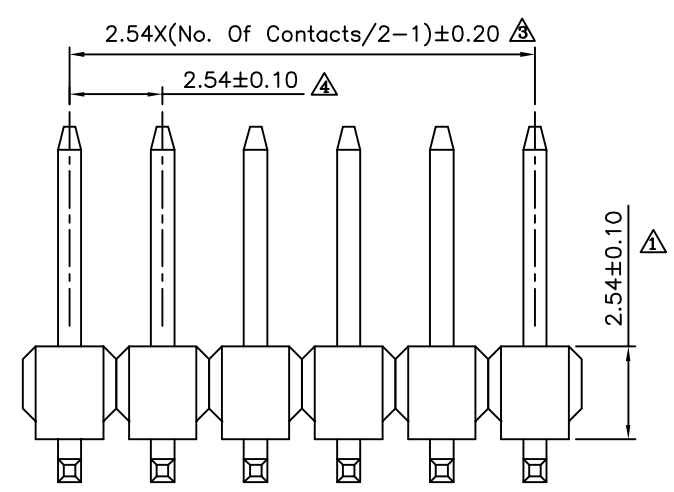

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°	△ B4	Modify Data	HZF	05/13/2013
19424		EMILY			△ B3	Modify Data	HZF	12/08/2010
		CHECKED BY			△ B2	Modify Data	HZF	07/16/2010
		HZF		△ B1	Modify Data	HZF	12/18/2009	
		DRAWING BY		△ B0	NEW RELEASE	HZF	02/01/2009	
		SONG		NO. REV.	REVISIONS	CHK	DATE	
SCALE	NONE	REV.	B4	UNIT	mm			