



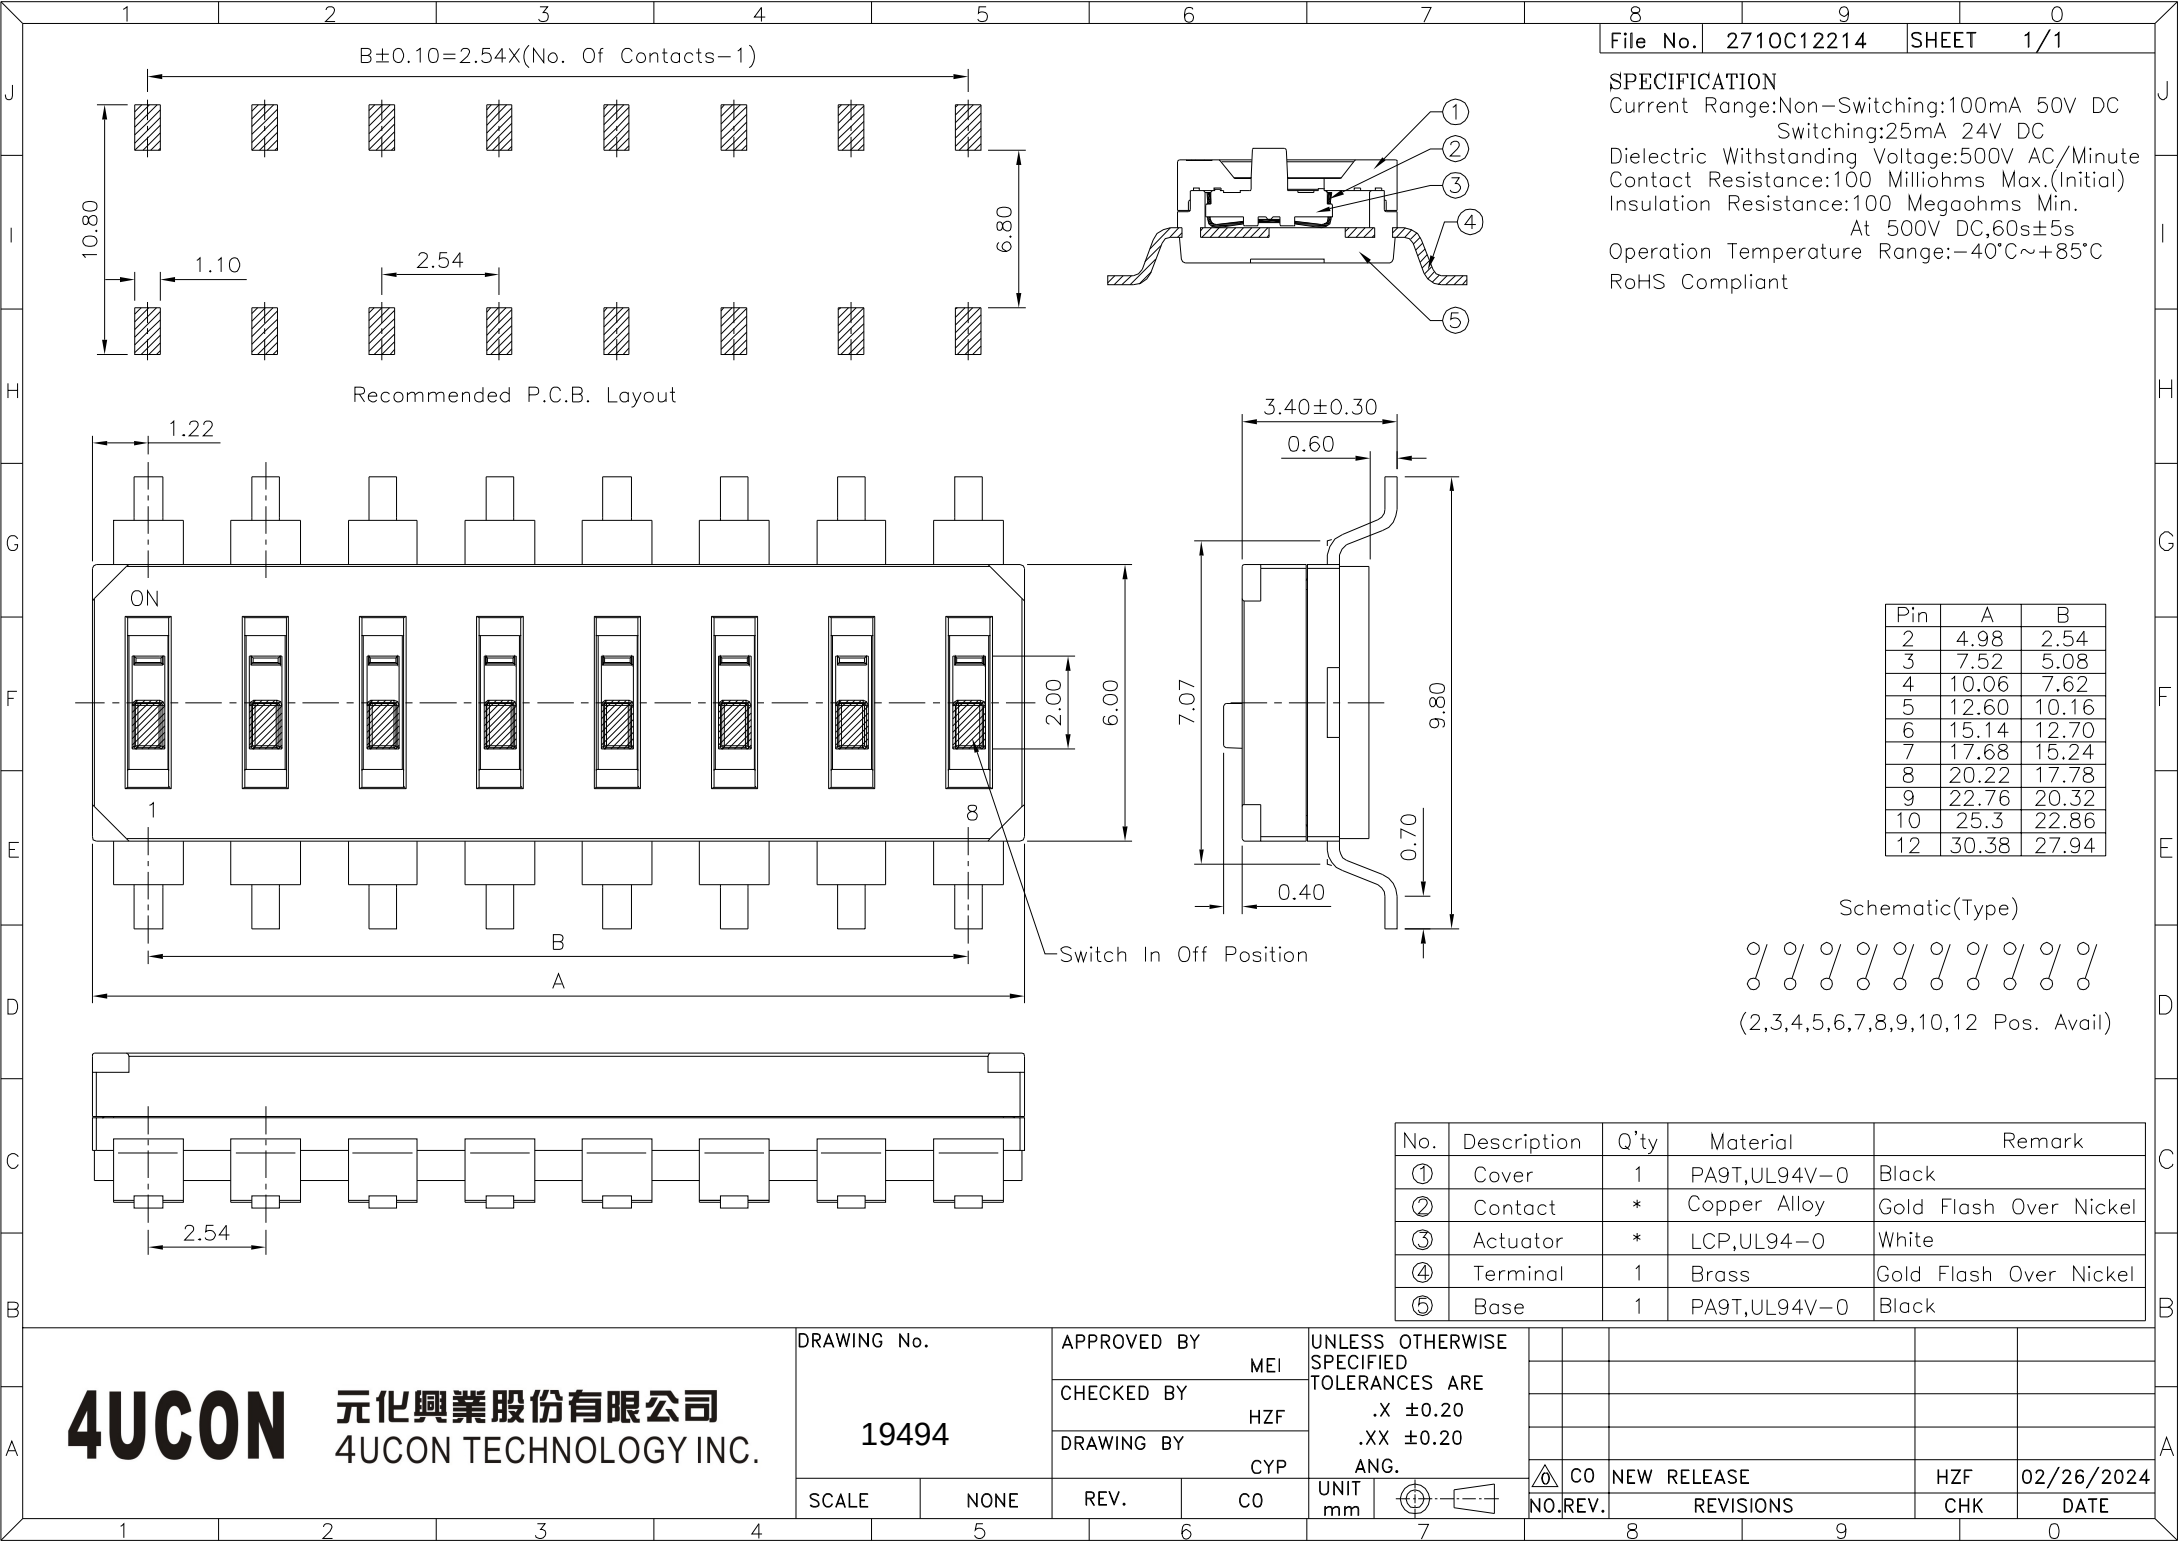

SPECIFICATION
Current Range:Non-Switching:100mA 50V DC
Switching:25mA 24V DC
Dielectric Withstanding Voltage:500V AC/Minute
Contact Resistance:100 Milliohms Max.(Initial)
Insulation Resistance:100 Megaohms Min.
At 500V DC,60s±5s
Operation Temperature Range:-40°C~+85°C
RoHS Compliant

Pin	A	B
2	4.98	2.54
3	7.52	5.08
4	10.06	7.62
5	12.60	10.16
6	15.14	12.70
7	17.68	15.24
8	20.22	17.78
9	22.76	20.32
10	25.3	22.86
12	30.38	27.94

Schematic(Type)



No.	Description	Q'ty	Material	Remark
①	Cover	1	PA9T,UL94V-0	Black
②	Contact	*	Copper Alloy	Gold Flash Over Nickel
③	Actuator	*	LCP,UL94-0	White
④	Terminal	1	Brass	Gold Flash Over Nickel
⑤	Base	1	PA9T,UL94V-0	Black

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19494

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

CO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.20
.XX ±0.20
ANG.

UNIT
mm



△

CO

NEW RELEASE

HZF

02/26/2024

NO.REV.

REVISIONS

CHK

DATE