


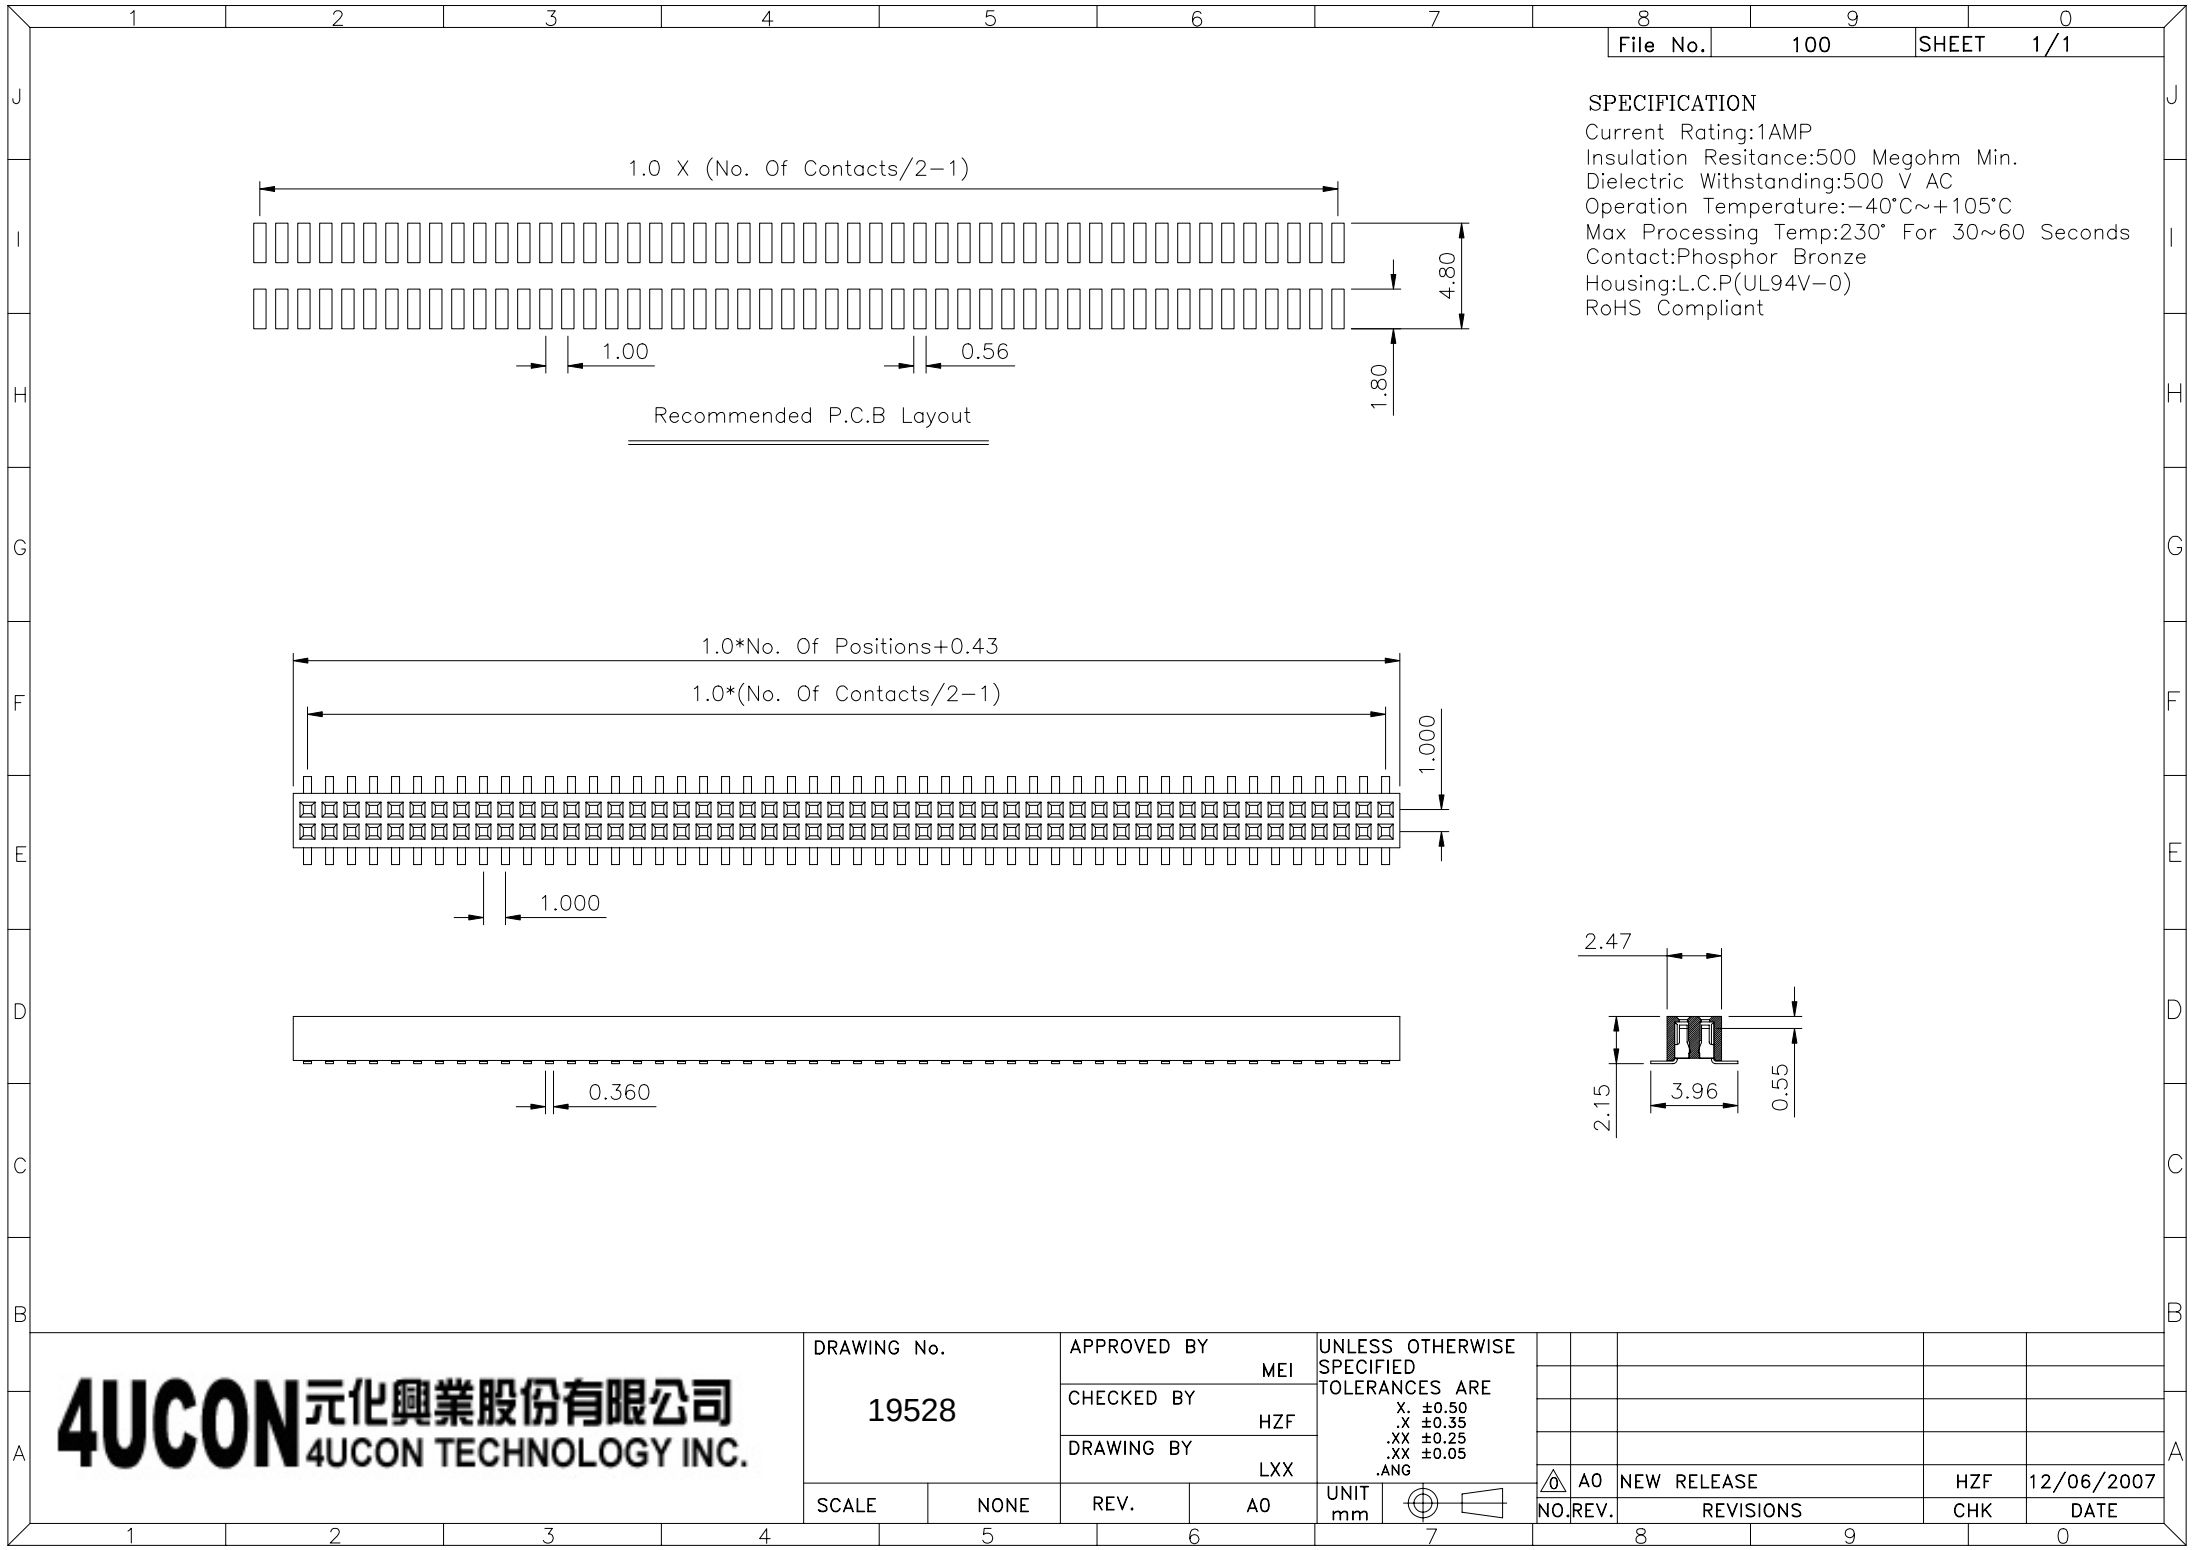

SPECIFICATION
Current Rating:1AMP
Insulation Resistance:500 Megohm Min.
Dielectric Withstanding:500 V AC
Operation Temperature:-40°C~+105°C
Max Processing Temp:230° For 30~60 Seconds
Contact:Phosphor Bronze
Housing:L.C.P(UL94V-0)
RoHS Compliant

DRAWING No. 19528		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .X ±0.35 .XX ±0.25 .XX ±0.05 .ANG					
		MEI							
		CHECKED BY							
		HZF							
		DRAWING BY							
		LXX							
SCALE	NONE	REV.	A0	UNIT				NO.	REV.
				mm				AO	NEW RELEASE
									</