

SPECIFICATIONS

Insulator:Nylon,UL 94V-2




Contact:Brass

Applicable Wire:#26

Electrical Rating:UL 250V 2A,AC/DC

CSA 250V 2A,AC/DC

Circuit: 2 ~28

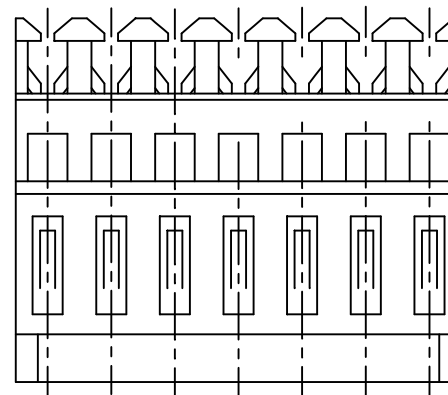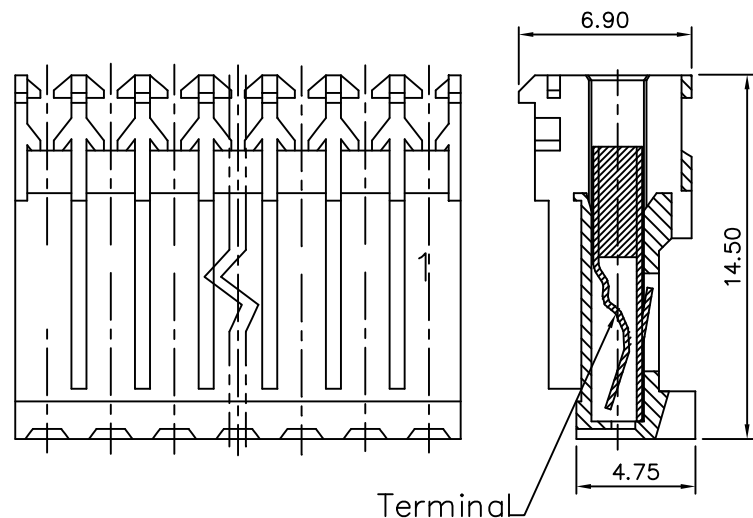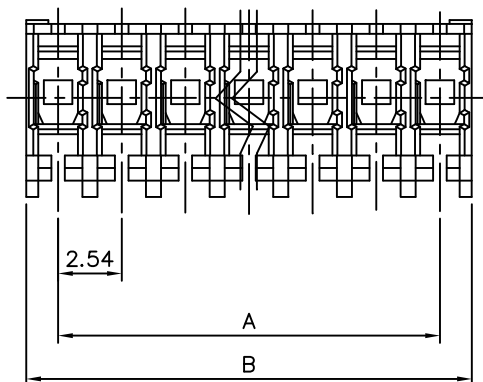

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.54	5.08	16	38.10	40.64
3	5.08	7.62	17	40.64	43.18
4	7.62	10.16	18	43.18	45.72
5	10.16	12.70	19	45.72	48.26
6	12.70	15.24	20	48.26	50.80
7	15.24	17.78	21	50.80	53.34
8	17.78	20.32	22	53.34	55.88
9	20.32	22.86	23	55.88	58.42
10	22.86	25.40	24	58.42	60.96
11	25.40	27.94	25	60.96	63.50
12	27.94	30.48	26	63.50	66.04
13	30.48	33.02	27	66.04	68.58
14	33.02	35.56	28	68.58	71.12
15	35.56	38.10			

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19546

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.20

ANG.

UNIT

mm



AO

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE

SCALE

NONE

REV.

AO