


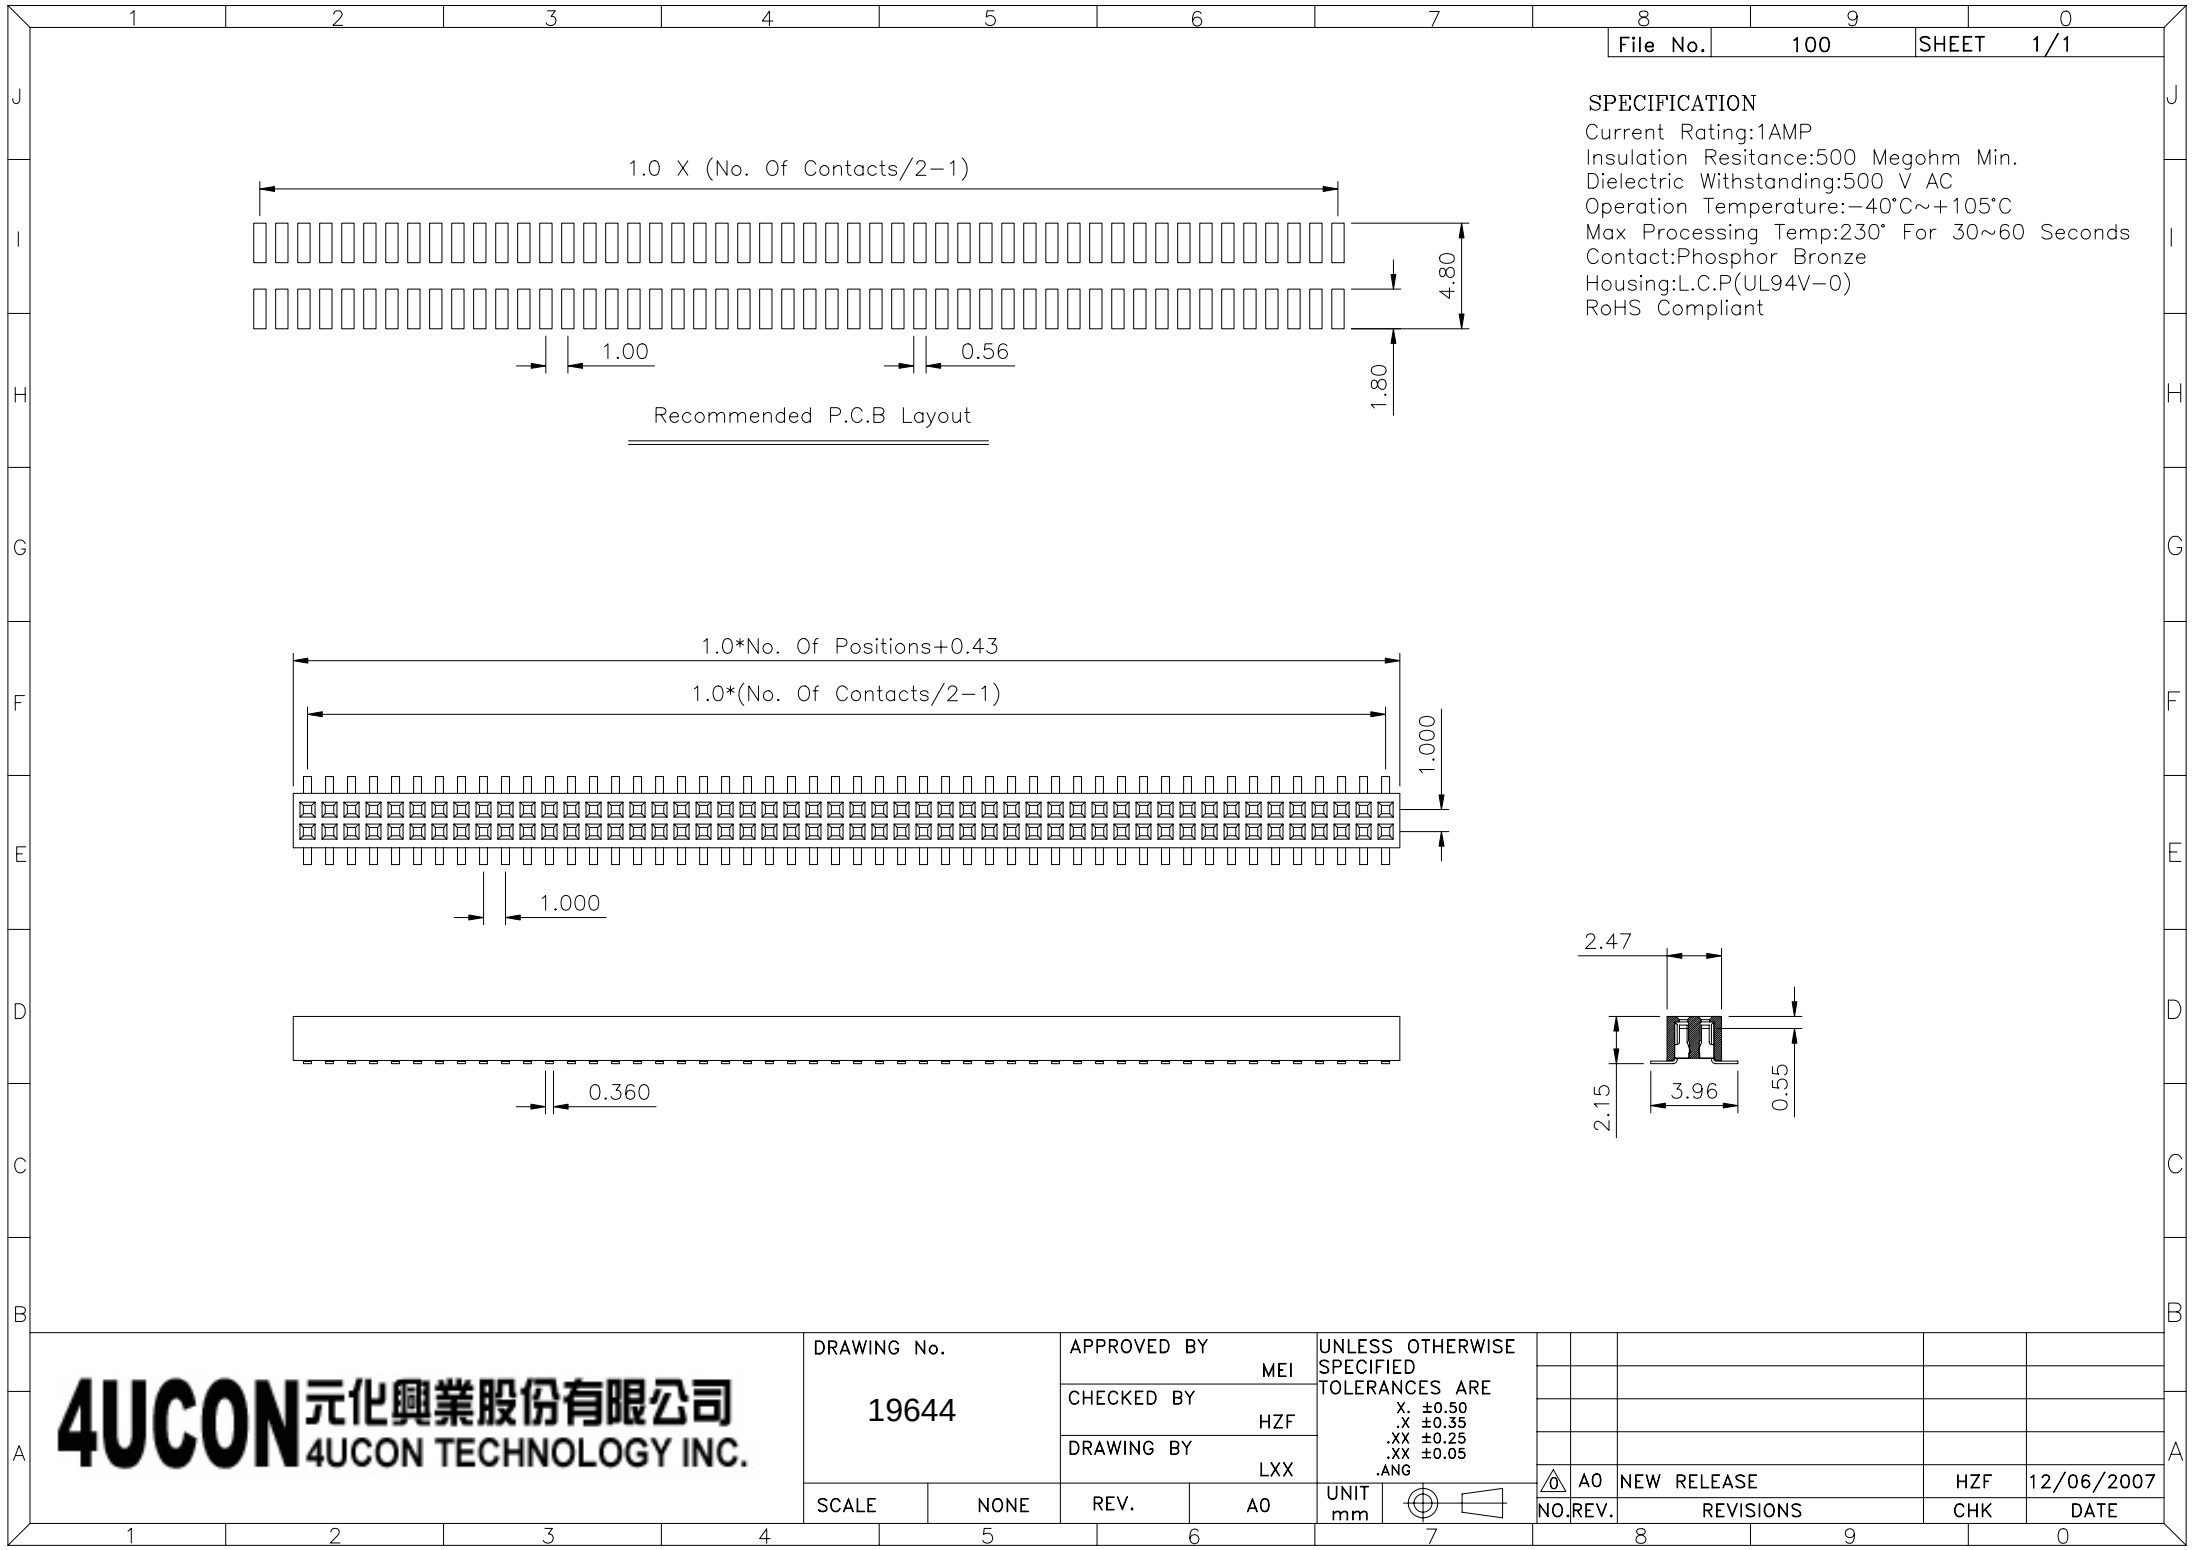

SPECIFICATION
Current Rating:1AMP
Insulation Resistance:500 Megohm Min.
Dielectric Withstanding:500 V AC
Operation Temperature:−40°C~+105°C
Max Processing Temp:230° For 30~60 Seconds
Contact:Phosphor Bronze
Housing:L.C.P(UL94V−0)
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 19644		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.35 .XX ±0.25 .XX ±0.05 .ANG						
		CHECKED BY HZF								
		DRAWING BY LXX								
SCALE	NONE	REV.	A0	UNIT mm			 A0	NEW RELEASE	HZF	12/06/2007
NO.		REV.		REVISIONS		CHK		DATE		