










SPECIFICATION

Current Rating:7A AC/DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
Temperature Range:-25°C~+120°C
Insulator:PA66(UL94V-0),Natural
RoHS Compliant



2 Pin

4 Pin

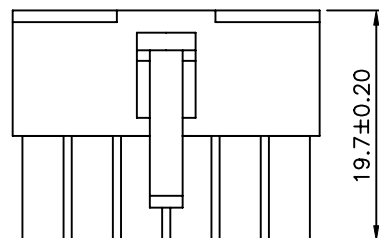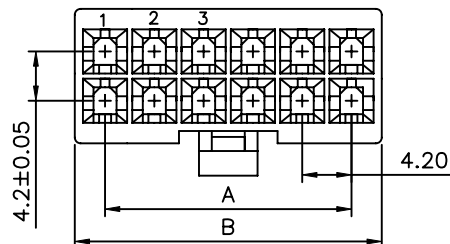

Circuits	A	B	Tolerance
2		5.5	A±0.20 B±0.30
4	4.20	9.7	
6	8.40	13.9	
8	12.60	18.1	A±0.30 B±0.40
10	16.80	22.3	
12	21.00	26.5	
14	25.20	30.7	A±0.40 B±0.50
16	29.40	34.9	
18	33.60	39.1	
20	37.80	43.3	A±0.40 B±0.50
22	42.00	47.5	
24	46.20	51.7	

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19909

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.5

.X ±0.25

.XX ±0.2

.XXX ±0.08

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

CHK

01/12/2010

DATE