
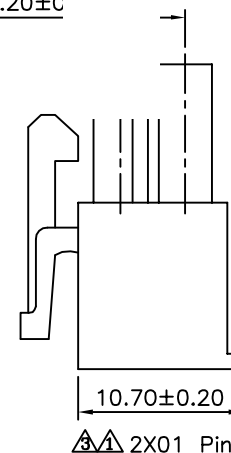
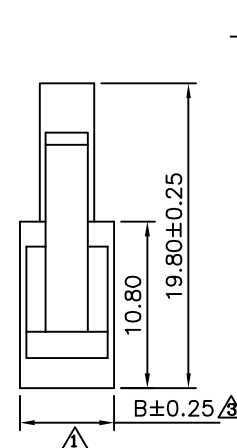
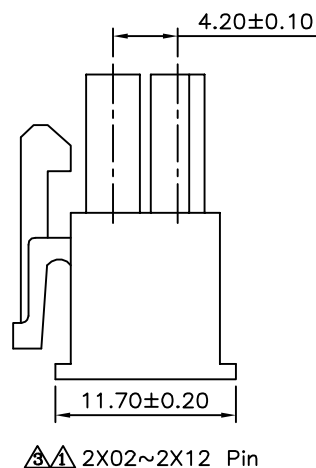
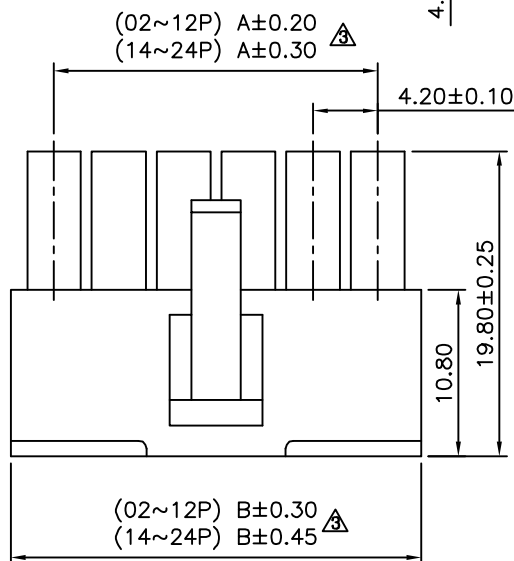



△ SPECIFICATION

Current Rating:7A AC/DC
Voltage Rating:600V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:10 Milliohms Max.
Operation Temperature:-25°C~+85°C
△ Insulator:PA66(UL94V-0),White
RoHS Compliant

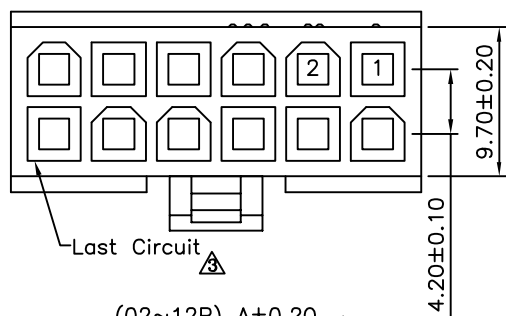

Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19910

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.


A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm



A3	Modify P/N:MF2XXXSH-XX-XX-H --> MF2XXXSH-XX-H	HZF	02/02/2015	
A2	Modify P/N:MF2XXXSH-H --> MF2XXXSH-XX-XX-H	HZF	06/26/2012	
A1	Modify Data	HZF	06/11/2012	
A0	NEW RELEASE	HZF	05/21/2011	
NO	REV	REVISIONS	CHK	DATE

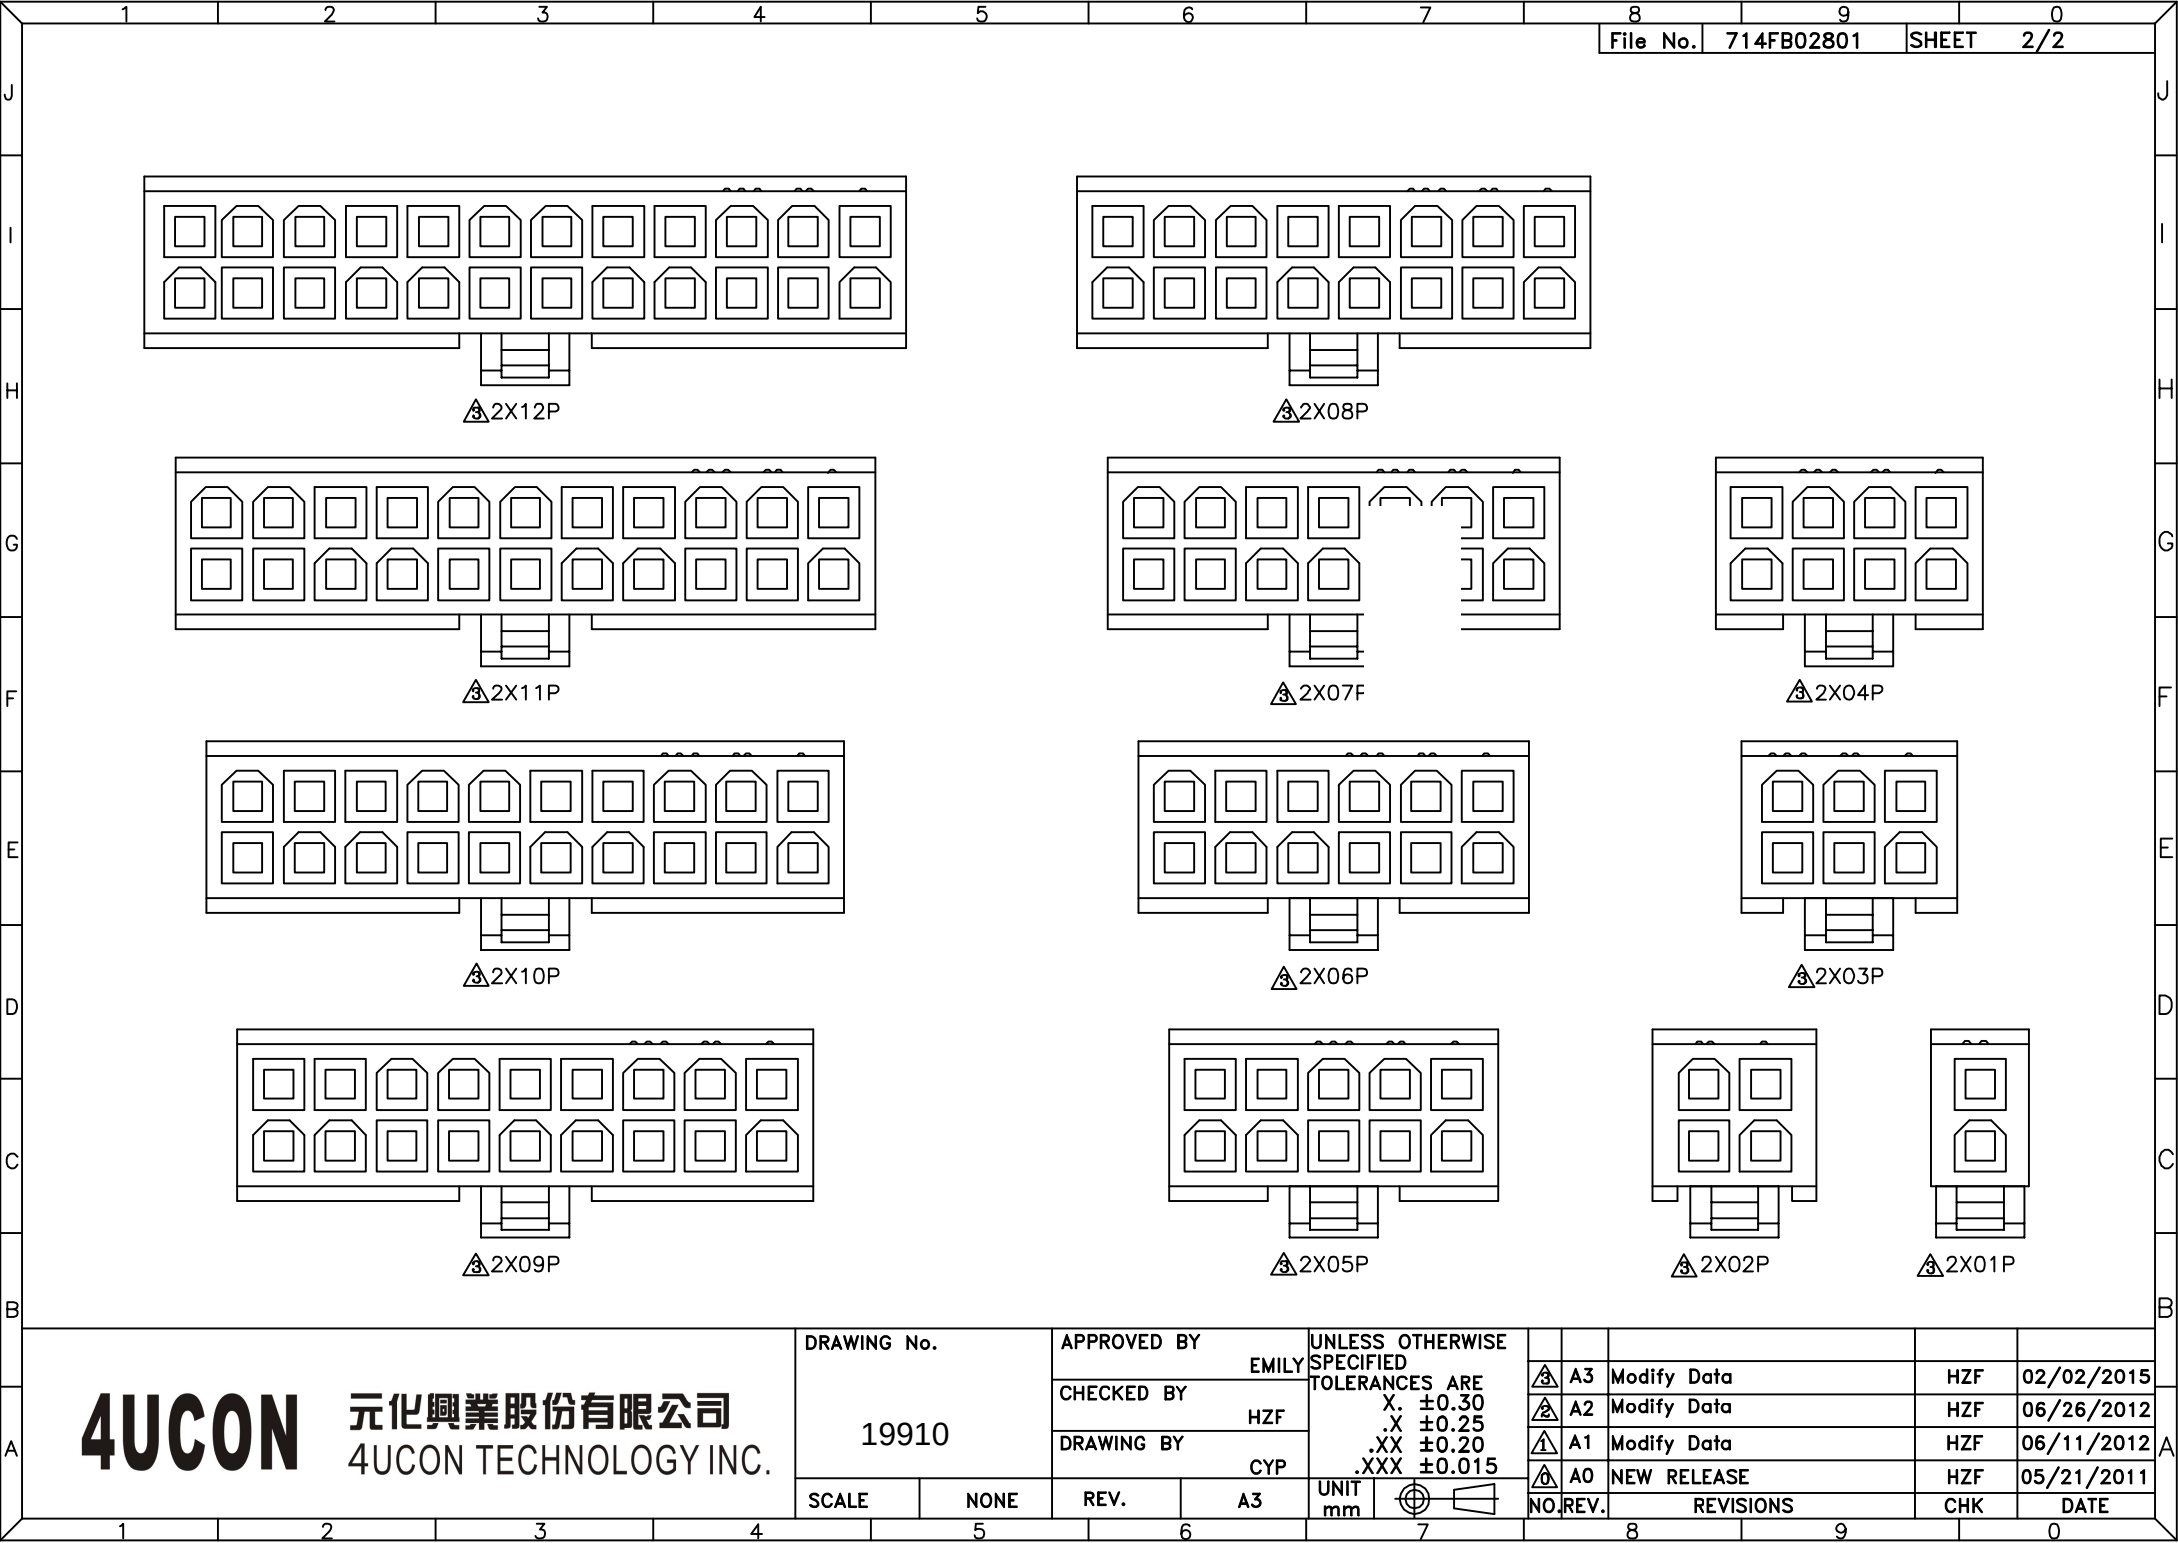

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	HZF
19910		DRAWING BY	CYP
		SCALE	NONE
		REV.	A3

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015
UNIT mm

⚠	A3	Modify Data	HZF	02/02/2015	
⚠	A2	Modify Data	HZF	06/26/2012	
⚠	A1	Modify Data	HZF	06/11/2012	
⚠	A0	NEW RELEASE	HZF	05/21/2011	
NO.	REV.	REVISIONS	CHK	DATE	