
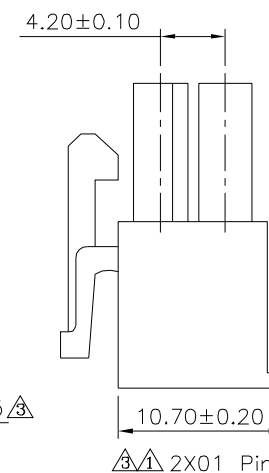
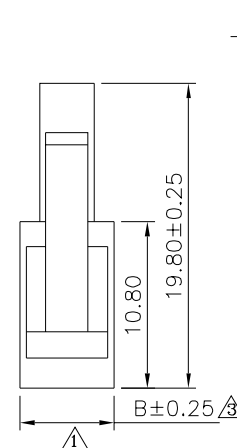
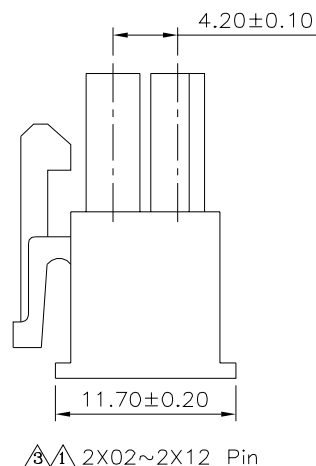
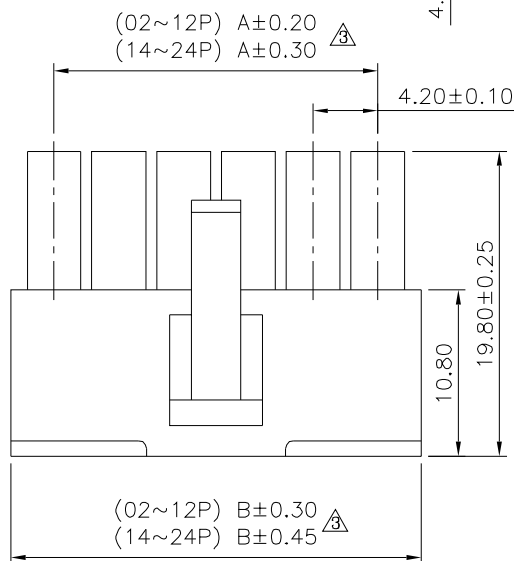



△ SPECIFICATION

Current Rating:7A AC/DC
Voltage Rating:600V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:10 Milliohms Max.
Operation Temperature:-25°C~+85°C
△ Insulator:PA66,UL94V-2,Nature Color
RoHS Compliant

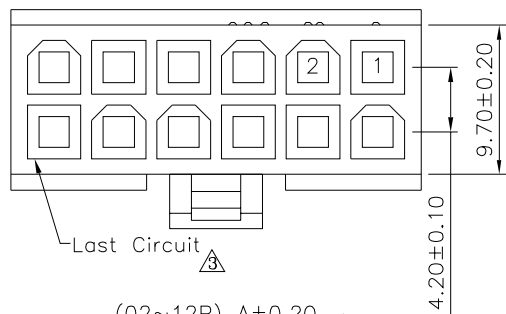

Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19911

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.


A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm




NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	02/02/2015
△	A2	Modify Data	HZF	06/26/2012
△	A1	Modify Data	HZF	06/11/2012
△	A0	NEW RELEASE	HZF	05/21/2011

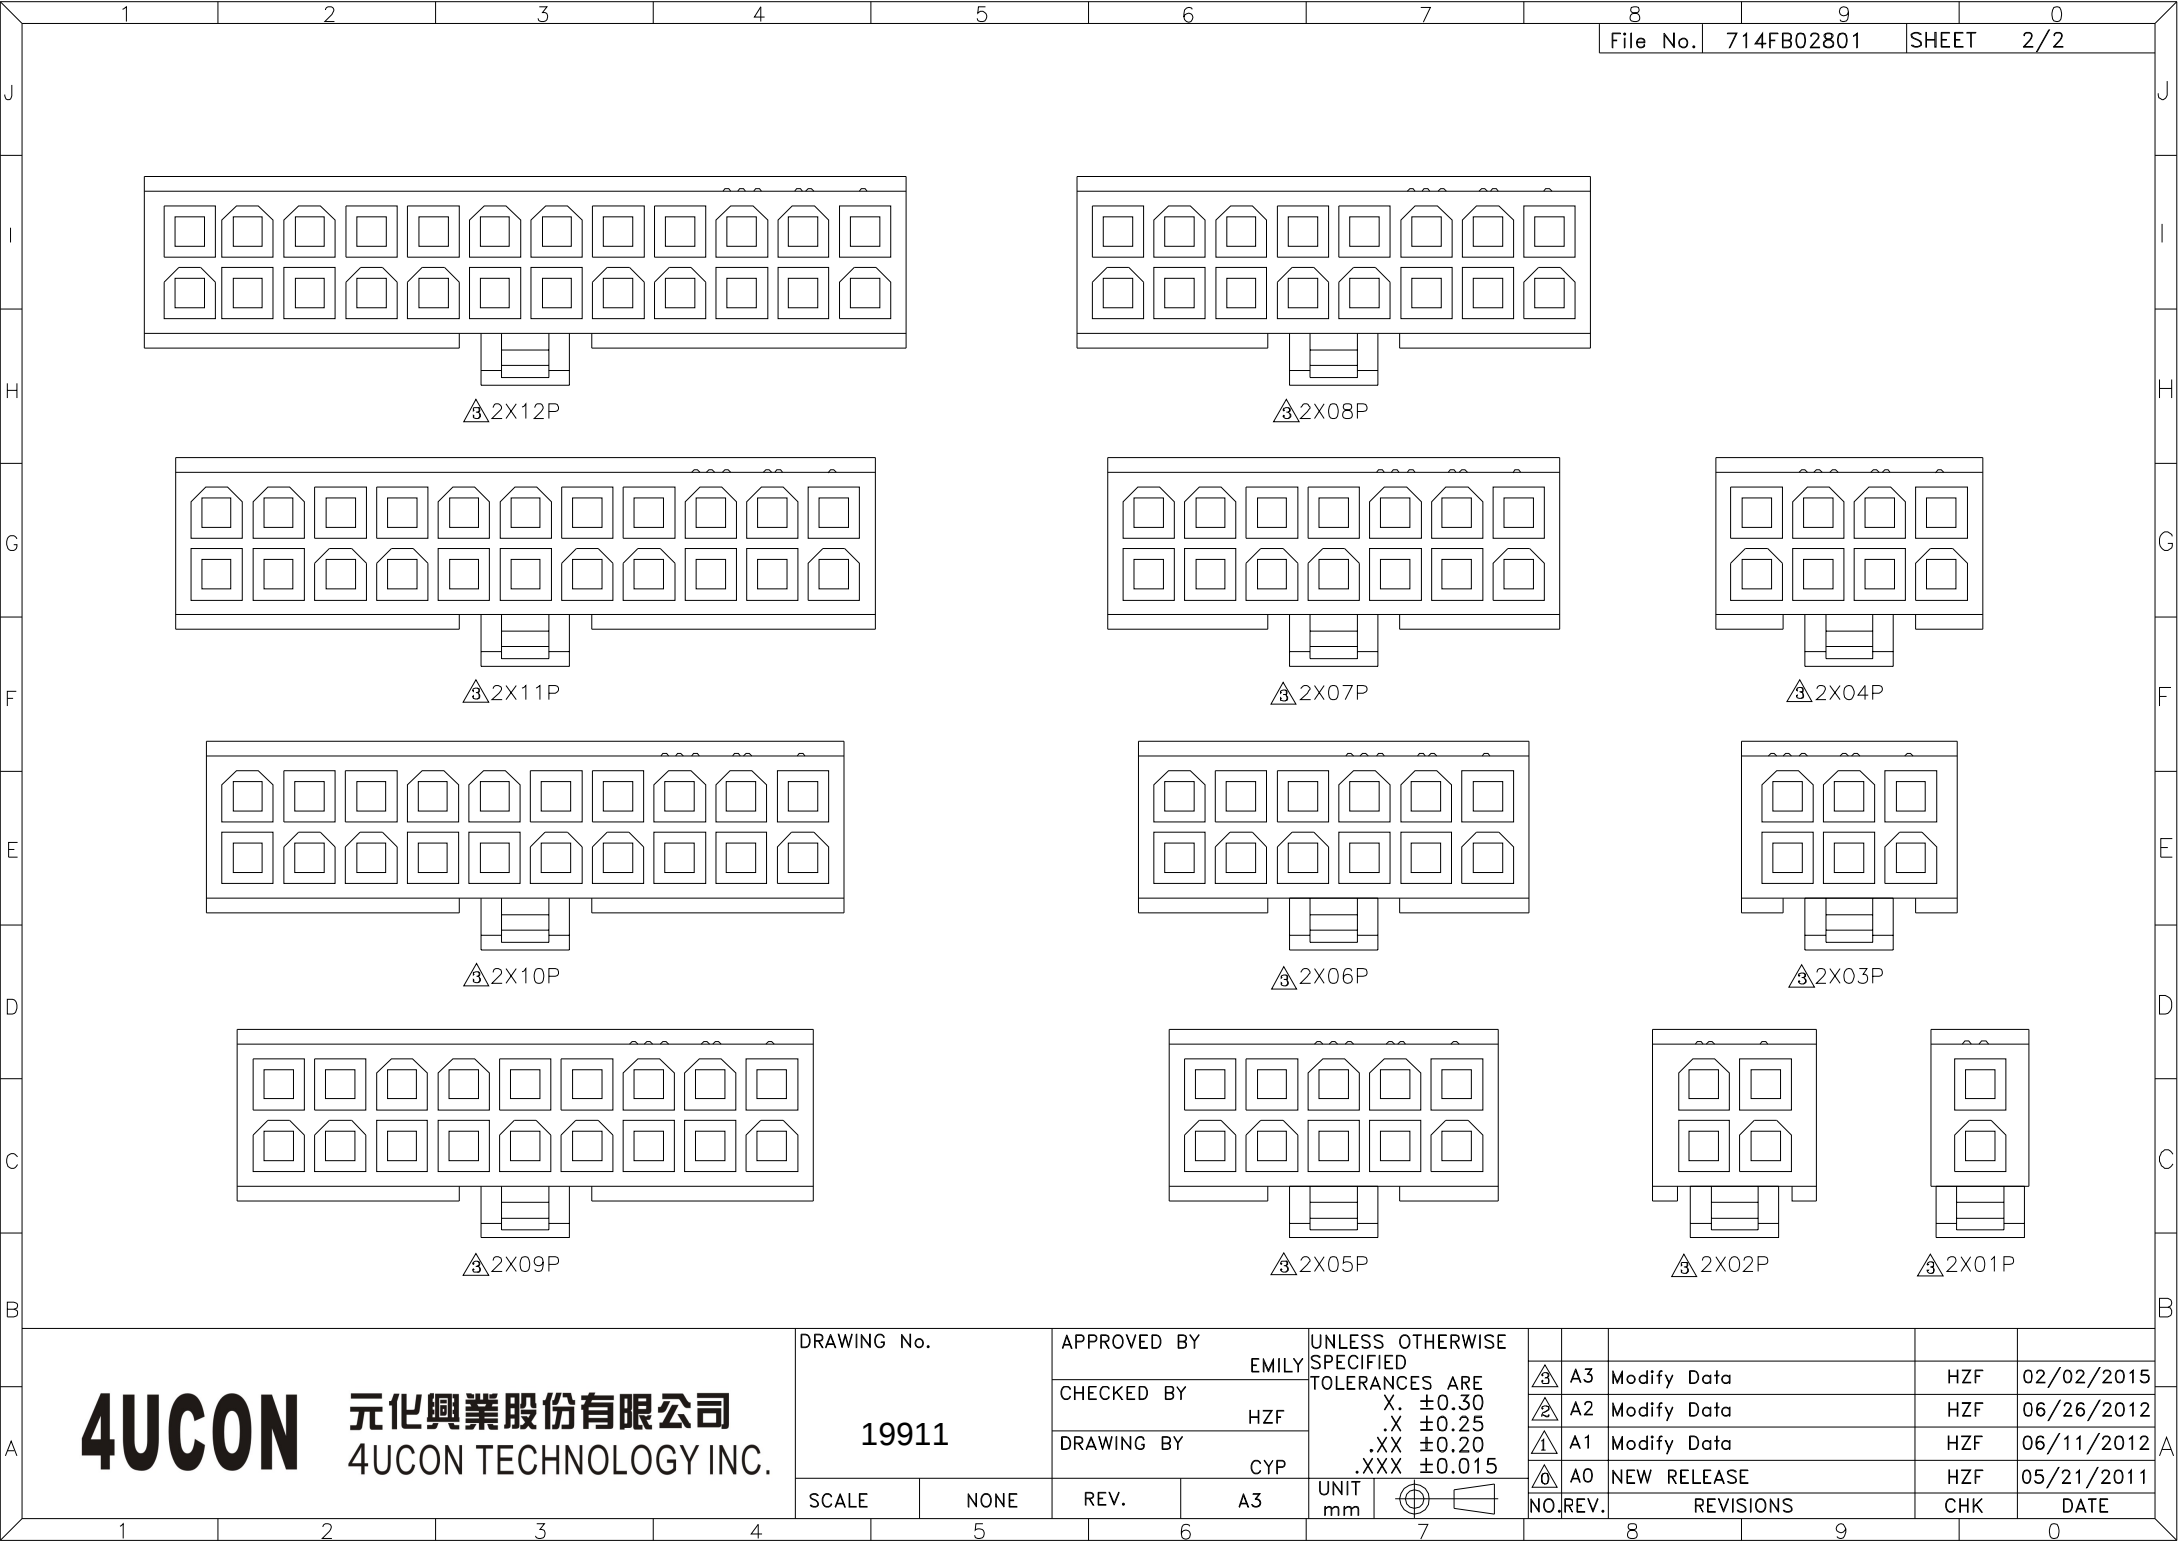

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	HZF
19911		DRAWING BY	CYP
		SCALE	NONE
		REV.	A3

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015
UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
③	A3	Modify Data	HZF	02/02/2015
②	A2	Modify Data	HZF	06/26/2012
①	A1	Modify Data	HZF	06/11/2012
④	A0	NEW RELEASE	HZF	05/21/2011