

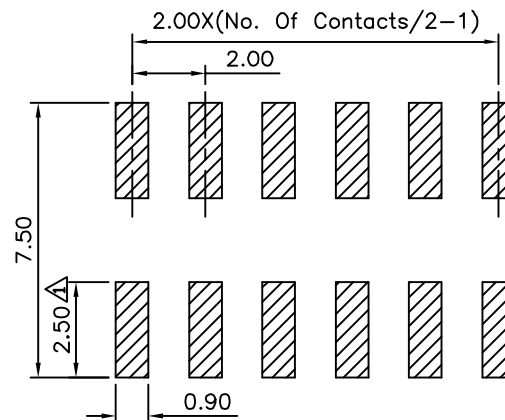
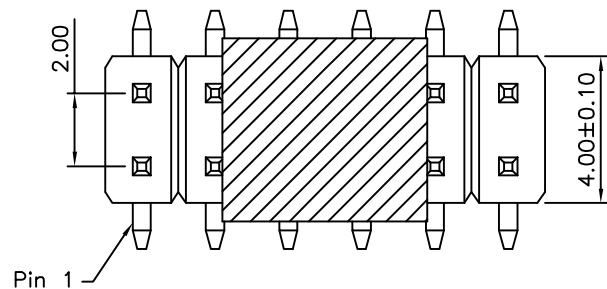


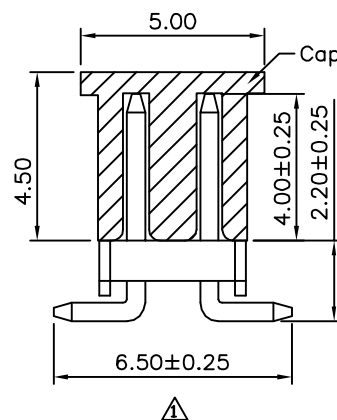

Recommended P.C.B. Layout

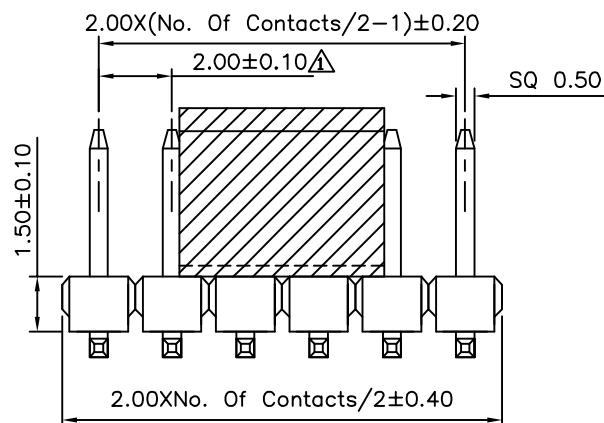

SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 ⚠ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19999

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



NO. REV.

A1

Modify Data

A0

NEW RELEASE

REVISIONS

CHK

DATE

HZF

01/26/2013

HZF

04/21/2010

