

4UCON



元化興業股份有限公司
4UCON TECHNOLOGY INC.

20029



File No. 182 SHEET 1/1

△ SPECIFICATION

Current:1A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Dielectric Strength:1000V AC Minute
Operation Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloy,Gold Flash
No. Of Contacts:2~50 Contacts
RoHS Compliant

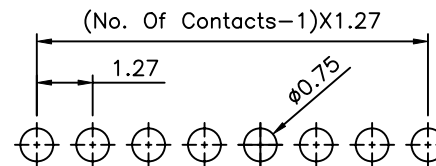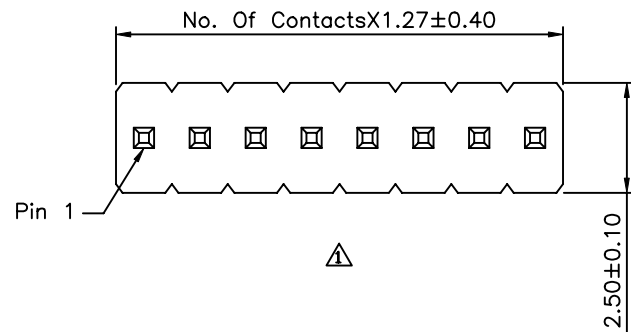

Recommended P.C.B. Layout

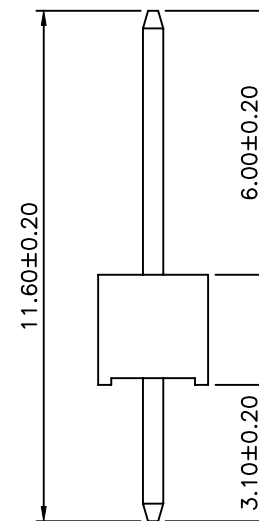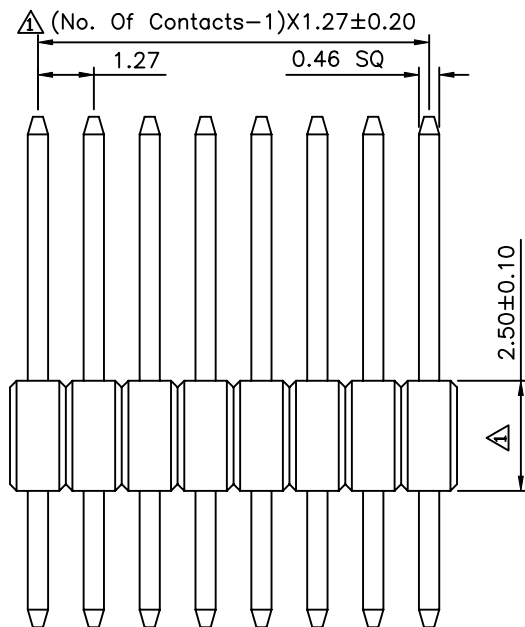

DRAWING No.

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

SCALE

NONE

REV.


A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm

△ A1

Modify Data

HZF

11/29/2010

△ A0

NEW RELEASE

HZF

07/13/2008

NO. REV.

REVISIONS

CHK

DATE