

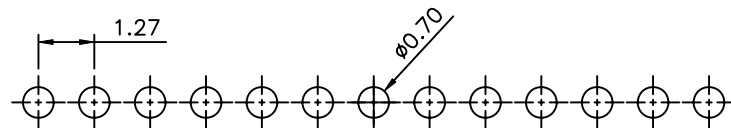



SPECIFICATION

Current Rating:1 Amp
Voltage Rating:500V AC/DC
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass
Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

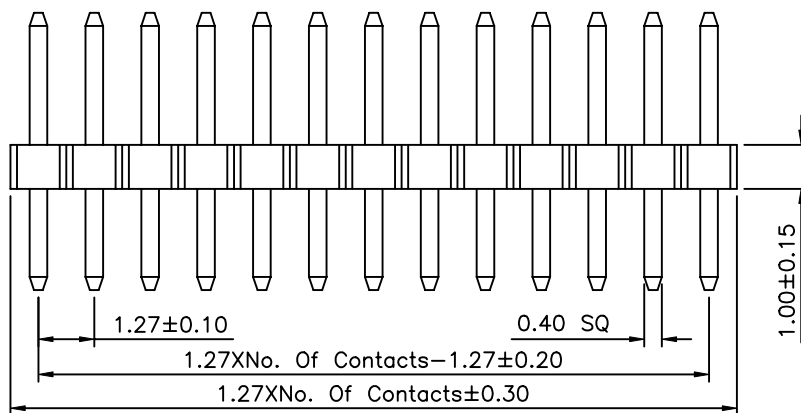

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

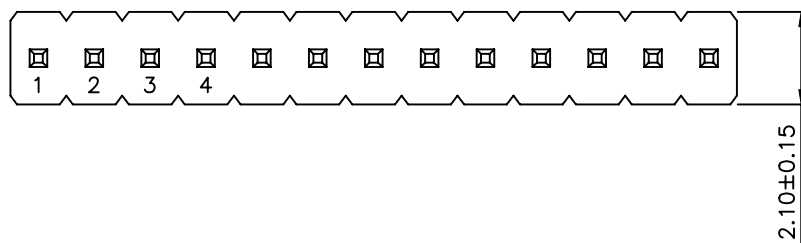

DRAWING No.

20119

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


QQJ

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



NO.

REV.

A1

A0

REVISIONS

Modify Data

NEW RELEASE

HZF

HZF

CHK

DATE

08/26/2010

02/16/2010