


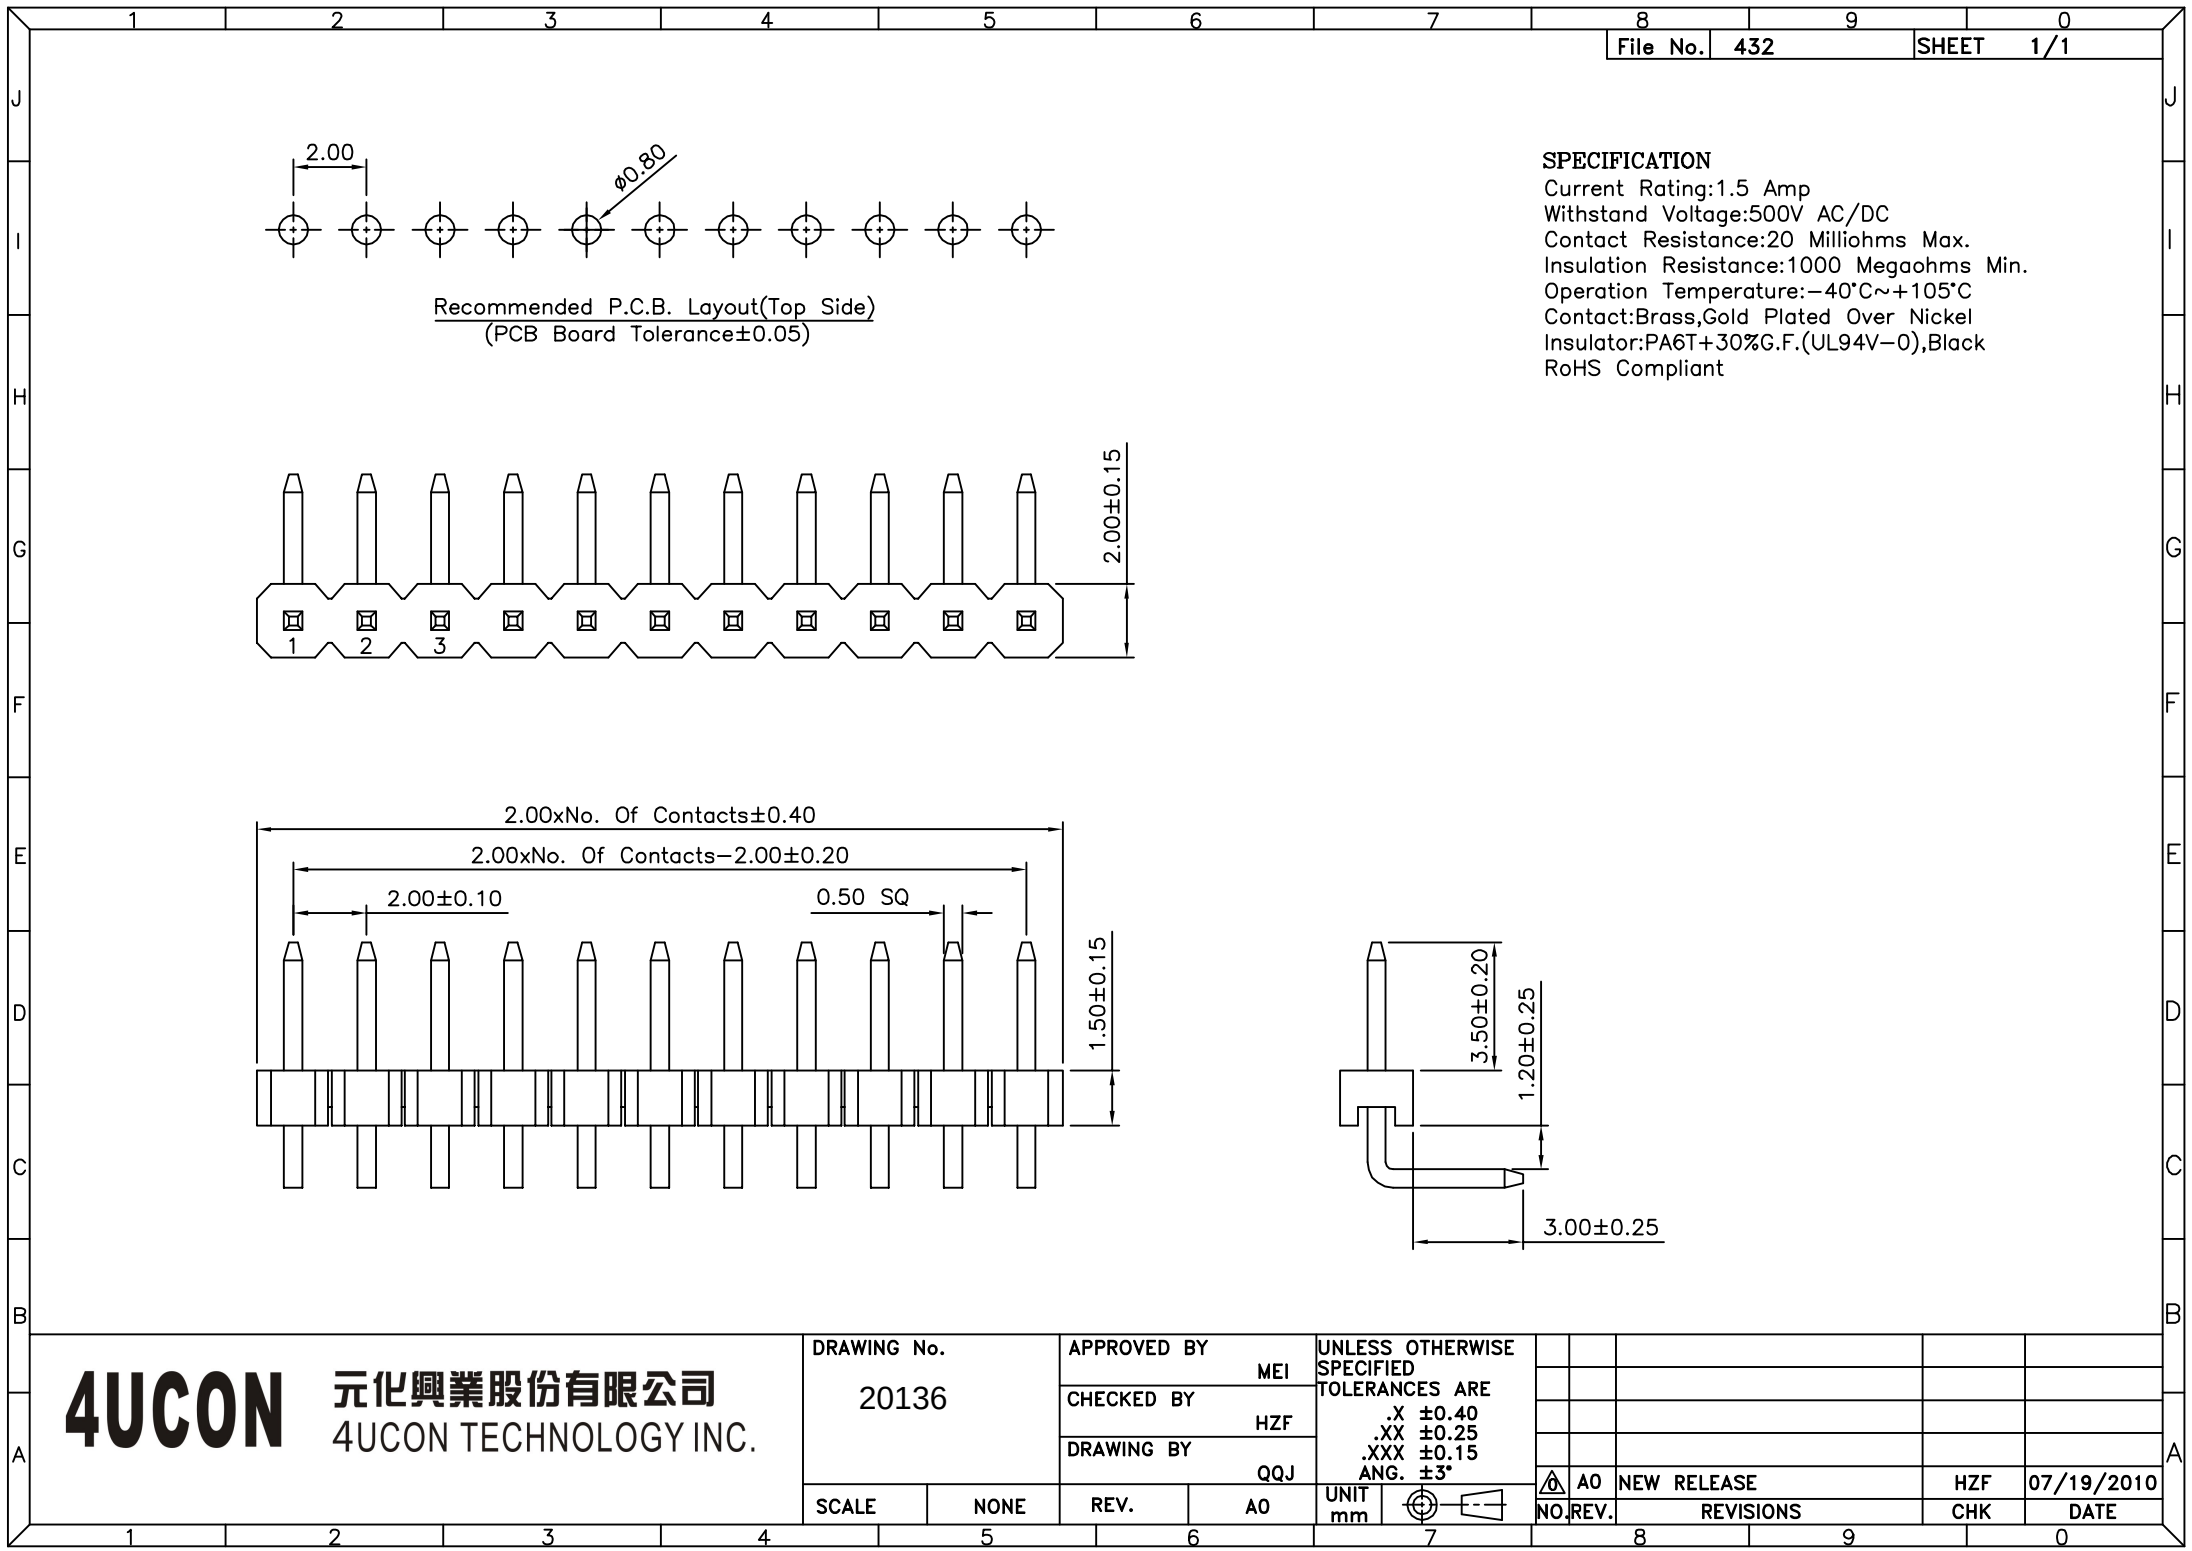

SPECIFICATION
Current Rating:1.5 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PA6T+30%G.F.(UL94V−0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

DRAWING No. 20136		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°						
		CHECKED BY HZF								
		DRAWING BY QQJ								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	HZF	07/19/2010
							NO. REV.	REVISIONS	CHK	DATE