
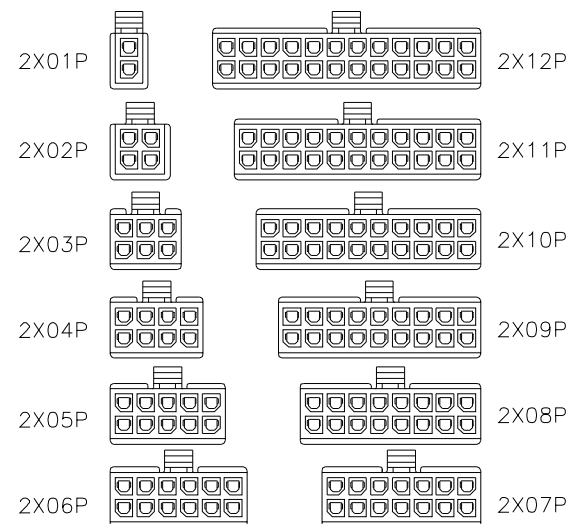
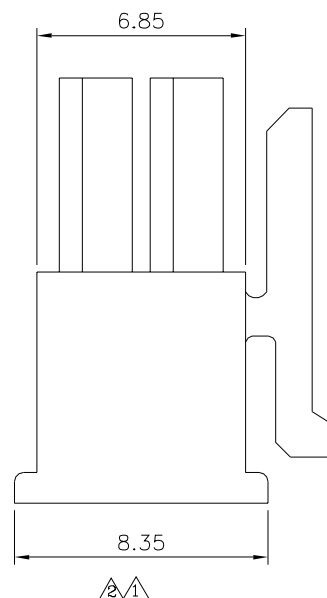
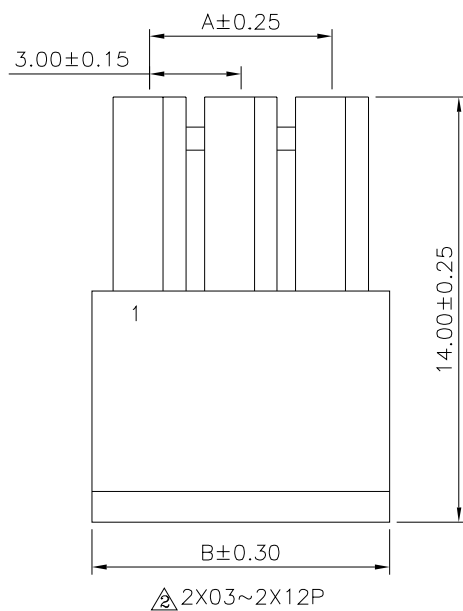
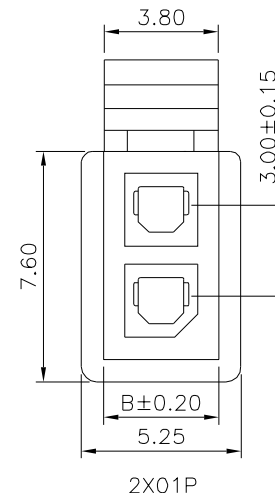
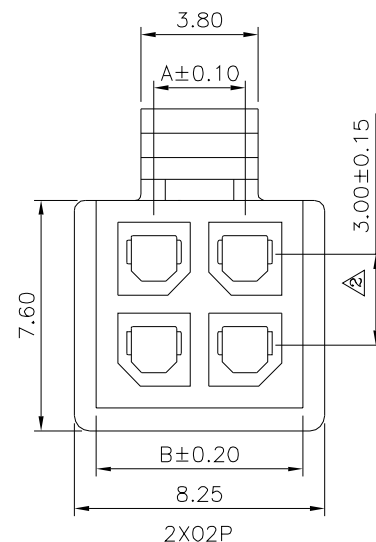


△ SPECIFICATION

1. Material & Finish
Insulator: PA66(UL94V-2), Black
2. Electrical Characteristics
Current Rating: 5A AC/DC
Voltage Rating: 250V AC/DC
Withstanding Voltage: 1500V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
3. Environmental Characteristics
Temperature Range: -25°C ~ +85°C
4. RoHS Compliant

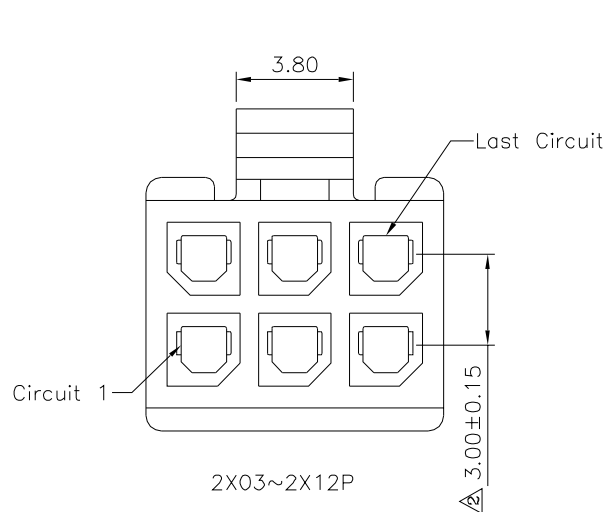

Pin	A	B
02	3.85	
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20168

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.05
ANG. ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△2	B2	Modify Data	HZF	09/27/2023
△1	B1	Modify Data	HZF	09/24/2019
△0	B0	NEW RELEASE	HZF	02/17/2016