
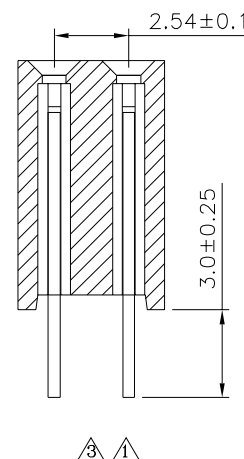
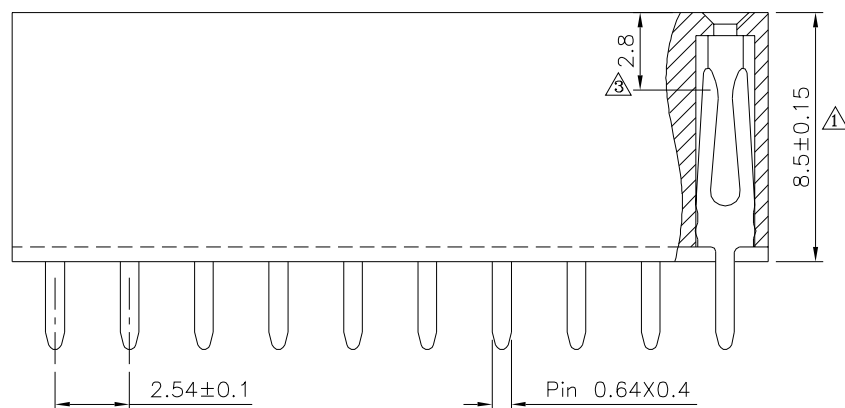
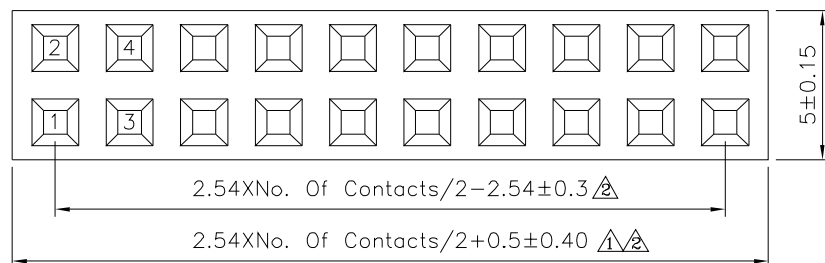


SPECIFICATION

Current Rating:3 Amps

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Brass,Gold Flash Over Nickel
- Insulator:PBT(UL94V-0),Black
- RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

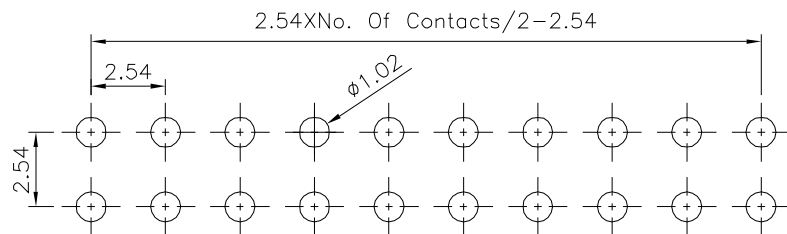

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20669

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SAN

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*
UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	10/30/2021
A2		Modify Data	HZF	05/28/2014
A1		Modify Data	HZF	09/03/2013
A0		NEW RELEASE	HZF	08/03/2011