

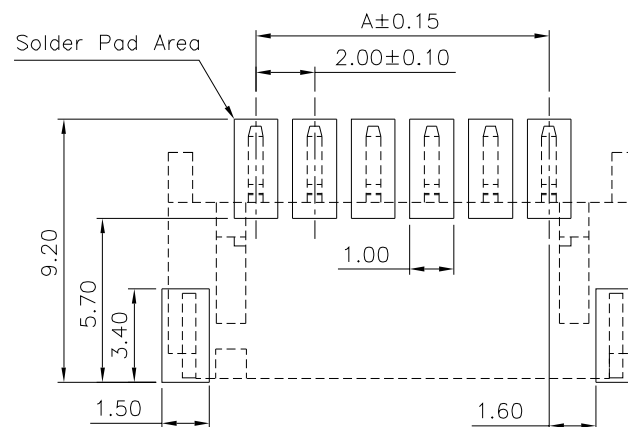
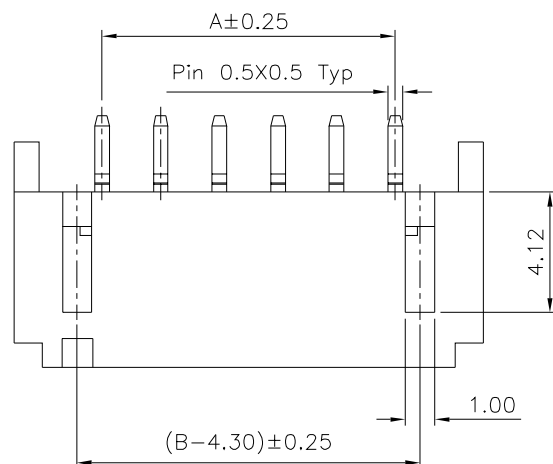



△ SPECIFICATION

Current Rating:2A AC/DC
Voltage Rating:100V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:800V AC/Minute
Temperature Range:-25°C~+85°C
Insulator:LCP+30%G.F.(UL94V-0),Black
Pin:Brass,Tin Plated Over Nickel
Latch:Brass,Tin Plated Over Nickel
RoHS Compliant

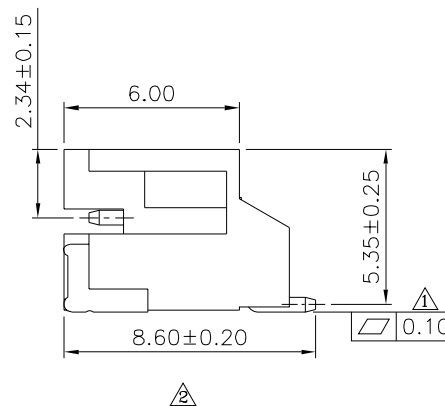

Recommended P.C.B Layout(Top Side)
P.C.B Thickness=1.20~1.60mm(Tolerance=±0.05)

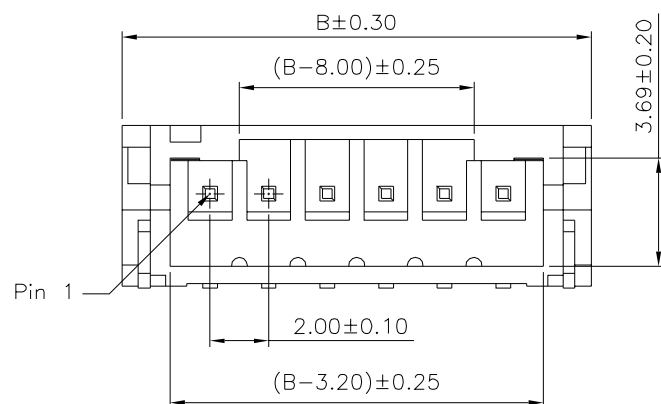

Pin	A	B	Pin	A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20718

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.25

.XX ±0.20 .X* ±2*

.XXX ±0.10 .XX* ±1*

UNIT

mm



NO. REV. A2

Modify Data HZF 03/01/2016

A1

Modify Data HZF 11/04/2013

A0

NEW RELEASE HZF 05/09/2012

REVISIONS

CHK DATE

SCALE

NONE

REV.

A2