| File No. | 697NE30001 | SHEET | 1/1 |
|---|---|---|---|

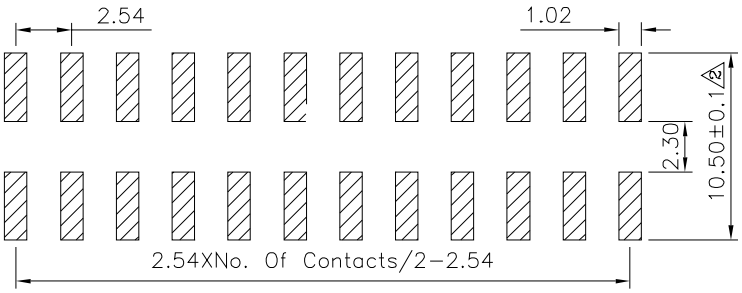


1 Recommended P.C.B. Layout
PCB Tolerance:±0.05 (Top View)

SPECIFICATION
Current Rating:3 Amps
1 Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
2 Insulator:PA9T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

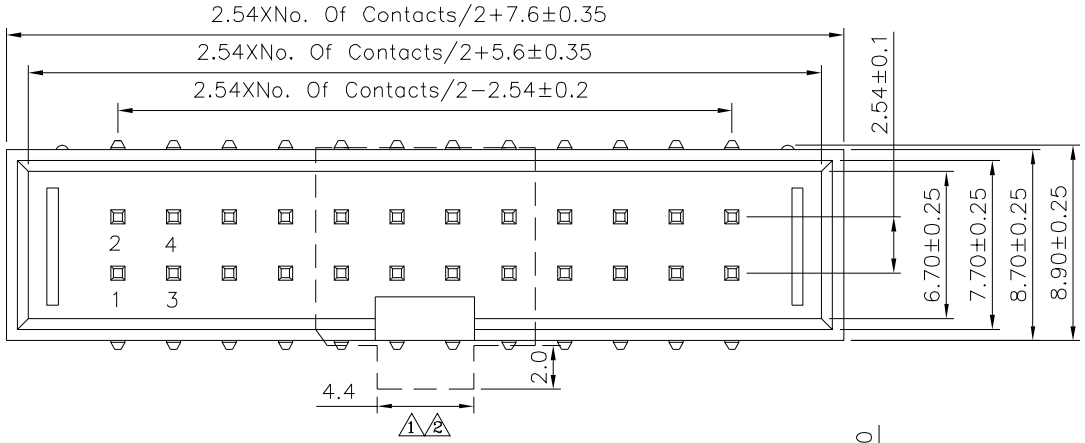


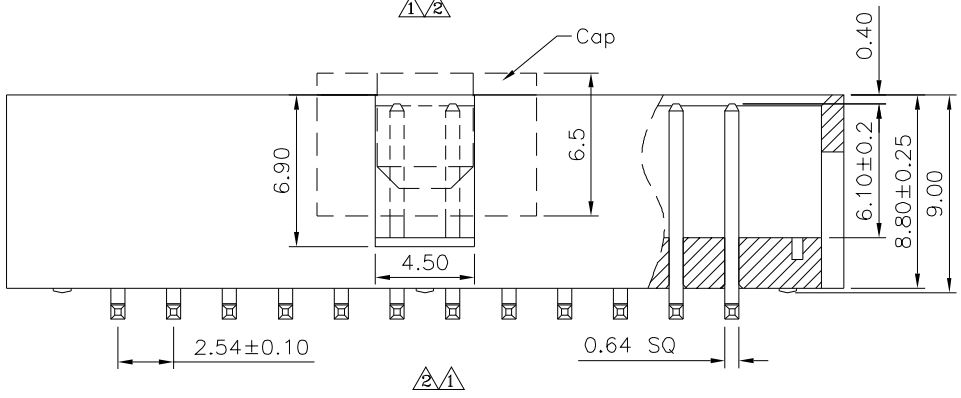


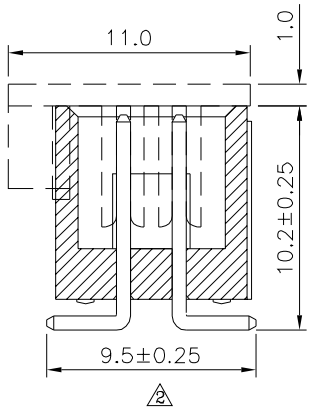


**4UCON** 元化興業股份有限公司
4UCON TECHNOLOGY INC.

| DRAWING No. | APPROVED BY | CHECKED BY | DRAWING BY | SCALE | REV. |
|---|---|---|---|---|---|
| 20863 | MEI | HZF | CYP | NONE | A2 |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|---|---|---|---|---|
| 2 | A2 | Modify Data | HZF | 05/30/2023 |
| 1 | A1 | Modify Data | HZF | 01/14/2019 |
| 0 | A0 | NEW RELEASE | HZF | 11/27/2015 |