


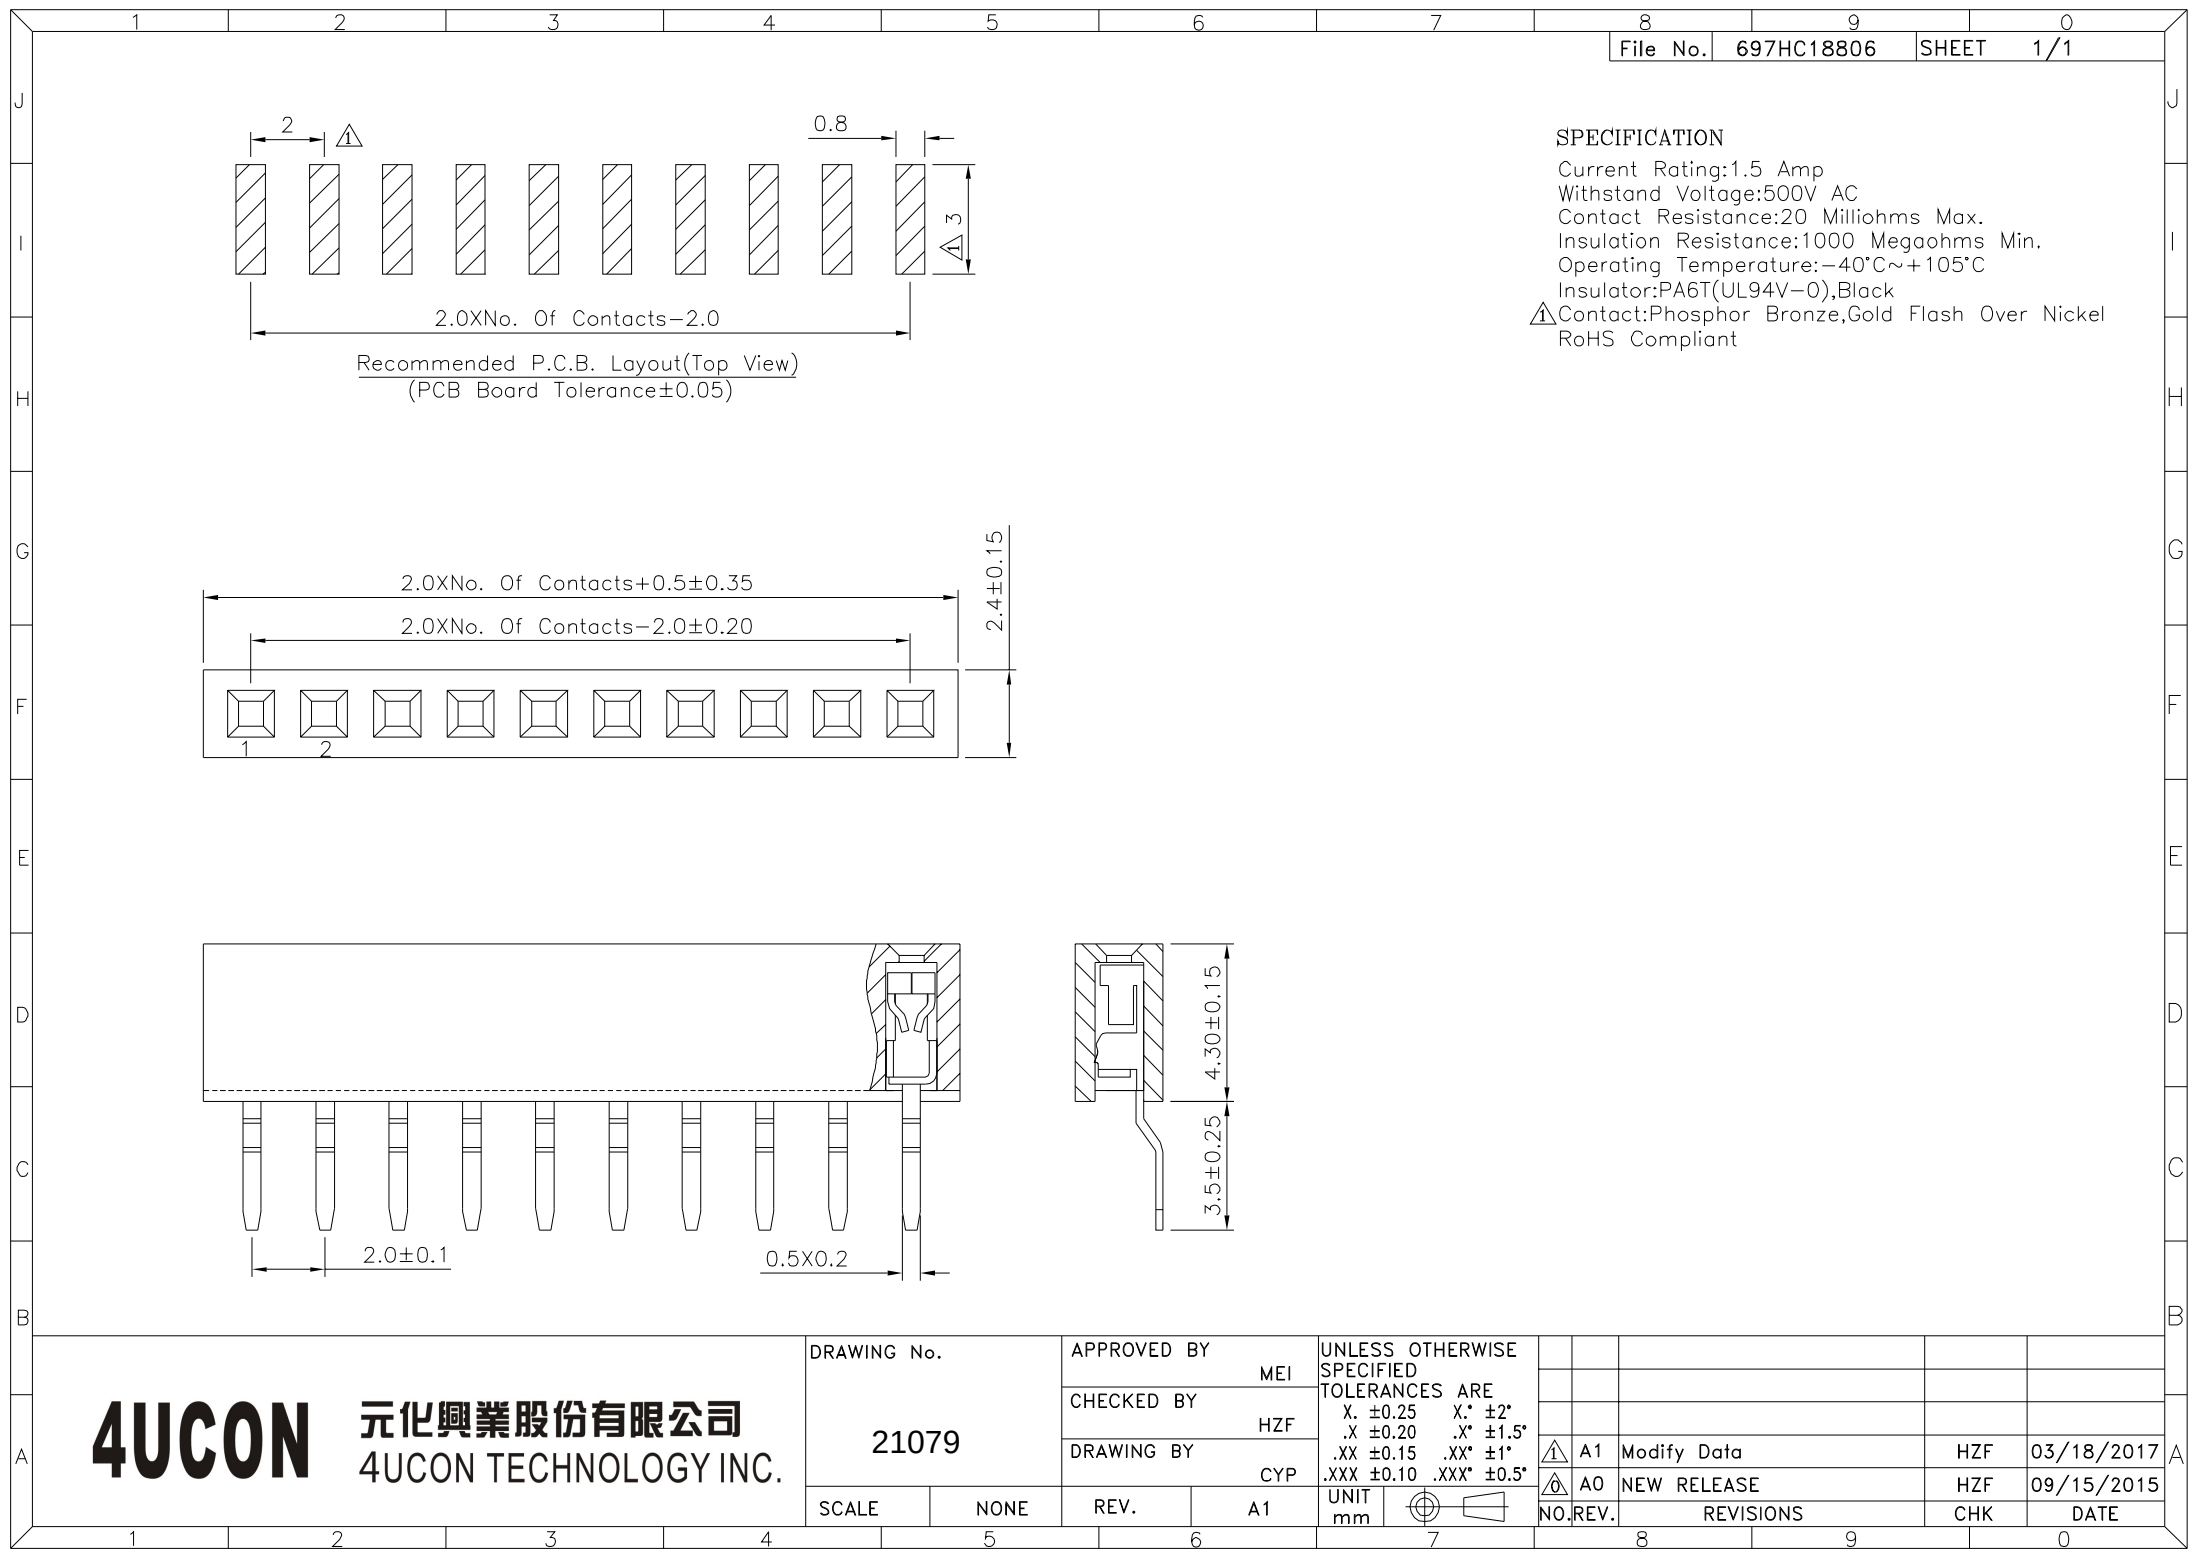

SPECIFICATION

Current Rating:1.5 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
⚠Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21079

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



NO.

REV.

REVISIONS

CHK

DATE

A1 Modify Data HZF 03/18/2017

A0 NEW RELEASE HZF 09/15/2015