




SPECIFICATION
Rating:12V DC 50mA
Travel:0.25±0.05mm
Withstand Voltage:100V 50Hz/Minute
Insulation Resistance:100 Megaohms
Contact Resistance:100 Milliohms
Durability:100000 Cycles
Operating Force:260±50gf
RoHS Compliant

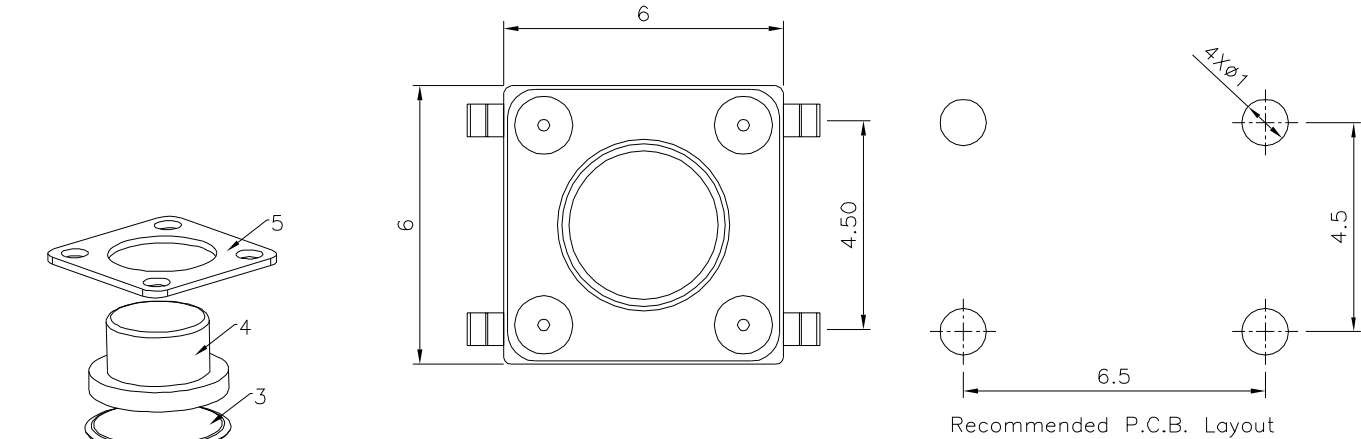

Recommended P.C.B. Layout



Schematic

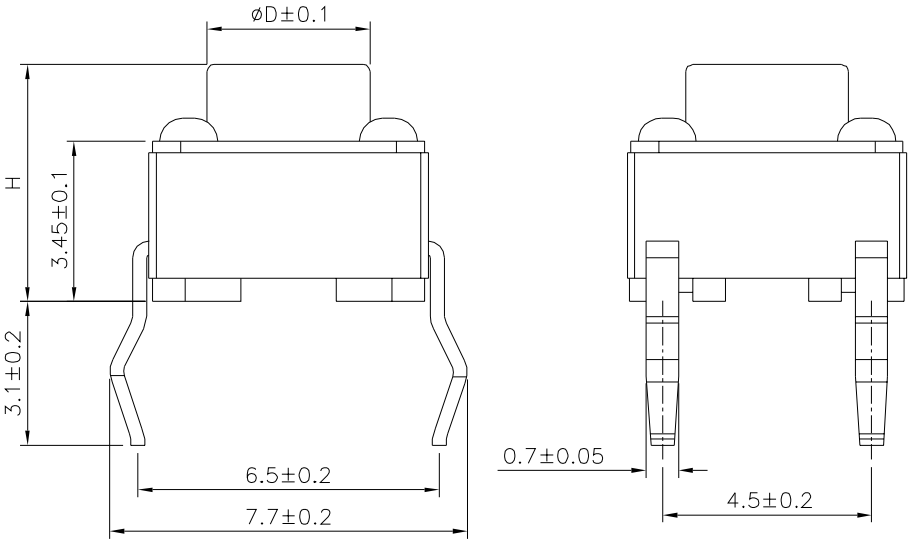

Height Position	H	D
Height 4.3mm	4.3	3.5
Height 5.0mm	5.0	3.5
Height 5.5mm	5.5	3.3
Height 6.0mm	6.0	3.3
Height 9.5mm	9.5	3.0

No.	Description	Q'ty	Material	Remark
1	Terminal	4	Brass	Silver Plated Over Nickel
2	Housing	1	PPA	Black
3	Spring	1	Copper	Silver Plated
4	Tact Switch	1	PPA	Black
5	Cover	1	Stainless Steel	Tin Plated Over Copper

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21095

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


LZX

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
0~10 ±0.10
10~20 ±0.15
20~50 ±0.20
ANG. ±3°

UNIT
mm



△ A0

NEW RELEASE

HZF

12/07/2022

NO. REV.

REVISIONS

CHK

DATE