

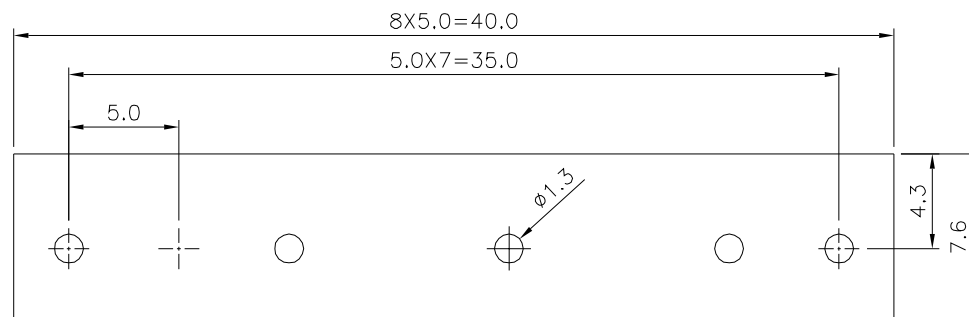
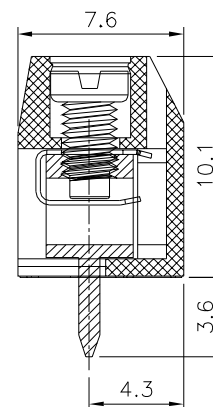


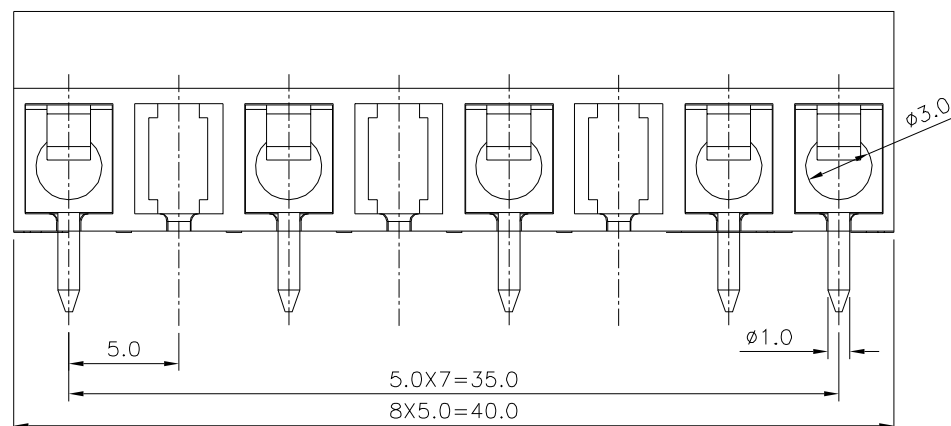

Recommended P.C.B. Layout

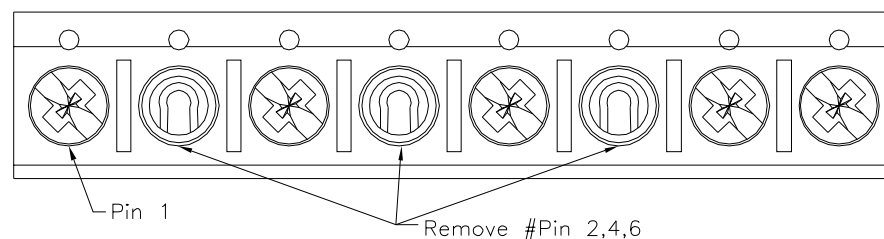

SPECIFICATION

Current Rating:15 Amps/Way Max.
Voltage Rating:250V AC
Contact Resistance:20 Milliohms Max.
Withstand Voltage:2500V AC/Minute,Test Time=60 Sec./PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Torque:4.0 Kgf.cm/M2.6
Wire Range:14~24 AWG
Terminal:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Stainless Steel
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21131

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

04/12/2017