
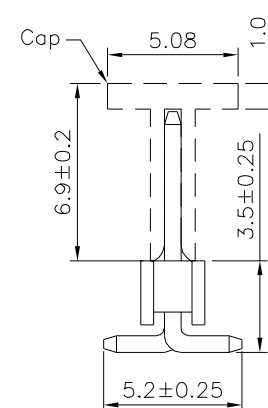
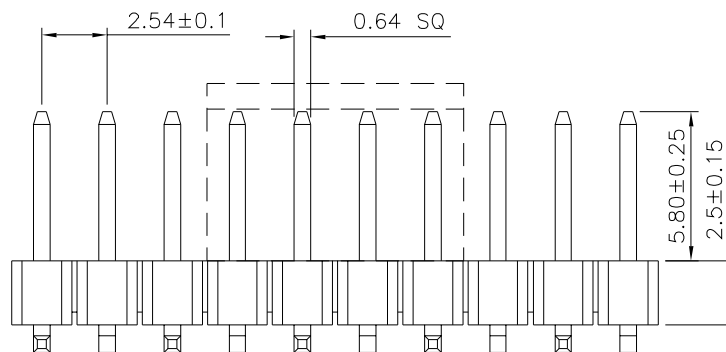


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

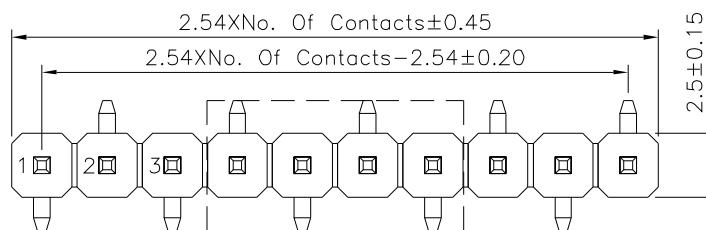

SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21169

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.25	X.* $\pm 2^{\circ}$
.X ± 0.20	.X* $\pm 1.5^{\circ}$
.XX ± 0.15	.XX* $\pm 1^{\circ}$
.XXX ± 0.10	.XXX* $\pm 0.5^{\circ}$

UNIT
 mm



NO.

REV.

A0

NEW RELEASE

REVISIONS

CHK

DATE

05/22/2017