

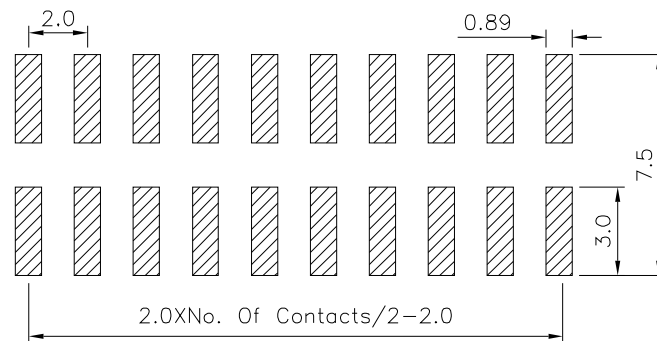



SPECIFICATION

Current Rating:1.5 Amps
 Withstanding Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

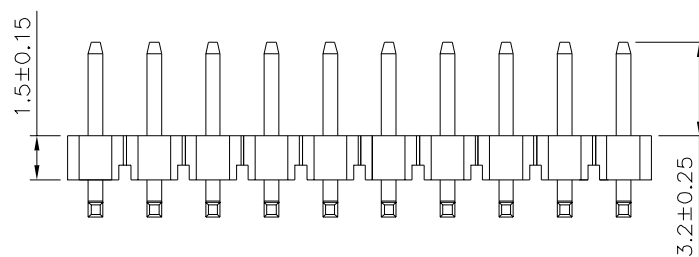

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

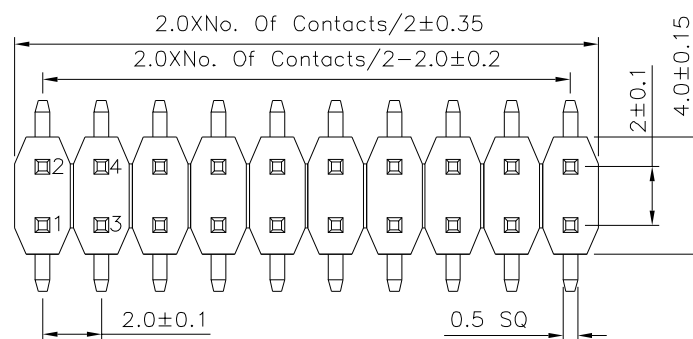

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21432

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.3 X.* ±0.5*
 .XX ±0.25 .XX* ±0.1*
 .XXX ±0.10 .XXX* ±0.05*

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

03/25/2018