
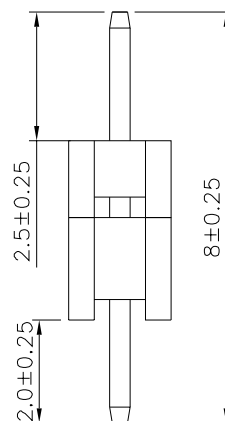
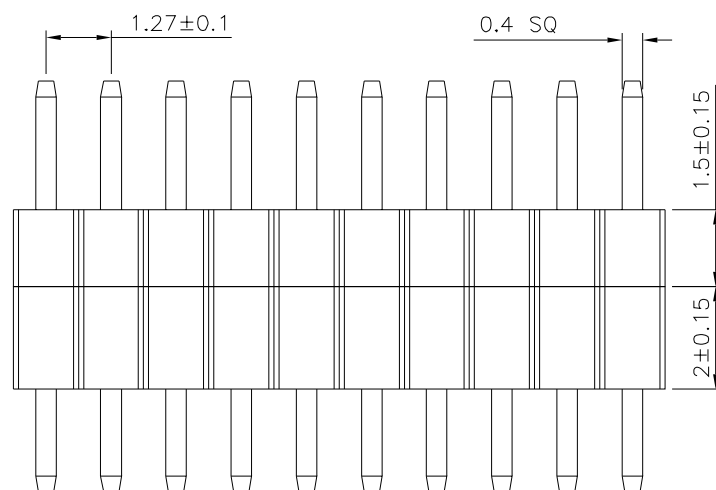


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

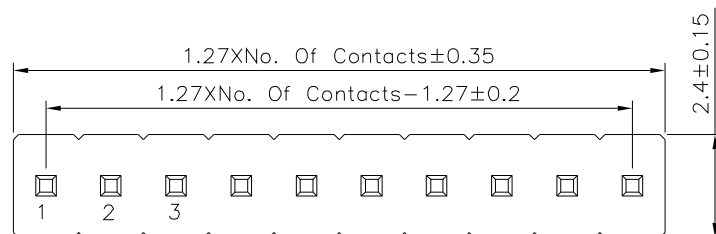

SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21463

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF

DRAWING BY

CYP


REV.

AO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
---	--

X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°

UNIT	mm
------	----



5°		AO
----	---	----

NO.	REV.
-----	------

NEW RELEASE

7.	REVISIONS
----	-----------

HZF

CHK

04/08/2018

DATE _____