
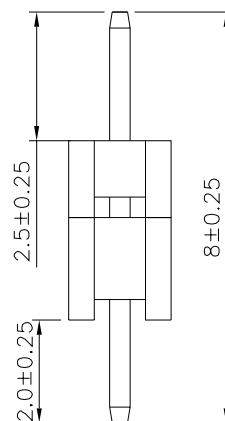
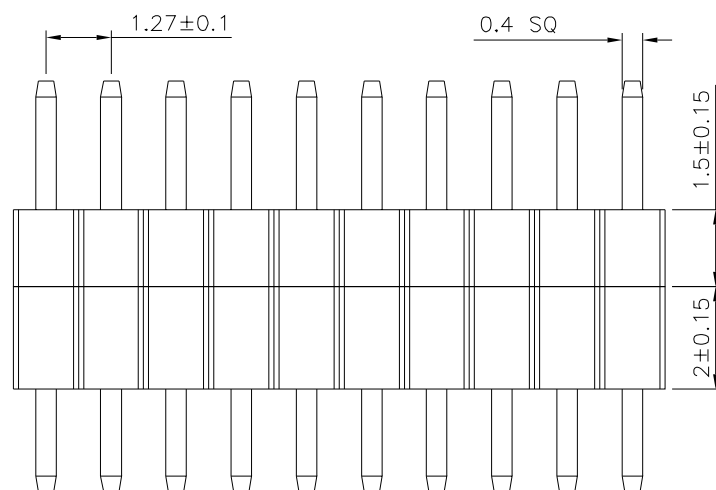


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

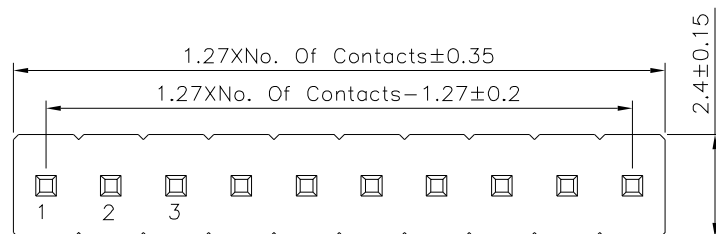

## SPECIFICATION

Current Rating:1 Amp  
Withstand Voltage:500V AC Min./Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|             |
|-------------|
| DRAWING No. |
|-------------|

21464

|       |      |
|-------|------|
| SCALE | NONE |
|-------|------|

NONE

|             |
|-------------|
| APPROVED BY |
|-------------|

MEI

|            |
|------------|
| CHECKED BY |
|------------|

HZF

DRAWING BY


CYP

|      |    |
|------|----|
| REV. | AO |
|------|----|

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|      |            |       |                   |
|------|------------|-------|-------------------|
| X.   | $\pm 0.25$ | X.*   | $\pm 2^{\circ}$   |
| .X   | $\pm 0.20$ | .X*   | $\pm 1.5^{\circ}$ |
| .XX  | $\pm 0.15$ | .XX*  | $\pm 1^{\circ}$   |
| .XXX | $\pm 0.10$ | .XXX* | $\pm 0.5^{\circ}$ |

| UNIT | mm |
|------|----|
|------|----|



|    |                                                                                       |    |
|----|---------------------------------------------------------------------------------------|----|
| 5° |  | AO |
|----|---------------------------------------------------------------------------------------|----|

|     |      |
|-----|------|
| NO. | REV. |
|-----|------|

NEW RELEASE

|    |           |
|----|-----------|
| 7. | REVISIONS |
|----|-----------|

HZF

CHK

|            |
|------------|
| 04/08/2018 |
|------------|

|  |      |
|--|------|
|  | DATE |
|--|------|