

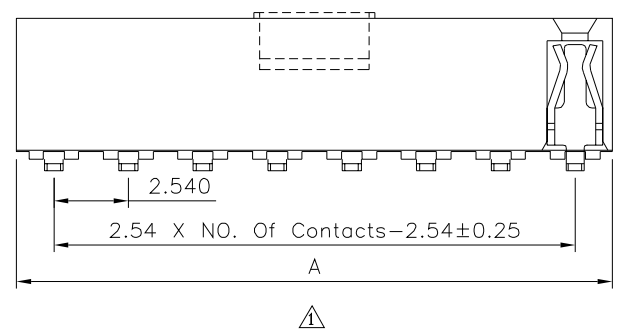
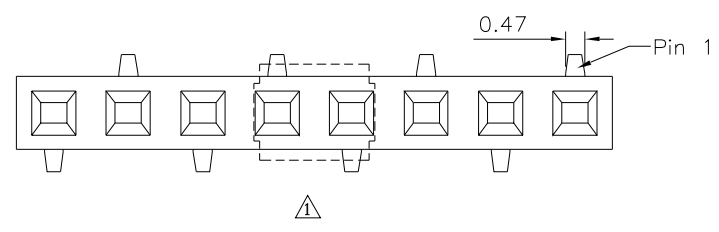


△ SPECIFICATION
 Current Rating:3 Amp
 Dielectric Withstanding:600V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

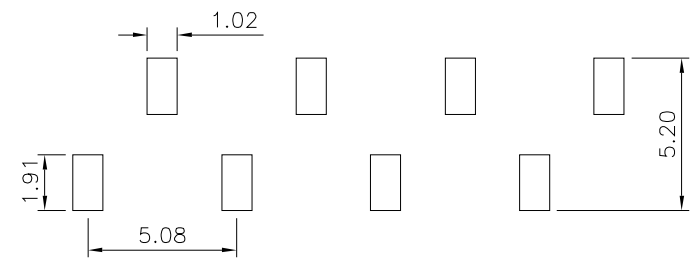

△ Pin	A	Pin	A
02	5.08	22	56.38
03	7.62	23	58.92
04	10.66	24	61.46
05	13.2	25	64.0
06	15.74	26	66.54
07	18.28	27	69.08
08	20.82	28	71.62
09	23.36	29	74.16
10	25.9	30	76.7
11	28.44	31	79.24
12	30.98	32	81.78
13	33.52	33	84.32
14	36.06	34	86.86
15	38.6	35	89.4
16	41.14	36	91.94
17	43.68	37	94.48
18	46.22	38	97.02
19	48.76	39	99.56
20	51.3	40	102.1
21	53.84		

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
21519

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.35
 .XX ±0.25
 .XXX ±0.05

SCALE NONE REV. A1 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	01/14/2019
△ A0		NEW RELEASE	HZF	08/13/2007