


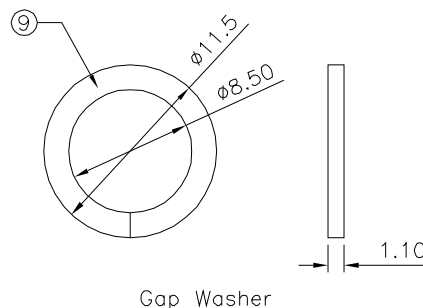
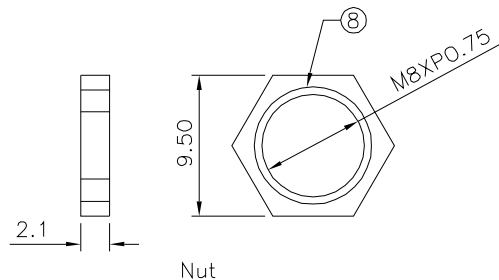


SPECIFICATION

Rating:DC 30V 0.5A
Withstand Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:100 Megaohms Min.(DC 250V)
RoHS Compliant

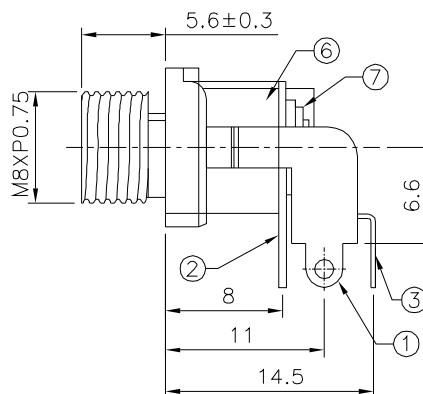

Recommended P.C.B. Layout



Pin Diameter	Item No.
Pin Ø2.0	21544
Pin Ø2.5	21993

⑨	Gap Washer	1	Steel	CuSn Plated
⑧	Nut	1	Brass	CuSn Plated
⑦	Cover	1	Bakelite	
⑥	Housing	1	PBT	Black
⑤	Fix Turn	1	Brass	CuSn Plated
④	Pin	1	Brass	CuSn Plated
③	Terminal-3#	1	Brass	CuSn Plated
②	Terminal-2#	1	Phosphor Bronze	CuSn Plated
①	Terminal-1#	1	Brass	CuSn Plated
No.	Part Name	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
21544

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
L<4 ±0.20
4<L≤16 ±0.25
16<L≤63 ±0.3
ANG. ±5°

SCALE NONE REV. A0 UNIT mm

△ A0 NEW RELEASE HZF 11/06/2022
NO. REV. REVISIONS CHK DATE