

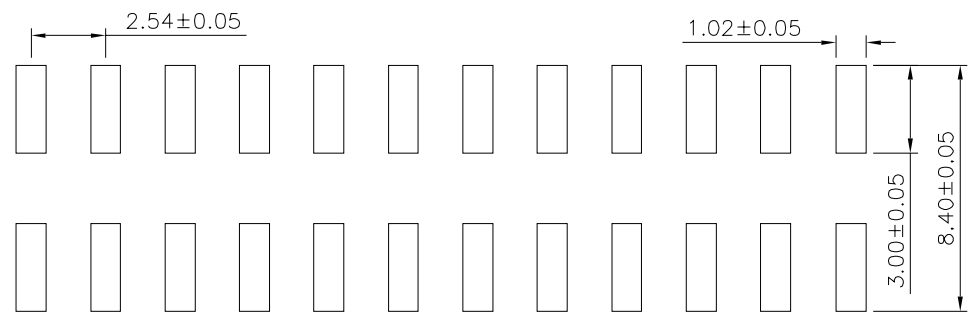
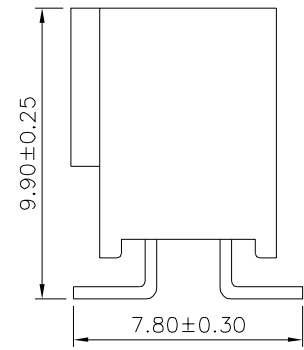


SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Plated Over Nickel
 RoHS Compliant

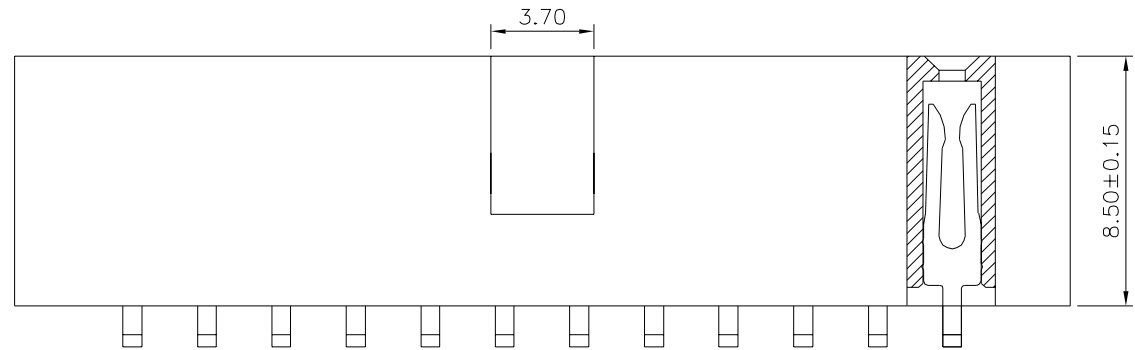

Recommended P.C.B. Layout

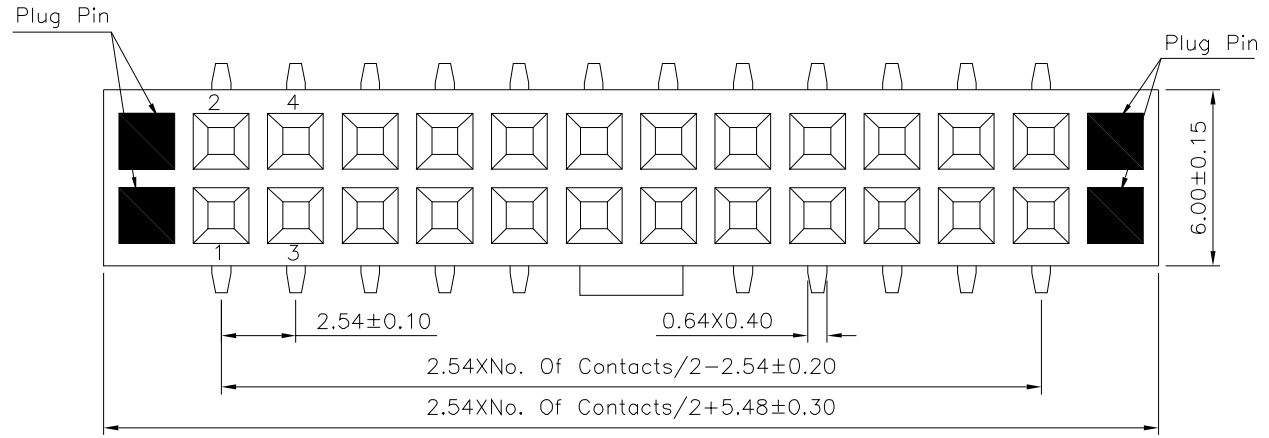

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
21554		MEI		
		CHECKED BY	HZF	
SCALE		DRAWING BY		
NONE	REV.	CYP	A0	
		UNIT		
		mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	02/02/2018