

SPECIFICATION

1.General Characteristics

3.0mm Micro-Fit 2XXX Female Housing
Black Insulator

2.Material&Finish

Insulator:PA66 UL94V-2,Black







3.Electrical Characteristics

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.

4.Environmental Characteristics

Temperature Range:-25°C~+85°C

5.RoHS Compliant

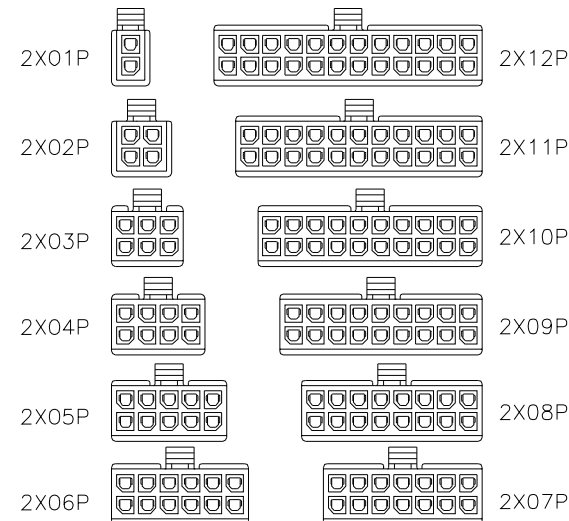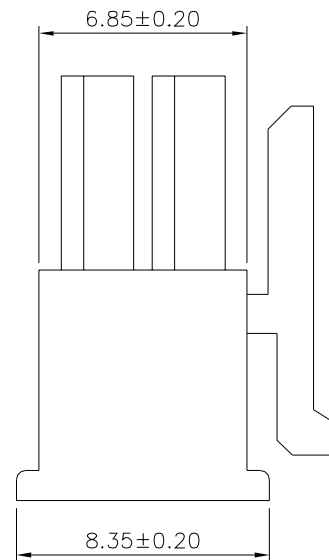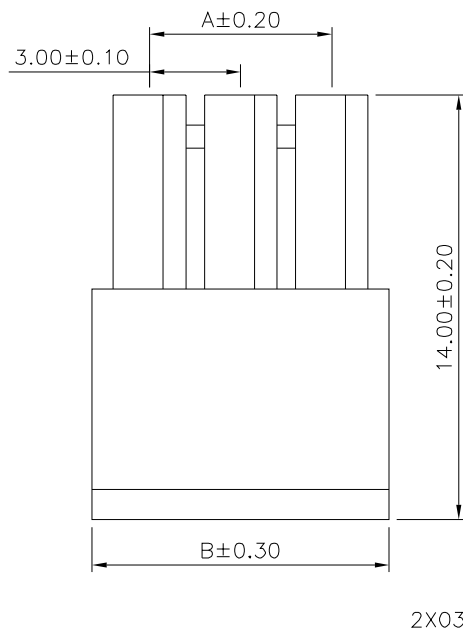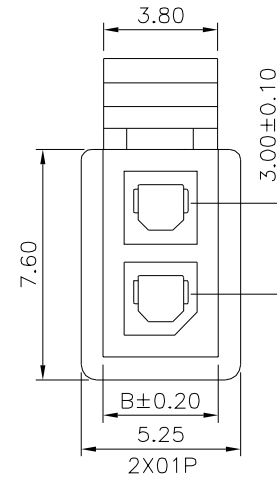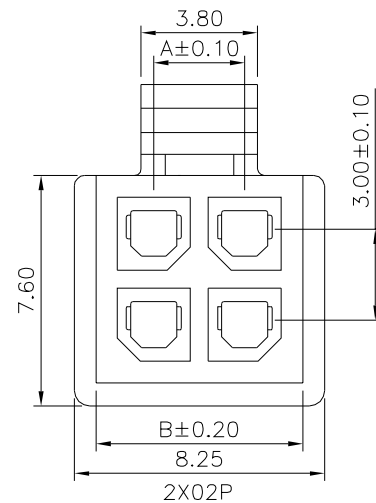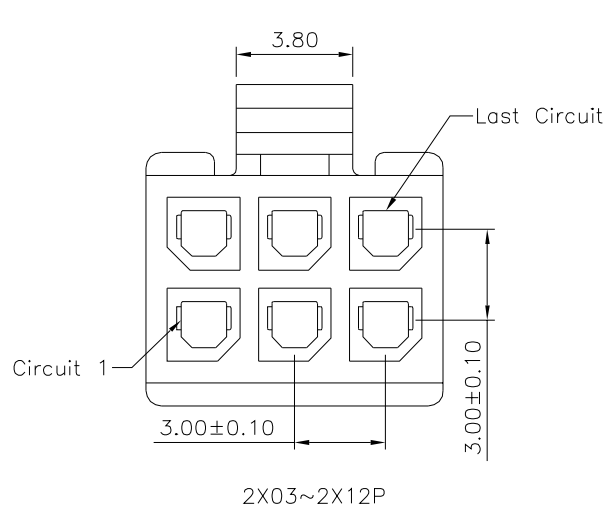

Pin	A	B
02	3.85	
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21604

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.05
ANG. ±1°



BO

NEW RELEASE

HZF

02/17/2016

SCALE

NONE

REV.

BO

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE