
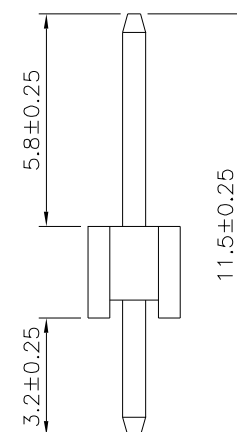
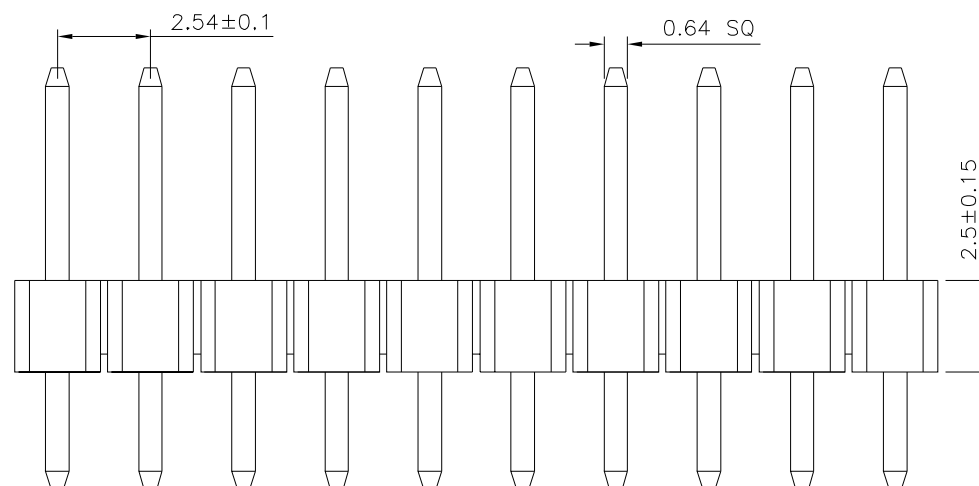


SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

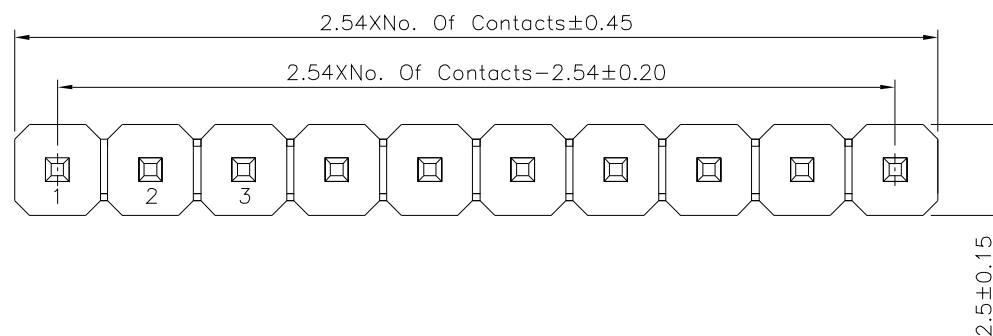

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21792

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^{\circ}$
.X	± 0.20	.X*	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX*	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX*	$\pm 0.5^{\circ}$

UNIT	mm
------	----



5°		AO
	NO.	REV

NEW RELEASE
REVISIONS

HZF
CHK

09/02/2016
DATE