
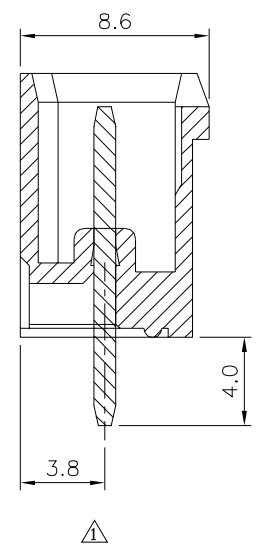
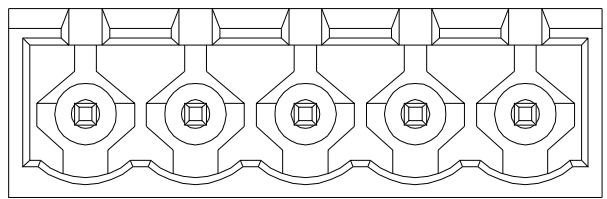


Recommended P.C.B. Layout

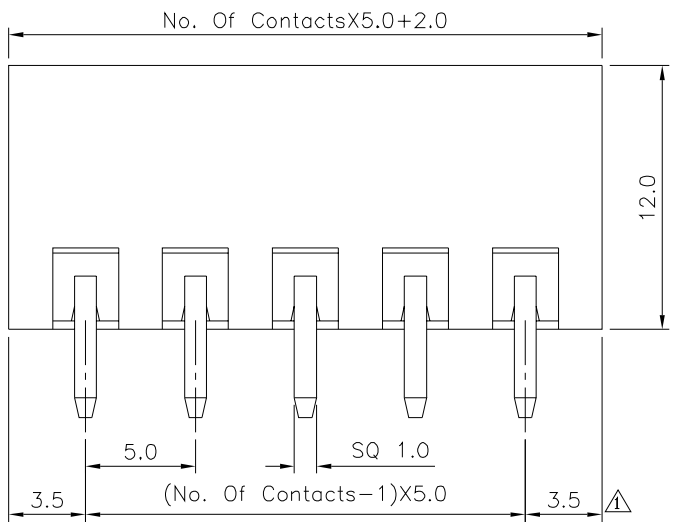

△ SPECIFICATION
Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Operation Temperature:-40°C~+105°C
Soldering Reliability:+250°C,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.  21832		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X°. ±1°							
		EMILY									
		CHECKED BY									
		HZF									
SCALE		NONE		DRAWING BY			NO.	REV.	REVISIONS	CHK	DATE
				HAO							
		REV.		A2							
5		6		7		8		9		0	