


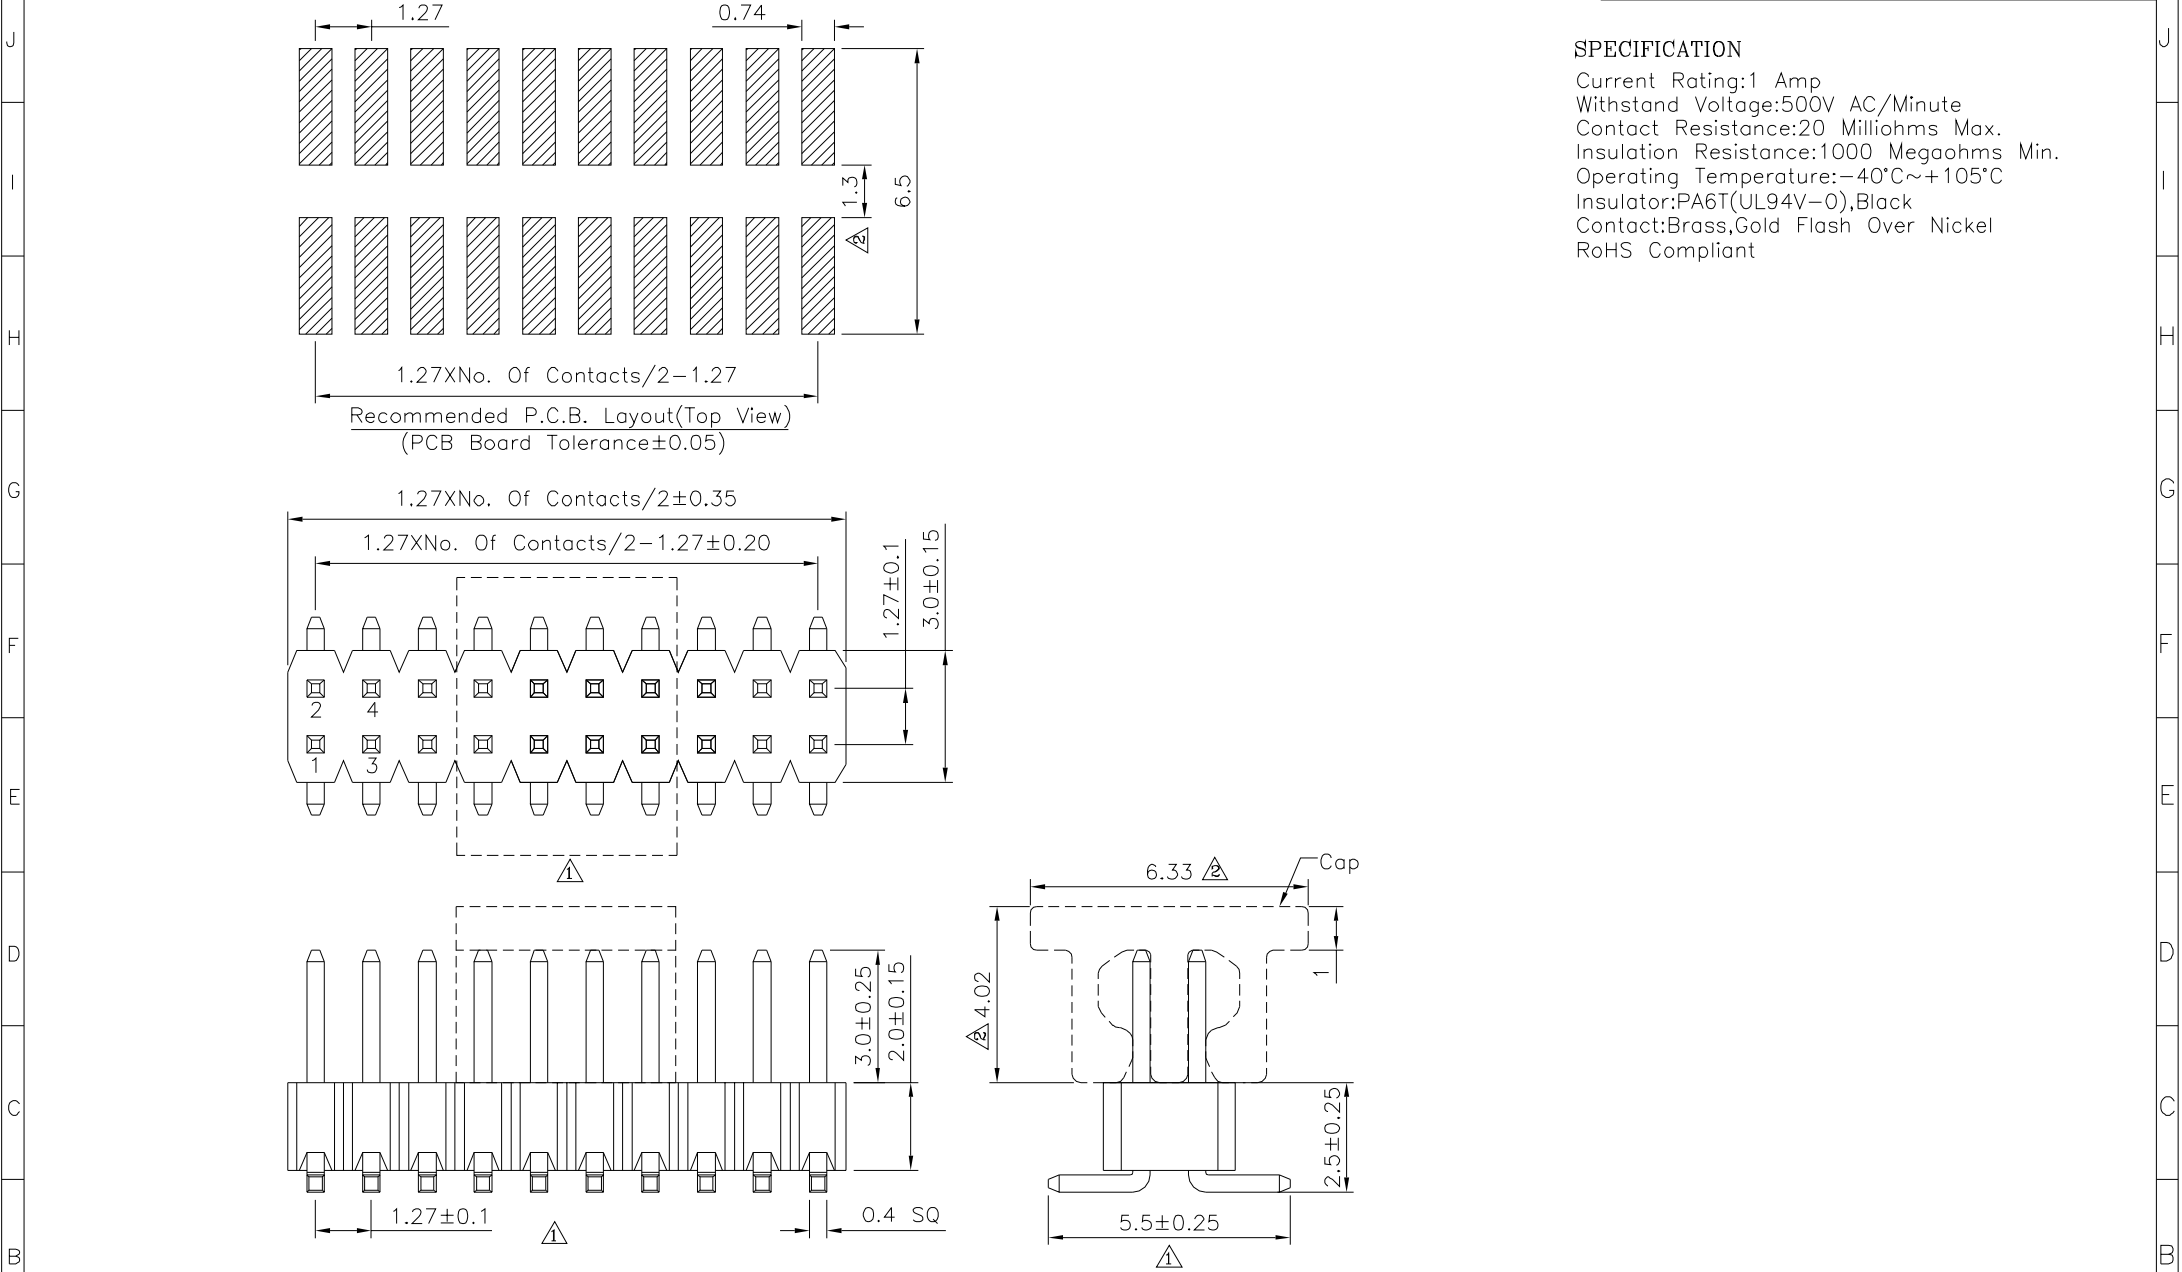

SPECIFICATION

Current Rating:1 Amp

Withstand Voltage:500V AC/Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operating Temperature:-40°C~+105°C

Insulator:PA6T(UL94V-0),Black

Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X." ±2" .X ±0.20 .X" ±1.5" .XX ±0.15 .XX" ±1" .XXX ±0.10 .XXX" ±0.5"							
21927		MEI									
		CHECKED BY									
		HZF									
		DRAWING BY		CYP							
SCALE	NONE	REV.	A2	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE	