

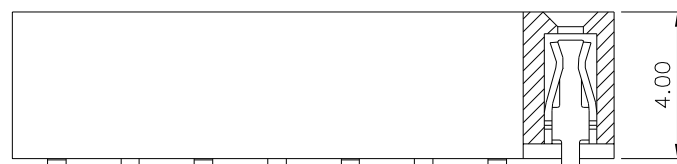


Recommended P.C.B. Layout
Standard Layout

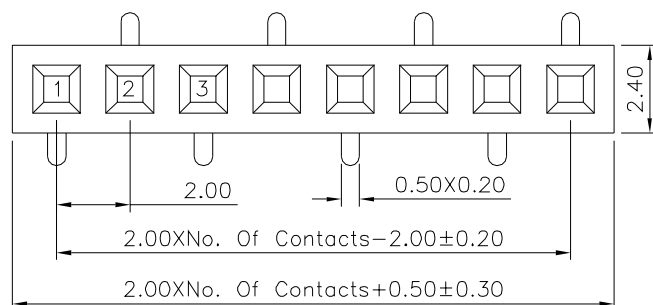

SPECIFICATION

Current Rating:2.0 Amps/Contact Max.
Contact Resistance:20 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Withstand Voltage:450V AC/Minute
Operating Temperature:-55°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21941

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.50
.X	± 0.30
.XX	± 0.20
.XXX	± 0.10
ANG.	$\pm 5^\circ$

UNIT	mm
------	----



	AO
NO.REV.	

	NEW RELEASE
--	-------------

REVISIONS

HZF

09/18/2014

CHK

DATE _____