

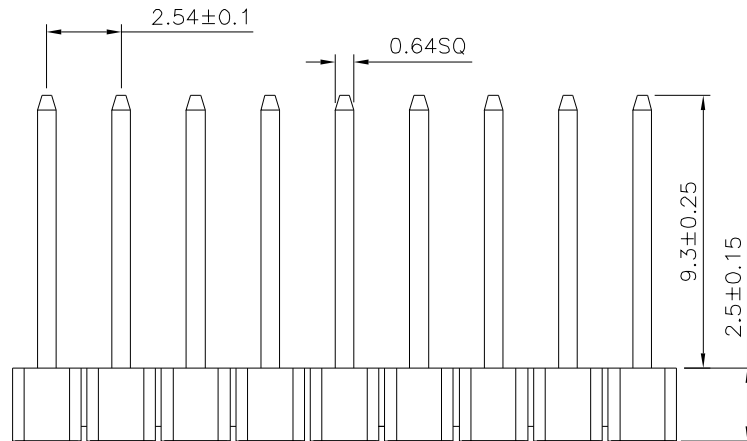


SPECIFICATION
 Current Rating: 3 Amps
 Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PA6T (UL94V-0), Black
 RoHS Compliant

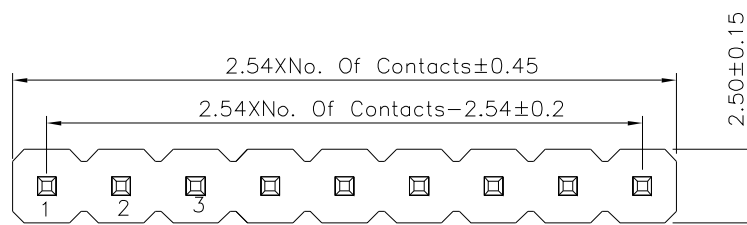

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21973

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^{\circ}$
.X	± 0.20	.X*	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX*	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX*	$\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

09/24/2020