File No.	555LI10806	SHEET	1/1

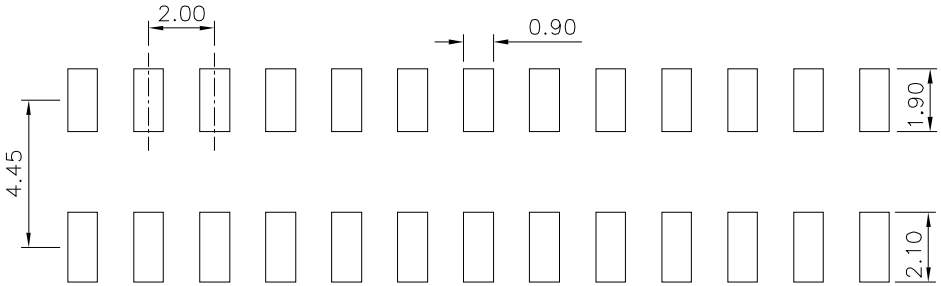

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

SPECIFICATION

Current Rating:2 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Housing:PA6T+30%G.F.(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

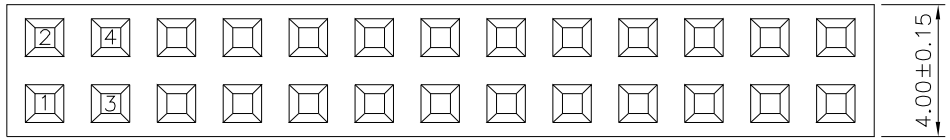

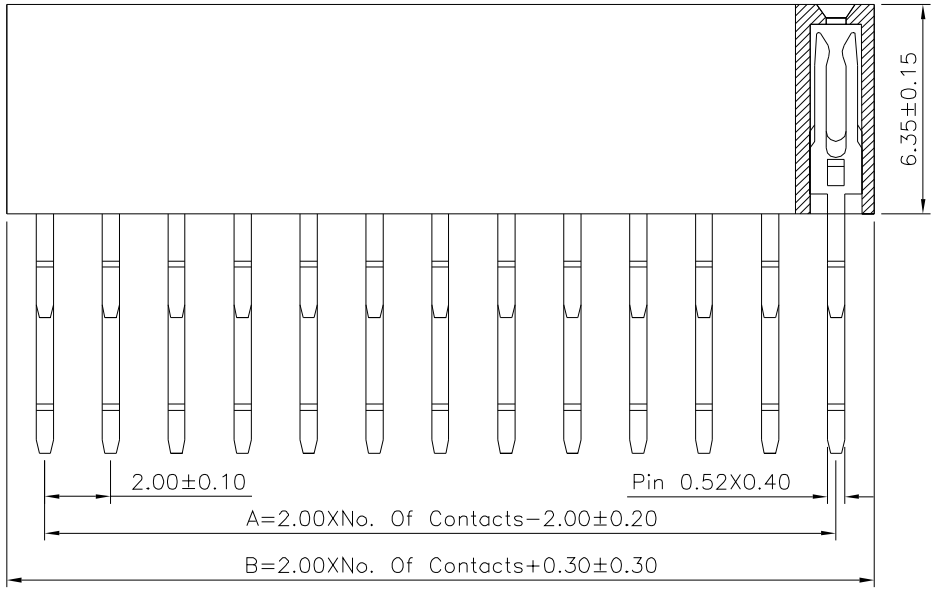

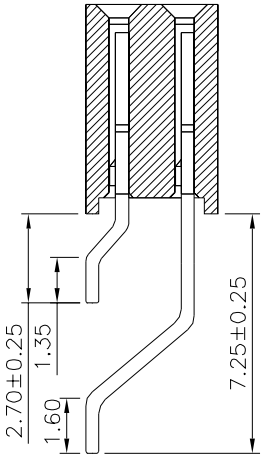

Pin	A	B	Pin	A	B
02	2.00	4.30	22	42.00	44.30
03	4.00	6.30	23	44.00	46.30
04	6.00	8.30	24	46.00	48.30
05	8.00	10.30	25	48.00	50.30
06	10.00	12.30	26	50.00	52.30
07	12.00	14.30	27	52.00	54.30
08	14.00	16.30	28	54.00	56.30
09	16.00	18.30	29	56.00	58.30
10	18.00	20.30	30	58.00	60.30
11	20.00	22.30	31	60.00	62.30
12	22.00	24.30	32	62.00	64.30
13	24.00	26.30	33	64.00	66.30
14	26.00	28.30	34	66.00	68.30
15	28.00	30.30	35	68.00	70.30
16	30.00	32.30	36	70.00	72.30
17	32.00	34.30	37	72.00	74.30
18	34.00	36.30	38	74.00	76.30
19	36.00	38.30	39	76.00	78.30
20	38.00	40.30	40	78.00	80.30
21	40.00	42.30			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
22183	CHECKED BY HZF	.X ±0.30				
	DRAWING BY CYP	.XX ±0.20				
		ANG.				
SCALE NONE	REV. A0	UNIT mm	0	A0	NEW RELEASE	HZF 03/27/2016
			NO.	REV.	REVISIONS	CHK DATE