




Recommended P.C.B. Layout



1X2P~1X36P




1X37P, 1X38P, 1X39P




1X40P

SPECIFICATION


Current:3A
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

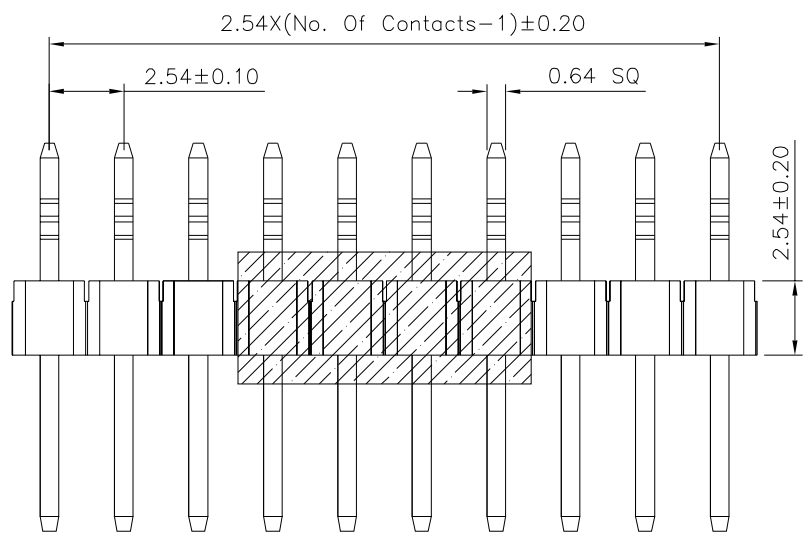

△

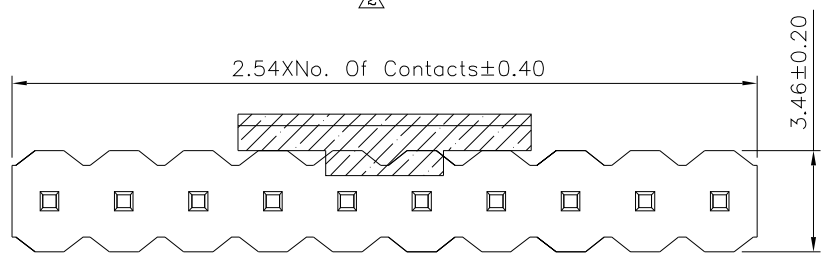

△

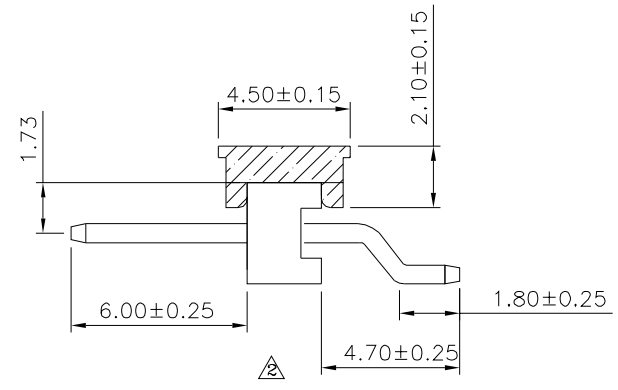

△

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

22247

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △.X ±0.38
 .XX ±0.25
 .XXX ±0.05


NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	11/01/2019
△1	A1	Modify Data	HZF	08/28/2014
△0	A0	NEW RELEASE	HZF	04/09/2012

SCALE NONE

REV. A2

UNIT mm

UNIT mm



NO. REV.

REVISIONS

CHK

DATE