

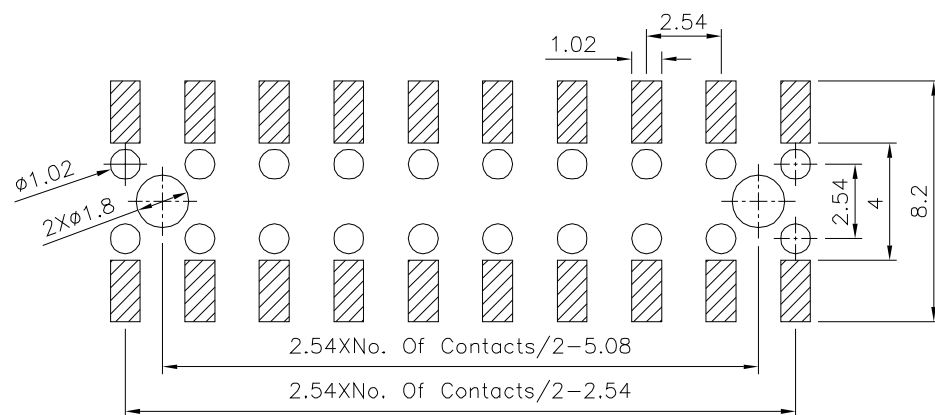
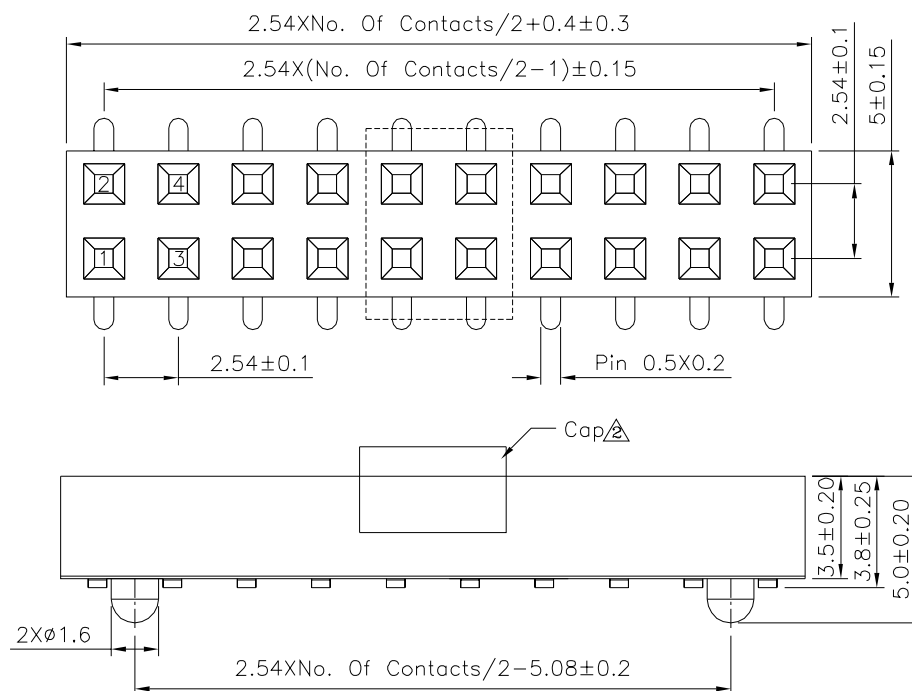


# SPECIFICATION

Current Rating:3A  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-O),Black  
 Contact:Phosphor Bronze,Gold Flash Over Nickel  
 RoHS Compliant



Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance±0.05)

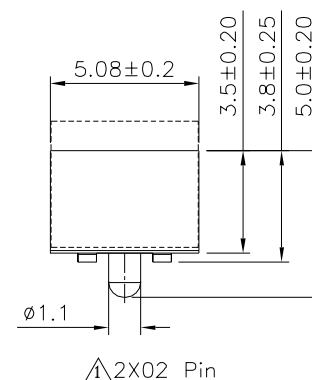

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

22264

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

X. ±0.25 X. ±2"  
 .X ±0.20 .X ±1.5"  
 .XX ±0.15 .XX ±1"  
 .XXX ±0.10 .XXX ±0.5"

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 2   | A2   | Modify Data | HZF | 04/14/2021 |
| 1   | A1   | Modify Data | HZF | 08/26/2015 |
| 0   | A0   | NEW RELEASE | HZF | 07/02/2014 |