

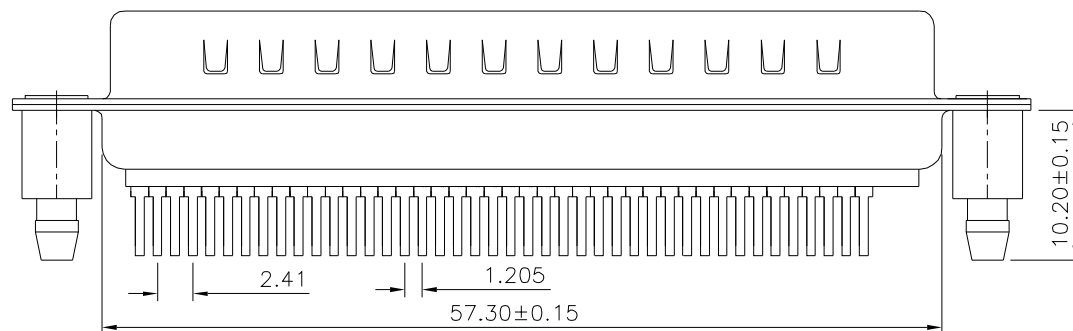


SPECIFICATION

Current Rating:5 Amps
Withstand Voltage:500V For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Operation Temperature:-55°C~+105°C
Insulator:PBT+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
Harpoon:Brass,Tin Plated
RoHS Compliant

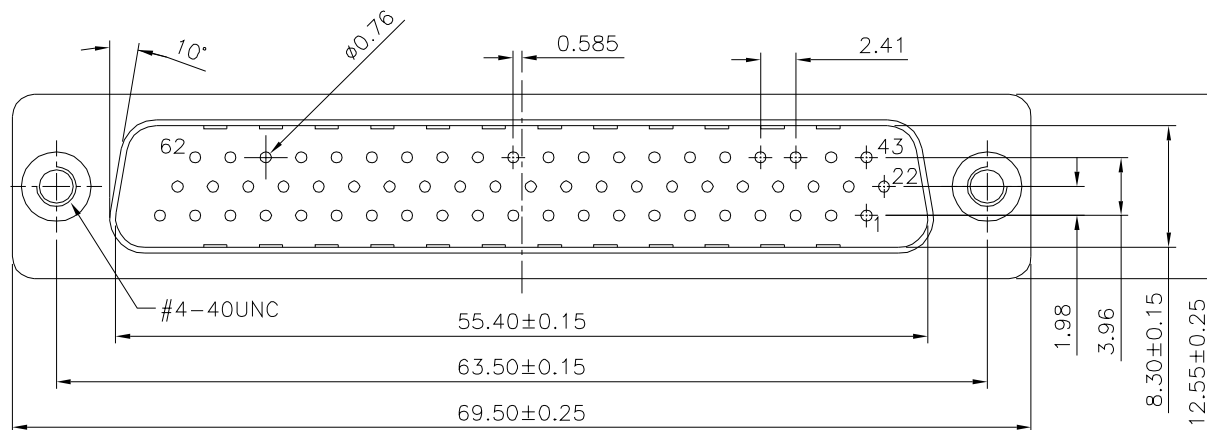

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22317

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

LZX


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	±0.38	.X"	±3"
.XX	±0.25	.XX"	±1"
.XXX	±0.05	.XXX"	±0.5"

UNIT



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

10/22/2021