


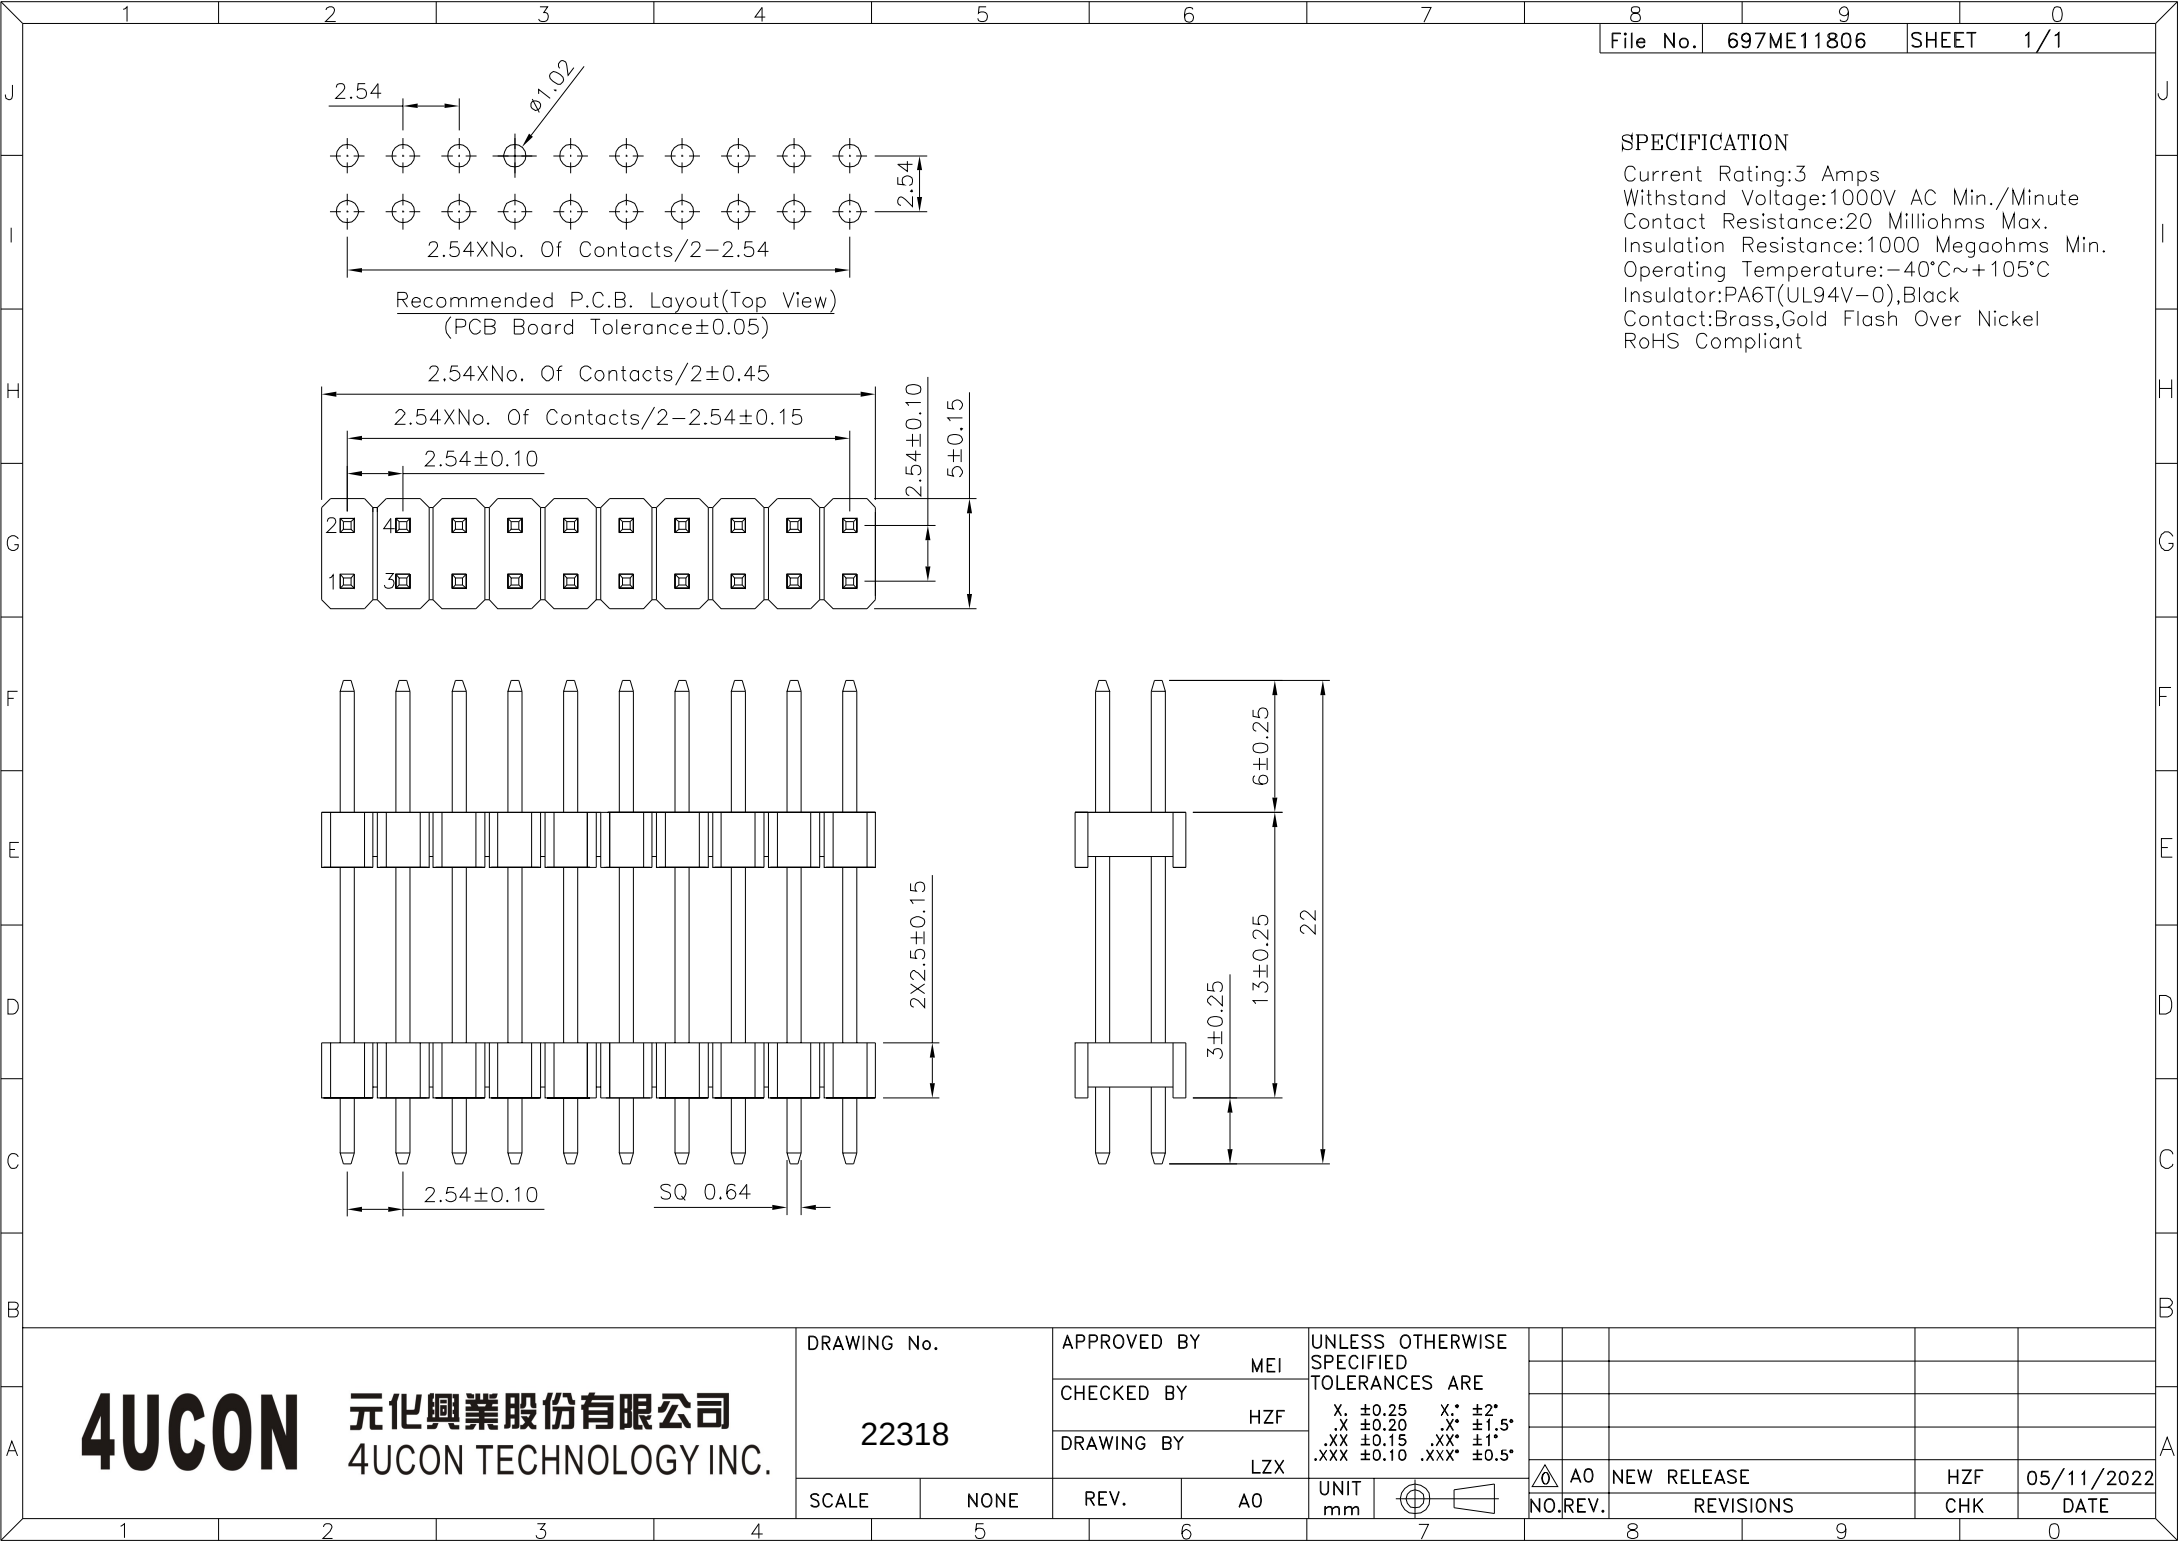

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
22318

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	05/11/2022