


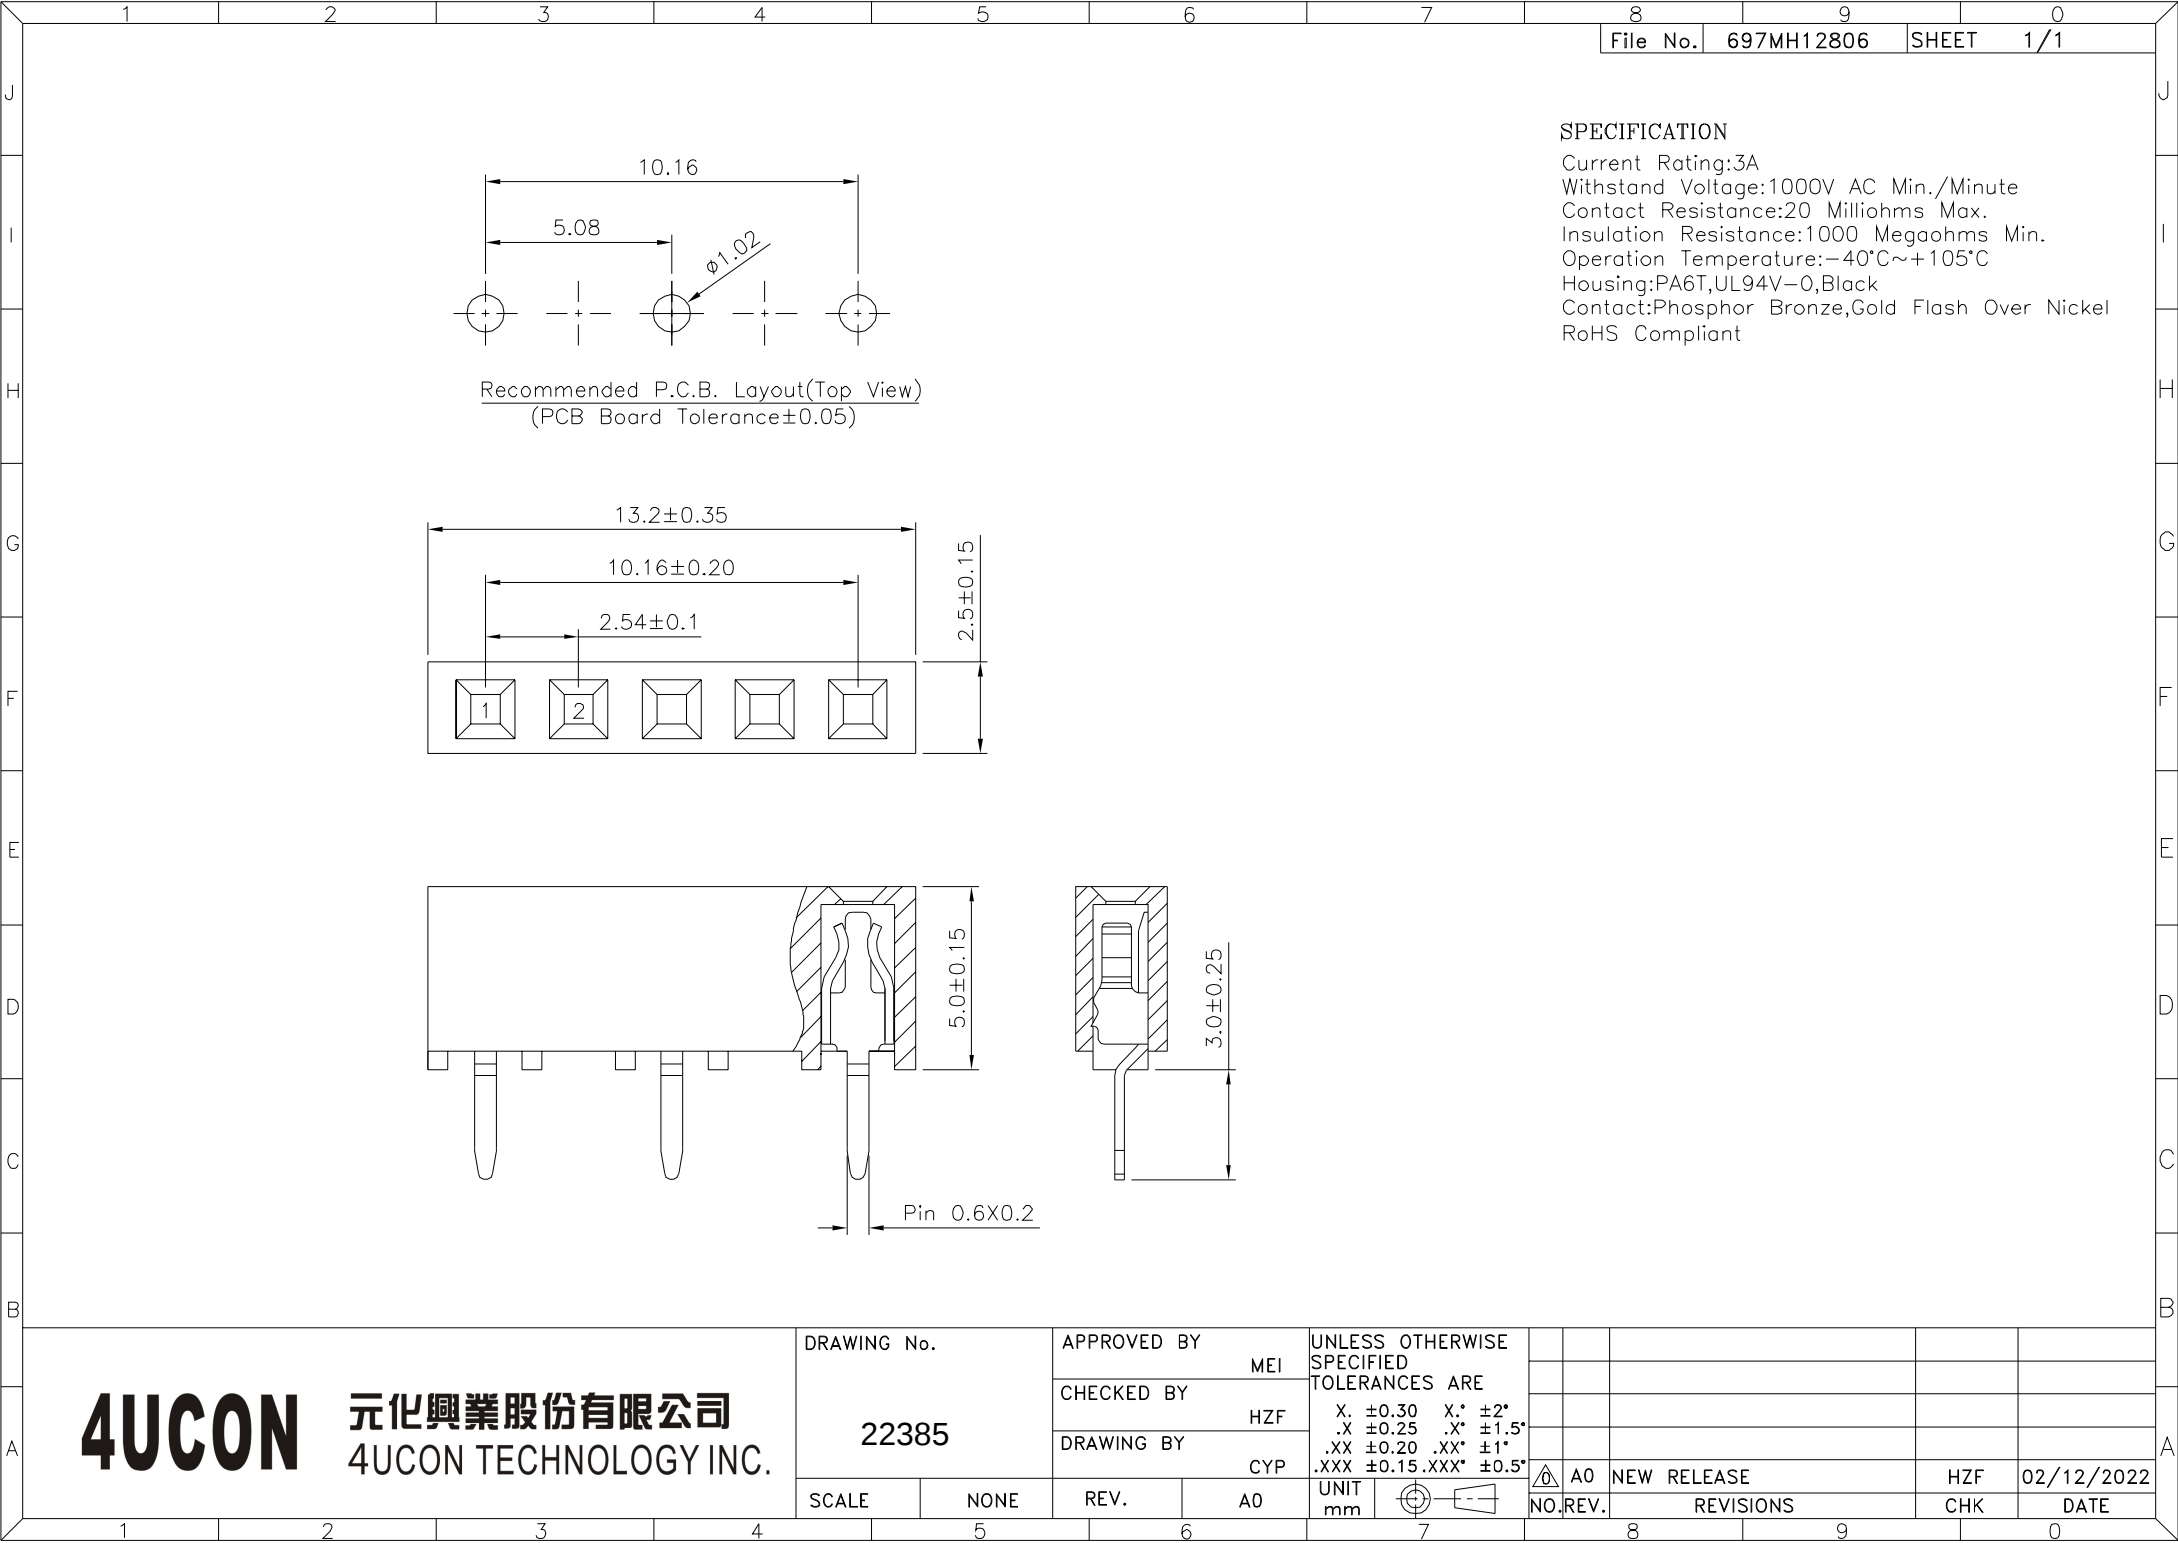

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T,UL94V-0,Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

DRAWING No. 22385		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±2* .X ±0.25 .X* ±1.5* .XX ±0.20 .XX* ±1* .XXX ±0.15 .XXX* ±0.5*						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY								
		CYP								
							A0	NEW RELEASE	HZF	02/12/2022
SCALE	NONE	REV.	A0	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE