

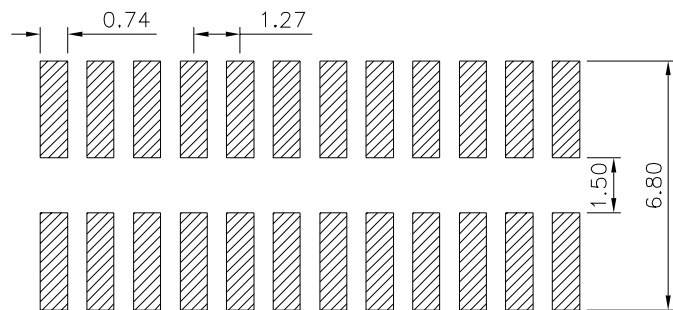
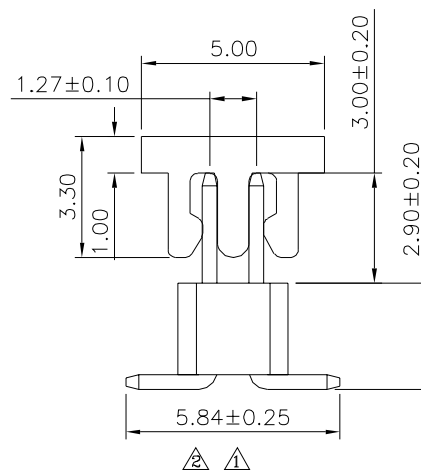


SPECIFICATION

Current Rating:1 Amp
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

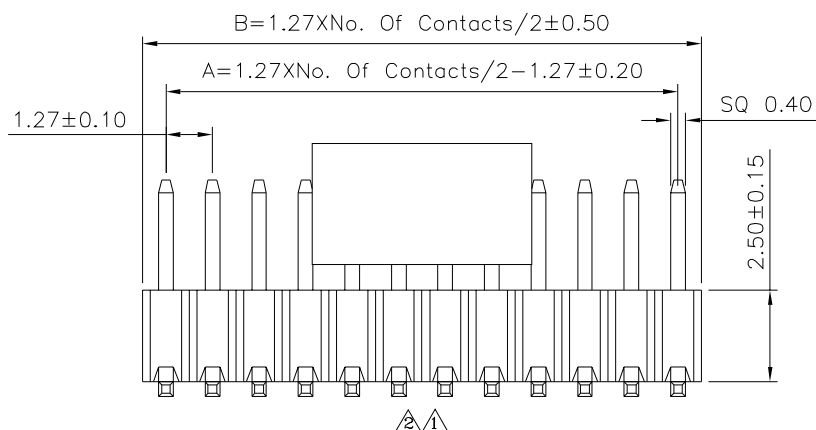

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

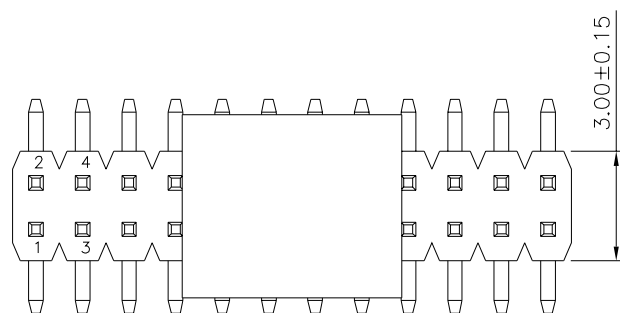

Pin	A	B	Pin	A	B
06	2.54	3.81	54	33.02	34.29
08	3.81	5.08	56	34.29	35.56
10	5.08	6.35	58	35.56	36.83
12	6.35	7.62	60	36.83	38.10
14	7.62	8.89	62	38.10	39.37
16	8.89	10.16	64	39.37	40.64
18	10.16	11.43	66	40.64	41.91
20	11.43	12.70	68	41.91	43.18
22	12.70	13.97	70	43.18	44.45
24	13.97	15.24	72	44.45	45.72
26	15.24	16.51	74	45.72	46.99
28	16.51	17.78	76	46.99	48.26
30	17.78	19.05	78	48.26	49.53
32	19.05	20.32	80	49.53	50.80
34	20.32	21.59	82	50.80	52.07
36	21.59	22.86	84	52.07	53.34
38	22.86	24.13	86	53.34	54.61
40	24.13	25.40	88	54.61	55.88
42	25.40	26.67	90	55.88	57.15
44	26.67	27.94	92	57.15	58.42
46	27.94	29.21	94	58.42	59.69
48	29.21	30.48	96	59.69	60.96
50	30.48	31.75	98	60.96	62.23
52	31.75	33.02	100	62.23	63.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
22427

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20

SCALE NONE

REV. A2

UNIT mm

NO. REV. A2 Modify Data HZF 07/12/2021
A1 Modify Data HZF 03/17/2018
A0 NEW RELEASE HZF 05/23/2016

REVISIONS CHK DATE