

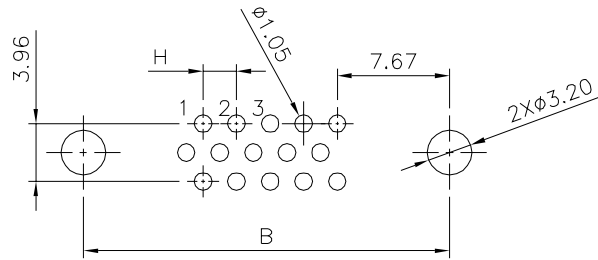
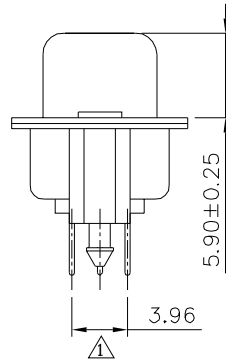


SPECIFICATION


Current Rating: 1A Max
 Dielectric Withstanding Voltage: 500V AC
 For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At DC 500V
 Temperature Range: -55°C ~ +105°C
 RoHS Compliant

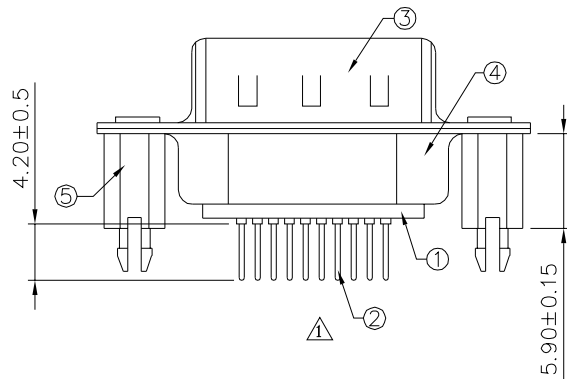


Recommended P.C.B. Layout
15 Pin

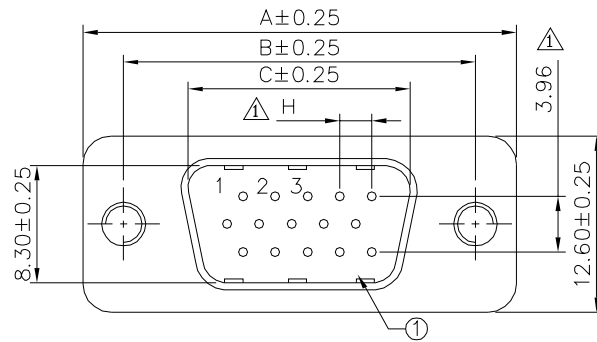


5	Boardlock Nut	2	Brass	Nickel Plated (H4.75*11.5)
4	Back-Shell	1	Cold Rolled Steel	Tin Plated
3	Front-Shell	1	Cold Rolled Steel	Tin Plated
2	Contact	15~62	Brass	Gold Plated Over Nickel
1	Housing	1	PBT,UL94V-0	White
No.	Name	Q'ty	Material	Remark

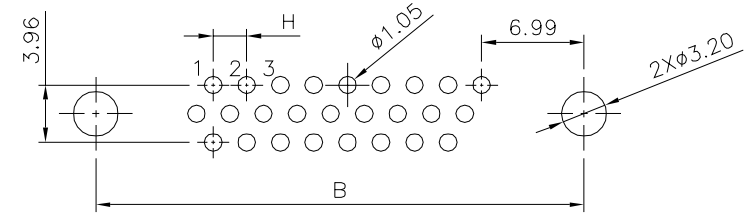

Recommended P.C.B. Layout
26 Pin

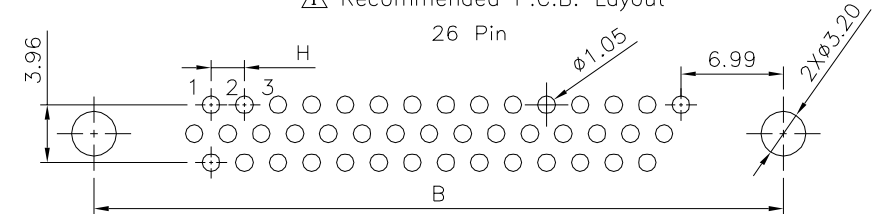

Recommended P.C.B. Layout
44 Pin

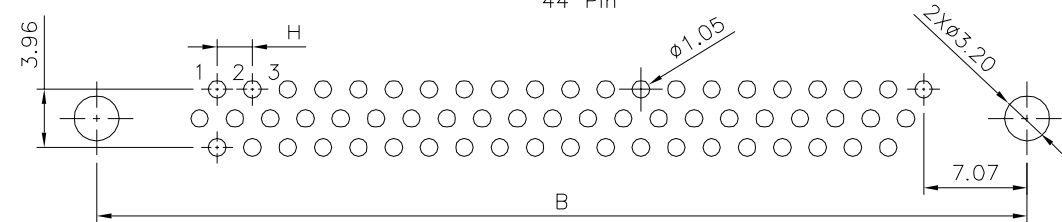

Recommended P.C.B. Layout
62 Pin

Pin	A	B	C	H
15	30.80	25.00	16.92	2.29
26	39.20	33.32	25.25	2.29
44	53.05	47.04	38.96	2.29
62	69.40	63.50	55.42	2.41

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22432

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


HAO

REV.

B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°

UNIT mm



	B2	Modify Data	HZF	04/14/2015
	B1	Modify Data	HZF	08/19/2011
	B0	NEW RELEASE	HZF	11/13/2008
NO.REV.	REVISIONS		CHK	DATE