




SPECIFICATION

Current Rating: 3 Amp/Contact Max.  
Operation Voltage: 60V AC/DC  
Contact Resistance: 4 Milliohms/Contacts Max.  
Insulation Resistance: 1000 Megaohms Min. At 100V  
⚠ Withstanding Voltage: 500V AC/Minute  
Housing: PPS(UL94V-0), Black  
Pin(Out Sleeve): Brass, Tin Plated Over Nickel  
Clip(Contact 6 Finger): Beryllium Copper  
Gold Flash Over Nickel  
Durability: 200 Cycles Min.  
⚠ Average Insertion Force With Steel  
Pin Of  $\varnothing 0.66\text{mm}$ : <250g  
Average Withdrawal Force With Steel  
Pin Of  $\varnothing 0.66\text{mm}$ : >25g Min.  
Operation Temperature: Gold Plated: -55°C To +105°C  
Tin Plated: -40°C To +105°C  
RoHS Compliant

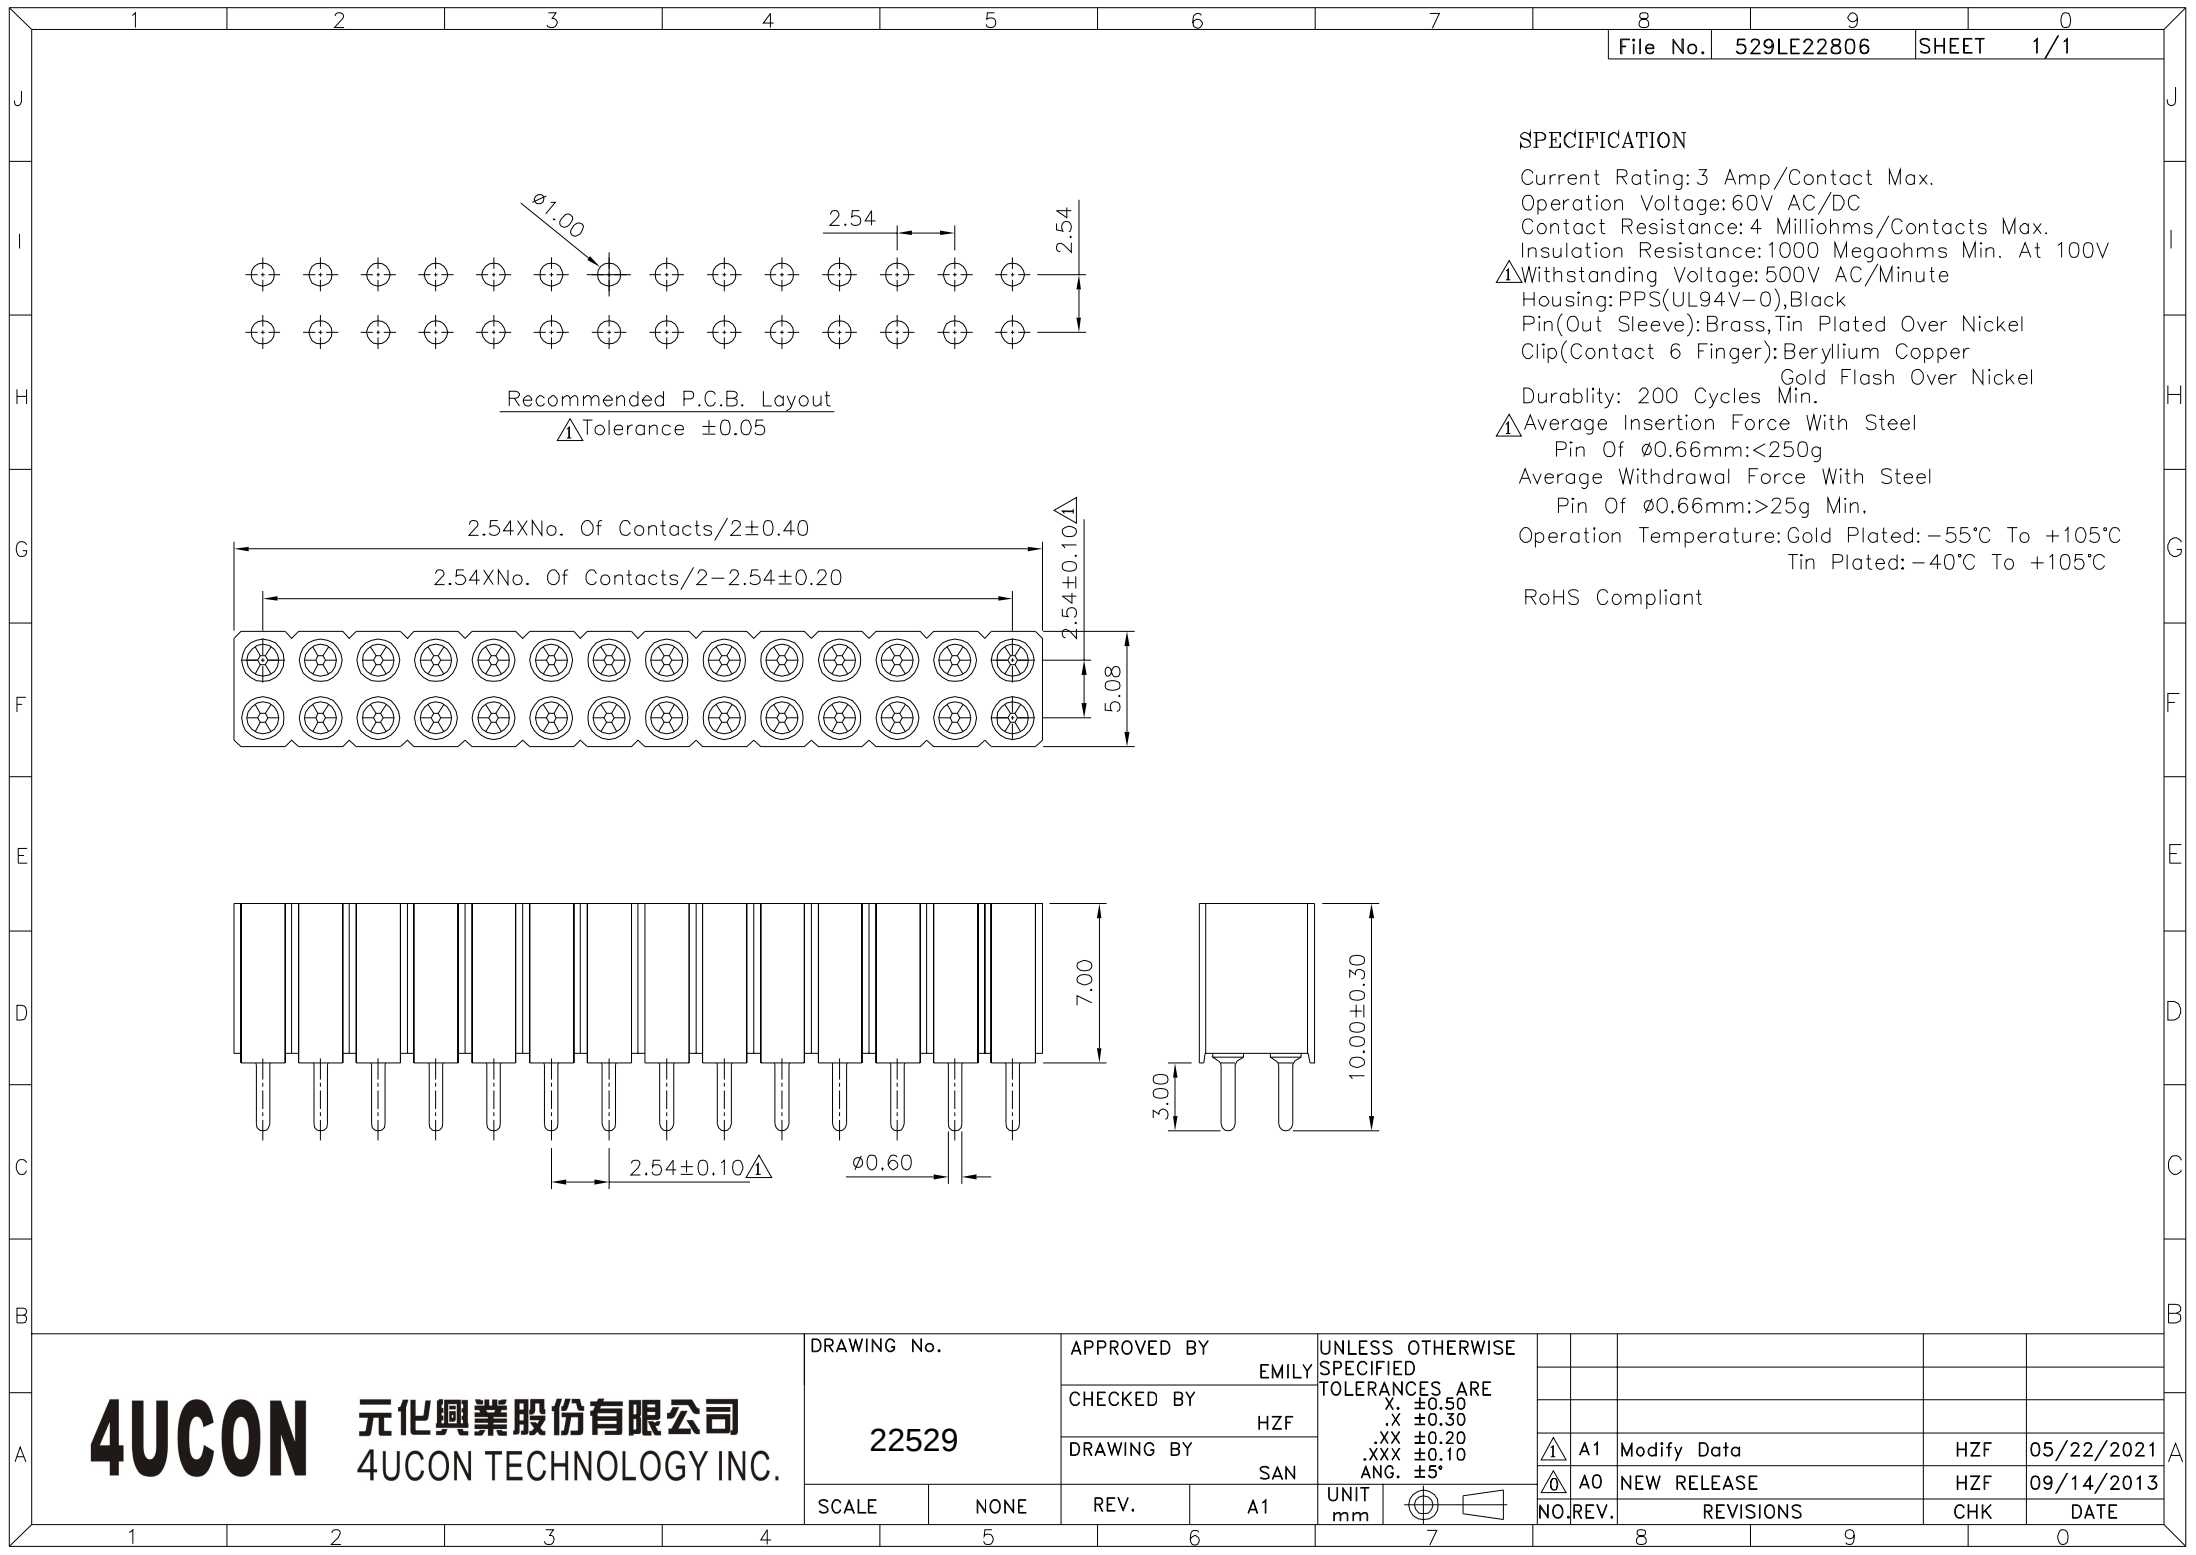