


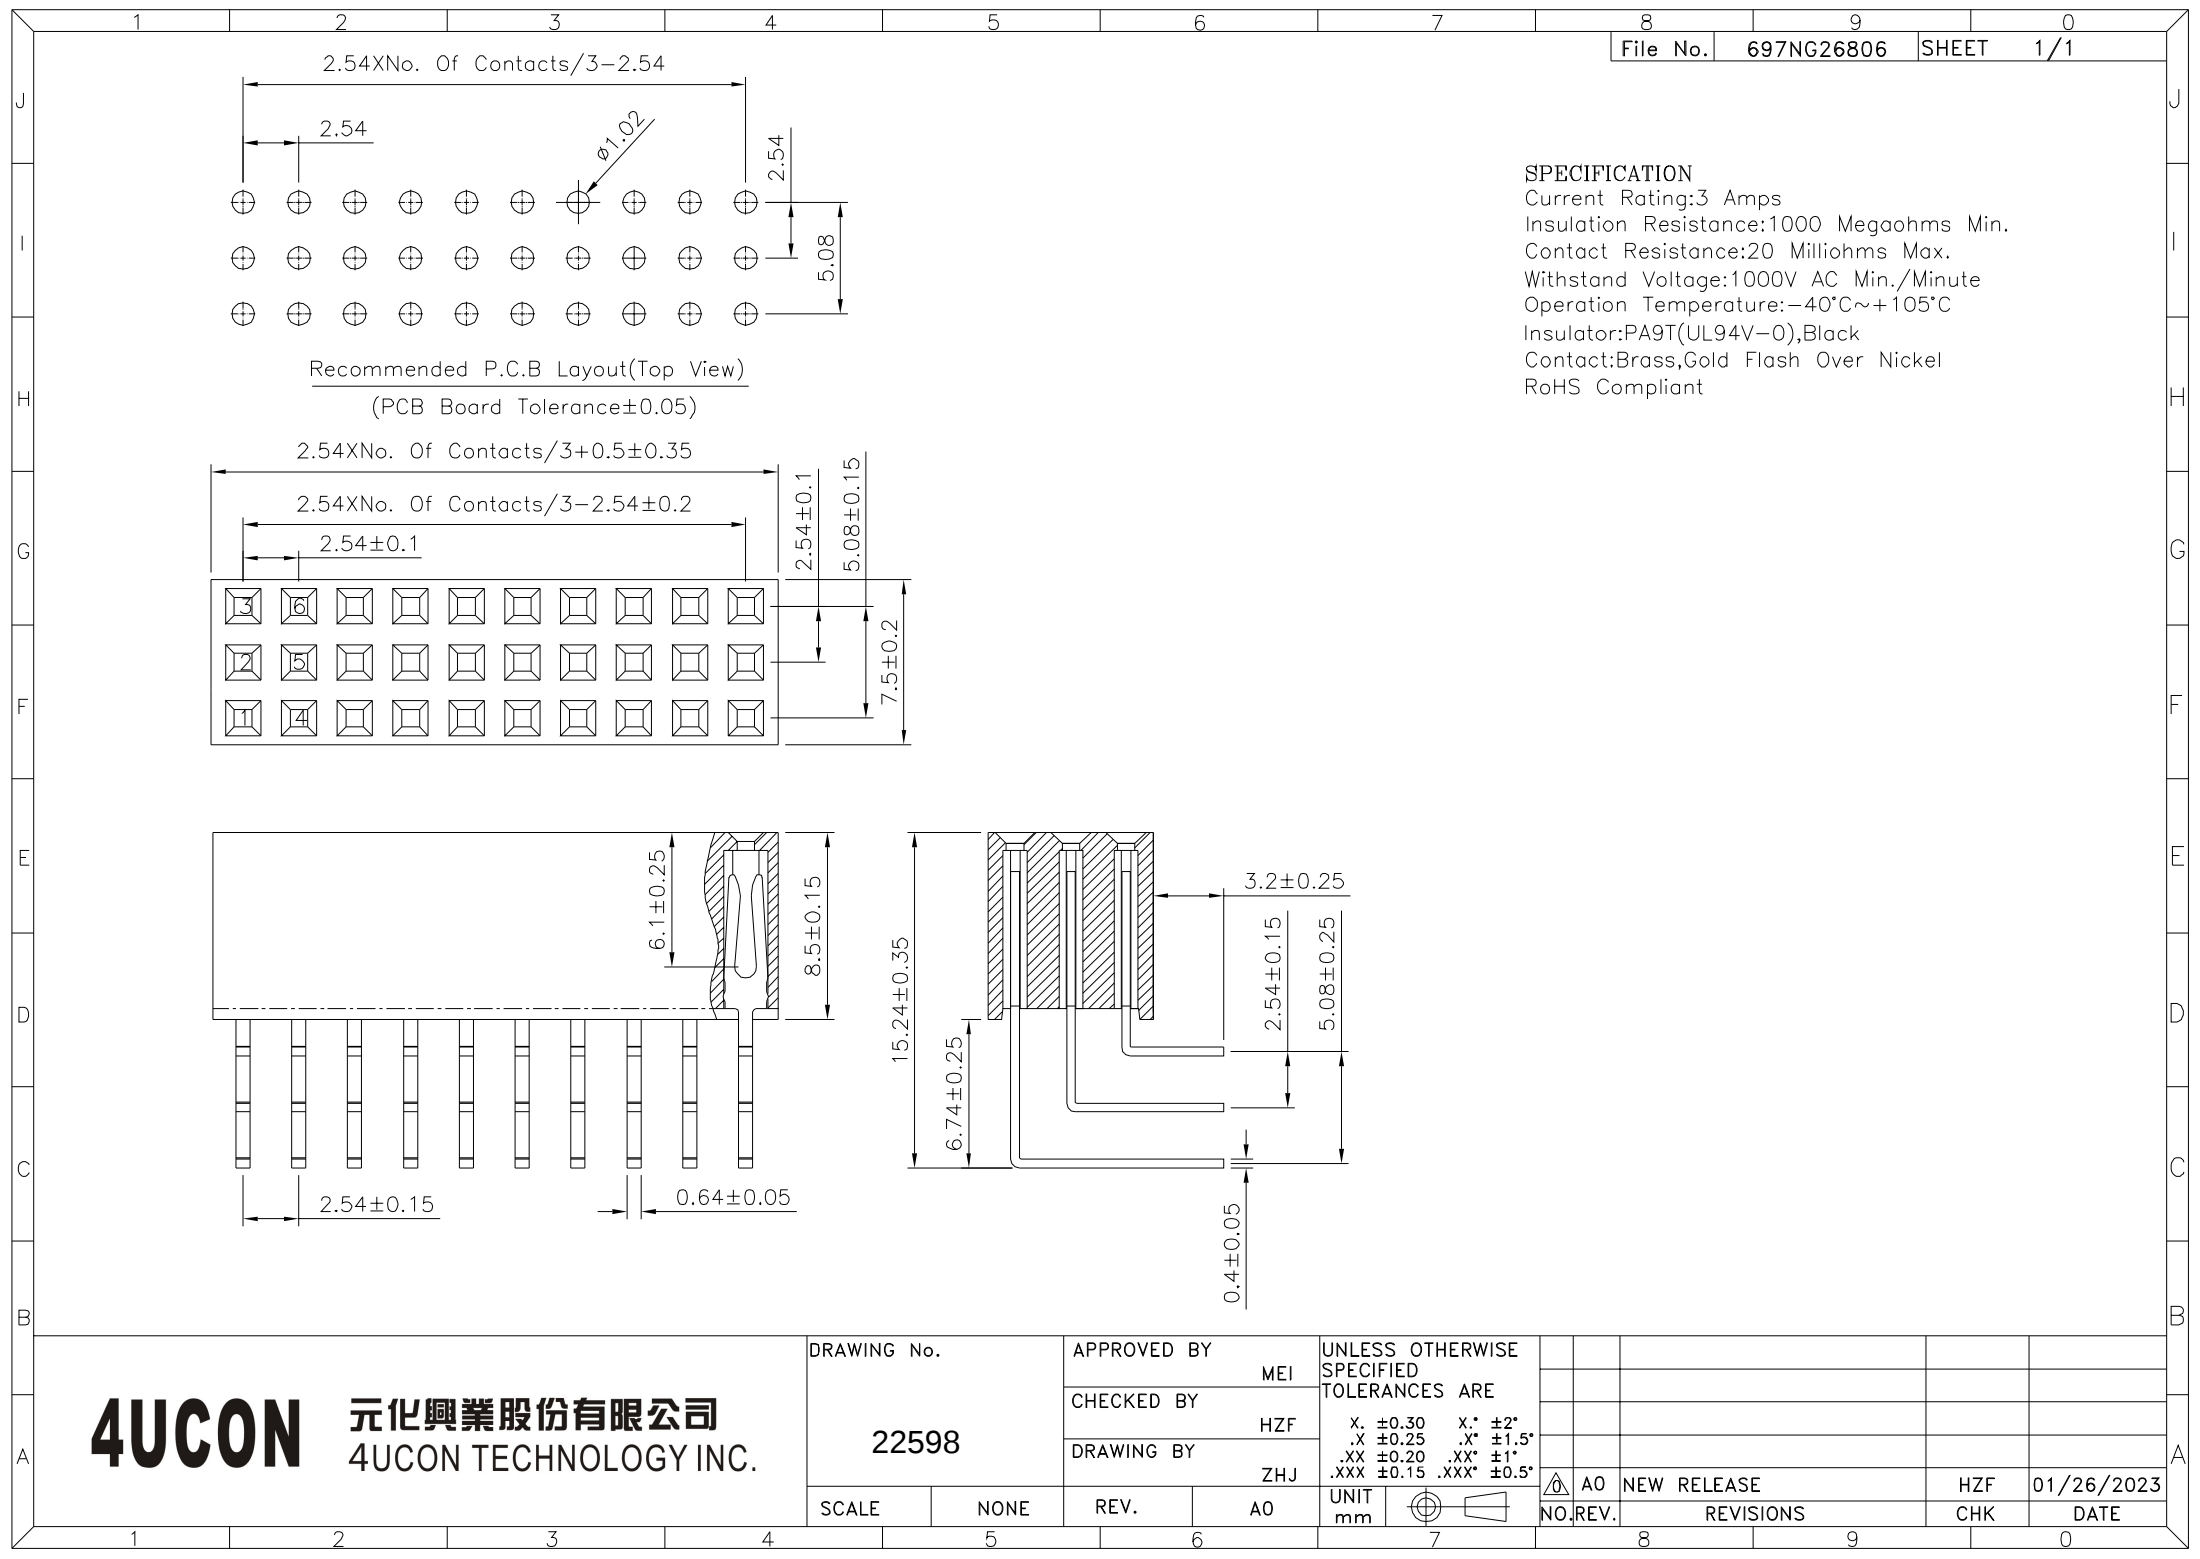

SPECIFICATION
Current Rating:3 Amps
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Withstand Voltage:1000V AC Min./Minute
Operation Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
22598		HZF	
		DRAWING BY	
		ZHZ	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE							
X. ±0.30		X.* ±2°					
.X ±0.25		.X* ±1.5°					
.XX ±0.20		.XX* ±1°					
.XXX ±0.15		.XXX* ±0.5°					
UNIT		mm		△ A0	NEW RELEASE	HZF	01/26/2023
NO. REV.		REVISIONS		CHK	DATE		