

J

I

H

G

F


E

D

C

B

A

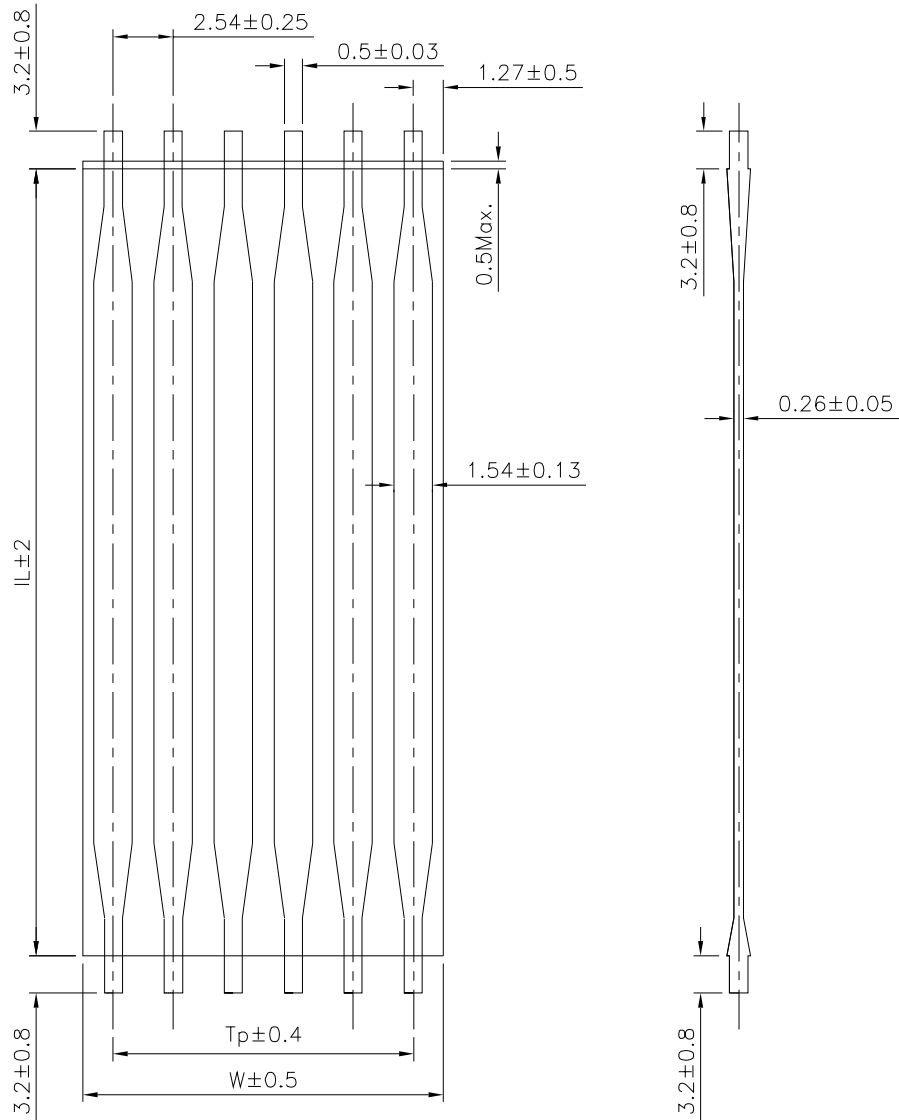

SPECIFICATION
2.54mm Insulating Cable #24AWG
Current Rating:3.0A
Voltage Rating:300V AC
Withstand Voltage:1500V AC/Minute
Conductor:Copper Wire,Tin Plated
Recommended P.C.B. Hole:Ø0.95mm
RoHS Compliant

P/N	Material	Pin	IL	Tp	W	Operation Temperature
22652	NOMEX	6P	76.2	12.7	15.24	-40°C~+105°C
22653	NOMEX	5P	76.2	10.16	12.7	
22654	NOMEX	3P	25.4	5.08	7.62	
22655	NOMEX	5P	50.8	10.16	12.7	
22656	NOMEX	3P	63.5	5.08	7.62	
22657	NOMEX	6P	63.5	12.7	15.24	
22671	NOMEX	4P	25.4	7.62	10.16	
22672	NOMEX	6P	25.4	12.7	15.24	
22673	NOMEX	7P	63.5	15.24	17.78	
22711	NOMEX	14P	152.4	33.02	35.56	
22741	NOMEX	20P	76.2	48.26	50.8	-40°C~+105°C
23110	NOMEX	24P	76.2	58.42	60.96	
23129	NOMEX	4P	76.2	7.62	10.16	
23130	NOMEX	14P	76.2	33.02	35.56	
22674	PET	9P	63.5	20.32	22.86	-40°C~+105°C
22904	PET	6P	50.8	12.7	15.24	-40°C~+105°C
23013	PET	4P	50.8	7.62	10.16	-40°C~+105°C

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22741

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.


B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

UNIT
mm



2	B2	Modify Data		HZF	07/15/2026
1	B1	Modify Data		HZF	05/25/2026
0	B0	NEW RELEASE		HZF	11/12/2025
NO.	REV.	REVISIONS		CHK	DATE