

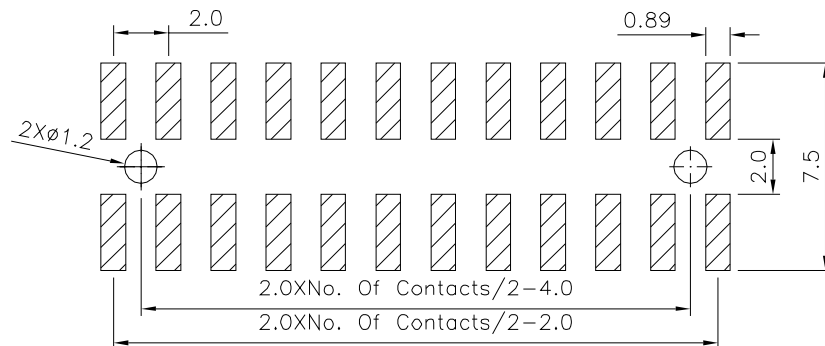
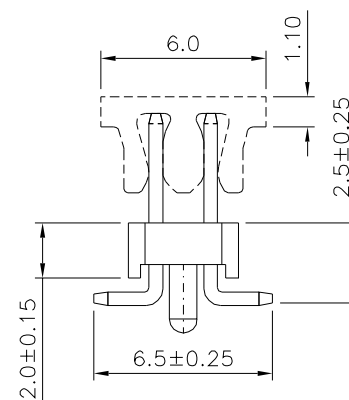


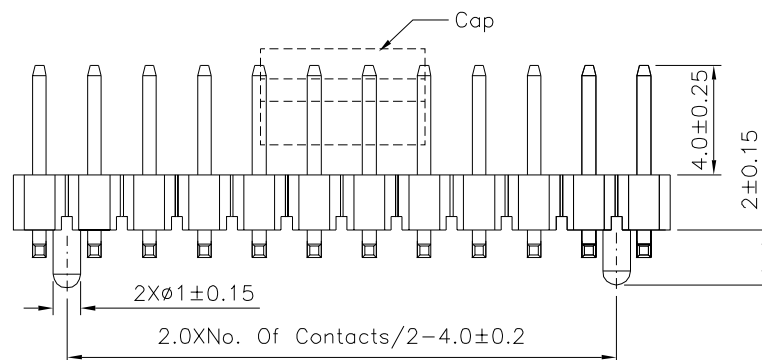

Recommended P.C.B Layout(Top View)
(PCB Board Tolerance±0.05)

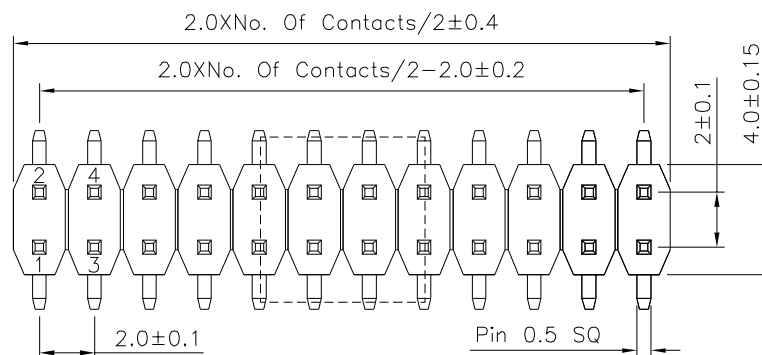

SPECIFICATION

Current Rating:1.5A
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22813

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.± ±2°
.X ±0.20 .X ±1.5°
.XX ±0.15 .XX ±1°
.XXX ±0.10 .XXX ±0.5°

UNIT
mm



NO.

REV.

A1

A0

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

02/10/2025

05/30/2022