

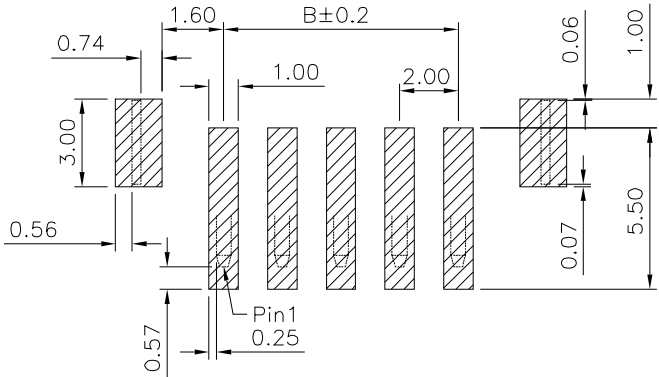
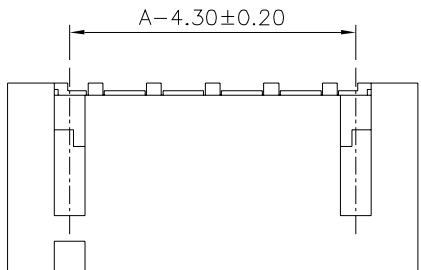


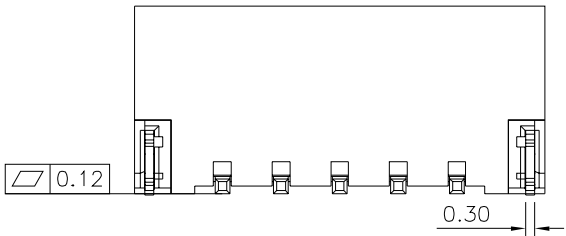


SPECIFICATION

Current Rating:2A AC/DC
Voltage Rating:100V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-40°C~+105°C
Insulator:PA9T(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
Solder Nail:Brass,Tin Plated Over Nickel
RoHS Compliant

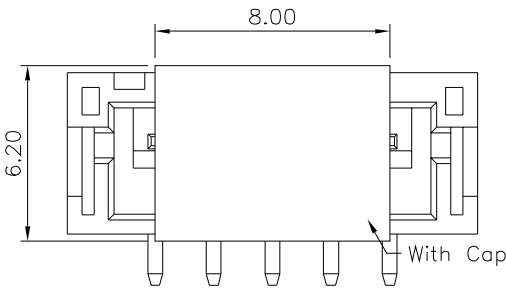

Recommended P.C.B. Layout

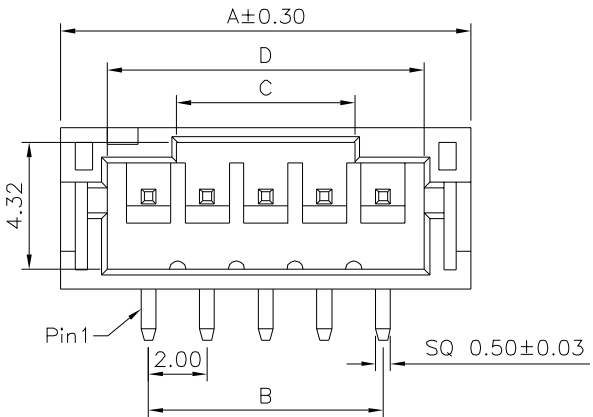

Pin	A	B	C	D
02	8.00	2.00	1.10	4.80
03	10.00	4.00	2.10	6.80
04	12.00	6.00	4.10	8.80
05	14.00	8.00	6.10	10.80
06	16.00	10.00	8.10	12.80
07	18.00	12.00	10.10	14.80
08	20.00	14.00	12.10	16.80
09	22.00	16.00	14.10	18.80
10	24.00	18.00	16.10	20.80
11	26.00	20.00	18.10	22.80
12	28.00	22.00	20.10	24.80
13	30.00	24.00	22.10	26.80
14	32.00	26.00	24.10	28.80
15	34.00	28.00	26.10	30.80
16	36.00	30.00	28.10	32.80

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22958

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30 ANG. ±2°

.XX ±0.20

.XXX ±0.10

UNIT
mm



B1

Modify Data

HZF

10/08/2024



B0

NEW RELEASE

HZF

09/15/2024

NO. REV.

REVISIONS

CHK

DATE