

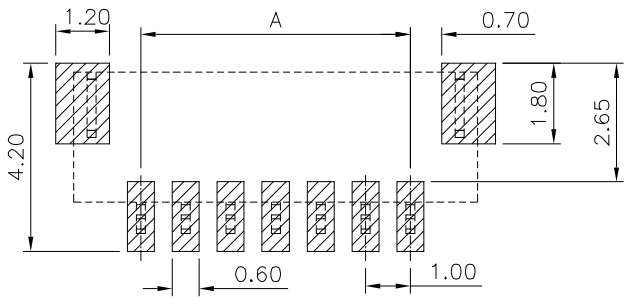
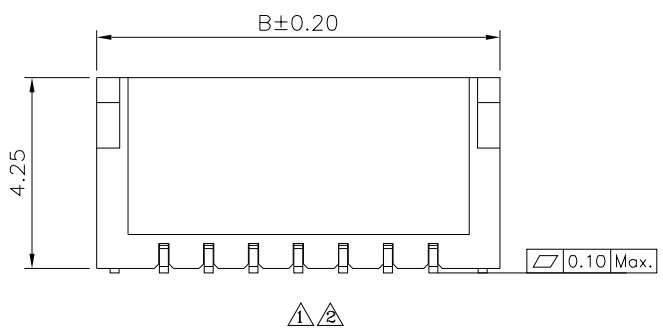


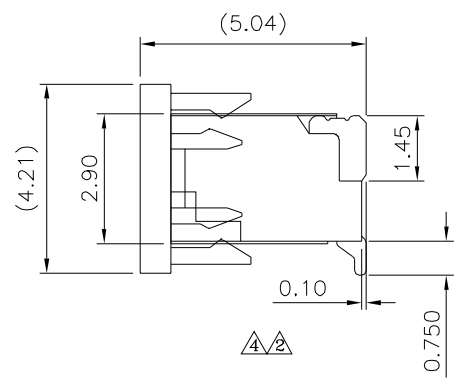

Recommended P.C.B. Layout
Tolerance±0.05

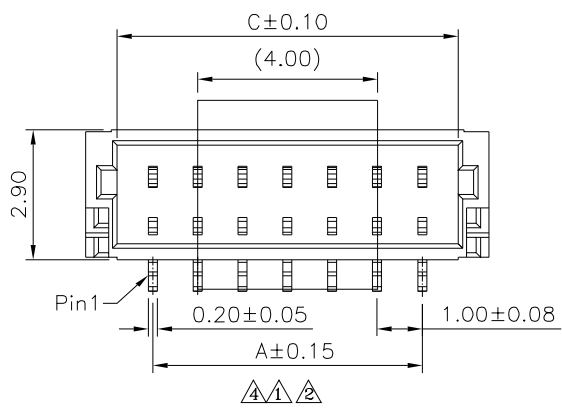

SPECIFICATION

Current Rating:1A AC,DC
Voltage Rating:50V AC,DC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:-40°C~+105°C
Contact:Phosphor Bronze,Tin
Plated Over Nickel
Fitting Nail:Brass,Tin Plated Over Nickel
Insulator:PA9T(UL94V-0),Nature
RoHS Compliant

Pin	A	B	C
02	1.00	4.00	2.49
03	2.00	5.00	3.49
04	3.00	6.00	4.49
05	4.00	7.00	5.49
06	5.00	8.00	6.49
07	6.00	9.00	7.49
08	7.00	10.00	8.49
09	8.00	11.00	9.49
10	9.00	12.00	10.49
11	10.00	13.00	11.49
12	11.00	14.00	12.49
13	12.00	15.00	13.49
14	13.00	16.00	14.49
15	14.00	17.00	15.49
16	15.00	18.00	16.49
17	16.00	19.00	17.49
18	17.00	20.00	18.49
19	18.00	21.00	19.49
20	19.00	22.00	20.49