
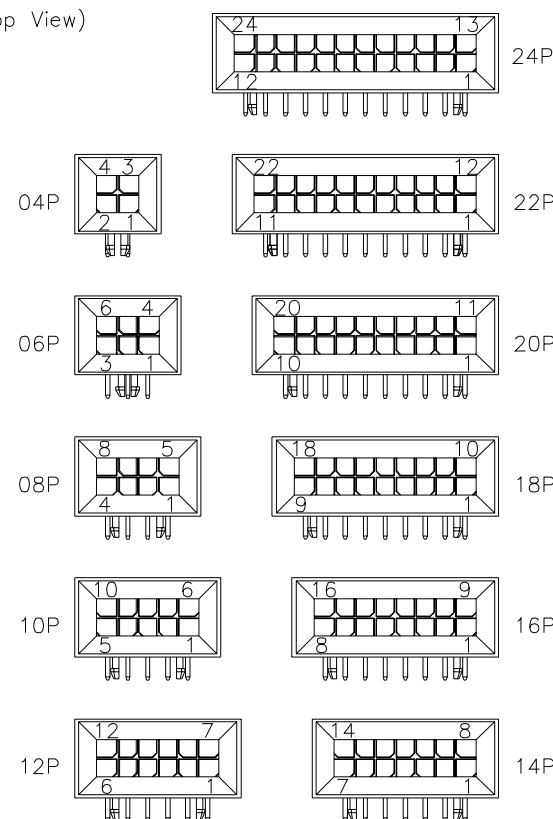
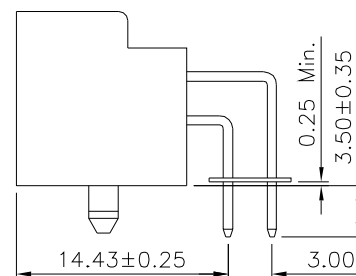
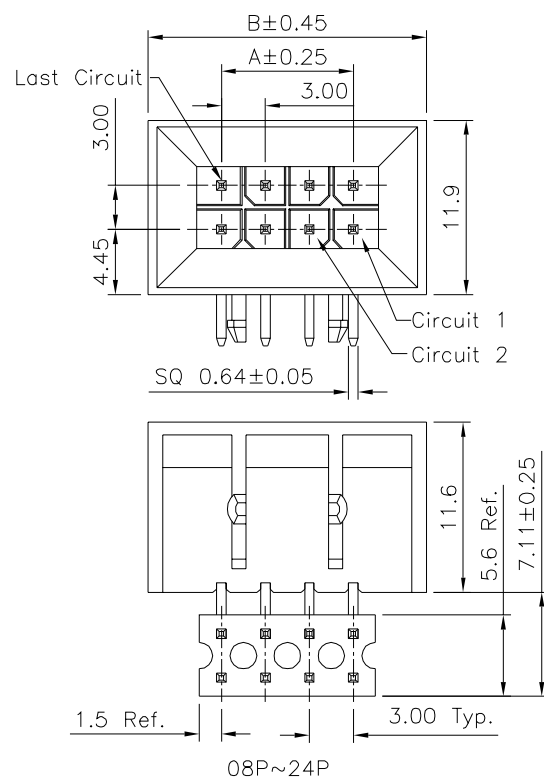
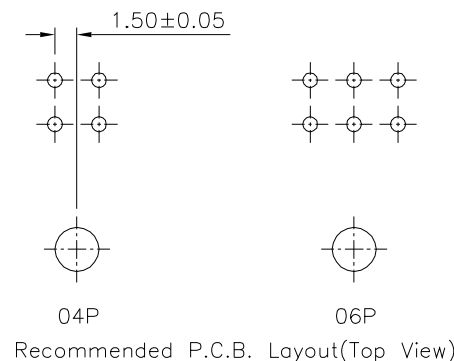


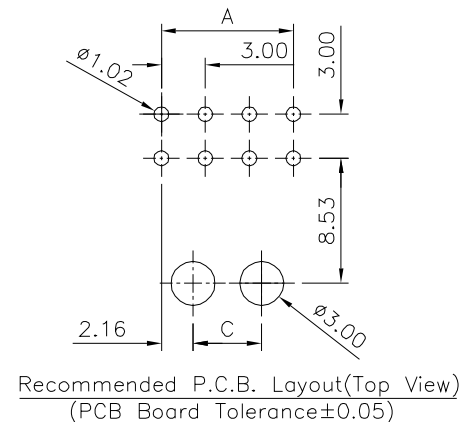

SPECIFICATION

1.Material&Finish

Insulator:PA9T(UL94V-0),Black
Contact:Brass,Tin Plated

2.Electrical Characteristics

Current Rating:5A AC,DC
Voltage Rating:250V AC,DC
Withstanding Voltage:1000V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.

3.Environmental Characteristics

Temperature Range:-25°C~+85°C

4.RoHS Compliant

Pin	A	B	C
04	3.00	13.00	--
06	6.00	16.00	--
08	9.00	19.00	4.68
10	12.00	22.00	7.68
12	15.00	25.00	10.68
14	18.00	28.00	13.68
16	21.00	31.00	16.68
18	24.00	34.00	19.68
20	27.00	37.00	22.68
22	30.00	40.00	25.68
24	33.00	43.00	28.68

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22990

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY


Michelle Lee

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
X ±0.25
XX ±0.20
XXX ±0.05
ANG. ±1°

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

09/27/2019