
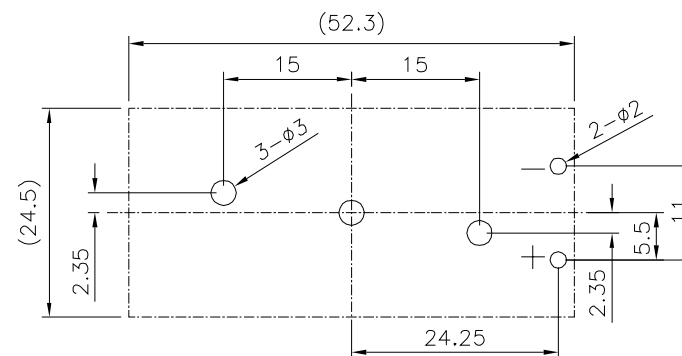
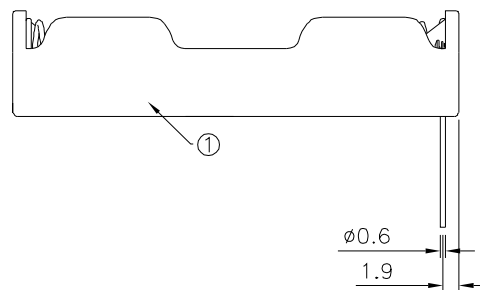



SPECIFICATION

Dielectric Voltage:270V AC One Minute
Operating Temperature:-10°C~+80°C
RoHS Compliant

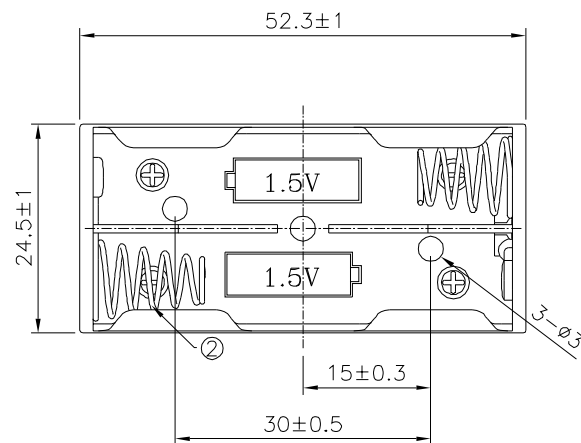

Recommended P.C.B. Layout(Top Side)

No.	Description	Q'ty	Material	Remark
①	Housing	1	PP, No Flameproof	Black
②	Spring	2	Spring Wire $\phi=0.6\text{mm}$	Nickel Plated
③	PC Pins	2	Spring Wire $\phi=0.6\text{mm}$	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23030

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

LZX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ± 0.30	X.* $\pm 1^{\circ}$
.X ± 0.25	.X* $\pm 0.5^{\circ}$
.XX ± 0.20	
.XXX ± 0.10	

	UNIT mm
--	------------



△	AO
NO.	REV

	NEW RELEASE
1/	REVISIONS

HZF
CHK

06/26/2025
DATE